



# PERCONA

**Operator for MySQL based on Percona XtraDB  
Cluster**

## **Documentation**

1.17.0 (April 14, 2025)

# Table of Contents

[Welcome](#)

[Get help from Percona](#)

[Features](#)

[Design and architecture](#)

[Comparison with other solutions](#)

[Quickstart guides](#)

[Overview](#)

[1. Quick install](#)

[Install with Helm](#)

[Install with kubectl](#)

[2. Connect to the database](#)

[3. Insert data](#)

[4. Make a backup](#)

[5. Monitor the database with PMM](#)

[What's next?](#)

[Installation](#)

[System requirements](#)

[Install on Minikube](#)

[Install with Everest](#)

[Install on Google Kubernetes Engine \(GKE\)](#)

[Install on Amazon Elastic Kubernetes Service \(AWS EKS\)](#)

[Install on Microsoft Azure Kubernetes Service \(AKS\)](#)

[Install on OpenShift](#)

[Generic Kubernetes installation](#)

[Multi-cluster and multi-region deployment](#)

[Upgrade](#)

[About upgrades](#)

[Upgrade CRD and the Operator](#)

[Database upgrade overview](#)

[Minor upgrade](#)

[To a specific version](#)

[Automatic minor upgrades](#)

[Manual upgrade](#)

[Upgrade Percona XtraDB Cluster on OpenShift](#)

[Configuration](#)

[Application and system users](#)

[Exposing the cluster](#)

[Changing MySQL Options](#)

[Anti-affinity and tolerations](#)

[Labels and annotations](#)

[Local Storage support](#)

[Defining environment variables](#)

[Load Balancing with HAProxy](#)

[Load Balancing with ProxySQL](#)

[Workload transfer and disaster recovery](#)

[Overview](#)

[Set up the primary site](#)  
[Set up the replica site](#)  
[Configure replication between the sites](#)  
[Promote the replica site to a new primary](#)  
[Restore the previous primary site](#)  
[Transport Encryption \(TLS/SSL\)](#)  
[Data at rest encryption](#)  
[Telemetry](#)

## [Management](#)

### [Backup and restore](#)

[About backups](#)  
[Configure storage for backups](#)  
[Make scheduled backups](#)  
[Make on-demand backup](#)  
[Store binary logs for point-in-time recovery](#)  
[Enable compression for backups](#)  
[Restore from a previously saved backup](#)  
[Copy backup to a local machine](#)  
[Delete the unneeded backup](#)

### [Horizontal and vertical scaling](#)

### [Monitor with Percona Monitoring and Management \(PMM\)](#)

### [Add sidecar containers](#)

### [Restart or pause the cluster](#)

### [Crash recovery](#)

### [Clone a cluster with the same data set](#)

## [Troubleshooting](#)

### [Initial troubleshooting](#)

### [Exec into the container](#)

### [Check the events](#)

### [Check the logs](#)

### [Check storage](#)

### [Special debug images](#)

## [HOWTOs](#)

### [Install the database with customized parameters](#)

### [Provide Percona Operator for MySQL single-namespace and multi-namespace deployment](#)

### [How to use private registry](#)

### [How to restore backup to a new Kubernetes-based environment](#)

### [How to use backups and asynchronous replication to move an external database to Kubernetes](#)

### [Monitor Kubernetes](#)

### [Delete the Operator](#)

## [Reference](#)

### [Custom Resource options](#)

### [Percona certified images](#)

### [Versions compatibility](#)

### [Operator API](#)

### [Frequently Asked Questions](#)

### [Development documentation](#)

### [How we use artificial intelligence](#)

### [Copyright and licensing information](#)

### [Trademark policy](#)

## [Release Notes](#)

### [Release notes index](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.17.0 \(2025-04-14\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.1 \(2024-12-26\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.0 \(2024-12-19\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.1 \(2024-10-16\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.1 \(2024-10-16\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.0 \(2024-08-20\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.0 \(2024-03-04\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.13.0 \(2023-07-11\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.12.0 \(2022-12-07\)](#)  
[Percona Operator for MySQL based on Percona XtraDB Cluster 1.11.0 \(2022-06-03\)](#)  
[Percona Distribution for MySQL Operator 1.10.0 \(2021-11-24\)](#)  
[Percona Distribution for MySQL Operator 1.9.0 \(2021-08-09\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.8.0 \(2021-05-26\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.7.0 \(2021-02-02\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.6.0 \(2020-09-09\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.5.0 \(2020-07-21\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.4.0 \(2020-04-29\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.3.0 \(2020-01-06\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.2.0 \(2019-09-20\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.1.0 \(2019-07-15\)](#)  
[Percona Kubernetes Operator for Percona XtraDB Cluster 1.0.0 \(2019-05-29\)](#)

## [Welcome](#)

### [Get help from Percona](#)

### [Features](#)

#### [Design and architecture](#)

#### [Comparison with other solutions](#)

### [Quickstart guides](#)

#### [Overview](#)

#### [1. Quick install](#)

##### [Install with Helm](#)

##### [Install with kubectl](#)

#### [2. Connect to the database](#)

#### [3. Insert data](#)

#### [4. Make a backup](#)

#### [5. Monitor the database with PMM](#)

#### [What's next?](#)

### [Installation](#)

#### [System requirements](#)

#### [Install on Minikube](#)

#### [Install with Everest](#)

#### [Install on Google Kubernetes Engine \(GKE\)](#)

#### [Install on Amazon Elastic Kubernetes Service \(AWS EKS\)](#)

#### [Install on Microsoft Azure Kubernetes Service \(AKS\)](#)

#### [Install on OpenShift](#)

#### [Generic Kubernetes installation](#)

#### [Multi-cluster and multi-region deployment](#)

### [Upgrade](#)

[About upgrades](#)

[Upgrade CRD and the Operator](#)

[Database upgrade overview](#)

[Minor upgrade](#)

[To a specific version](#)

[Automatic minor upgrades](#)

[Manual upgrade](#)

[Upgrade Percona XtraDB Cluster on OpenShift](#)

## [Configuration](#)

[Application and system users](#)

[Exposing the cluster](#)

[Changing MySQL Options](#)

[Anti-affinity and tolerations](#)

[Labels and annotations](#)

[Local Storage support](#)

[Defining environment variables](#)

[Load Balancing with HAProxy](#)

[Load Balancing with ProxySQL](#)

[Workload transfer and disaster recovery](#)

[Overview](#)

[Set up the primary site](#)

[Set up the replica site](#)

[Configure replication between the sites](#)

[Promote the replica site to a new primary](#)

[Restore the previous primary site](#)

[Transport Encryption \(TLS/SSL\)](#)

[Data at rest encryption](#)

[Telemetry](#)

## [Management](#)

[Backup and restore](#)

[About backups](#)

[Configure storage for backups](#)

[Make scheduled backups](#)

[Make on-demand backup](#)

[Store binary logs for point-in-time recovery](#)

[Enable compression for backups](#)

[Restore from a previously saved backup](#)

[Copy backup to a local machine](#)

[Delete the unneeded backup](#)

[Horizontal and vertical scaling](#)

[Monitor with Percona Monitoring and Management \(PMM\)](#)

[Add sidecar containers](#)

[Restart or pause the cluster](#)

[Crash recovery](#)

[Clone a cluster with the same data set](#)

## [Troubleshooting](#)

[Initial troubleshooting](#)

[Exec into the container](#)

[Check the events](#)

[Check the logs](#)

[Check storage](#)

[Special debug images](#)

## [HOWTOs](#)

[Install the database with customized parameters](#)

[Provide Percona Operator for MySQL single-namespace and multi-namespace deployment](#)

[How to use private registry](#)

[How to restore backup to a new Kubernetes-based environment](#)

[How to use backups and asynchronous replication to move an external database to Kubernetes](#)

[Monitor Kubernetes](#)

[Delete the Operator](#)

## [Reference](#)

[Custom Resource options](#)

[Percona certified images](#)

[Versions compatibility](#)

[Operator API](#)

[Frequently Asked Questions](#)

[Development documentation](#)

[How we use artificial intelligence](#)

[Copyright and licensing information](#)

[Trademark policy](#)

## [Release Notes](#)

[Release notes index](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.17.0 \(2025-04-14\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.1 \(2024-12-26\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.0 \(2024-12-19\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.1 \(2024-10-16\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.1 \(2024-10-16\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.0 \(2024-08-20\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.0 \(2024-03-04\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.13.0 \(2023-07-11\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.12.0 \(2022-12-07\)](#)

[Percona Operator for MySQL based on Percona XtraDB Cluster 1.11.0 \(2022-06-03\)](#)

[Percona Distribution for MySQL Operator 1.10.0 \(2021-11-24\)](#)

[Percona Distribution for MySQL Operator 1.9.0 \(2021-08-09\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.8.0 \(2021-05-26\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.7.0 \(2021-02-02\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.6.0 \(2020-09-09\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.5.0 \(2020-07-21\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.4.0 \(2020-04-29\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.3.0 \(2020-01-06\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.2.0 \(2019-09-20\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.1.0 \(2019-07-15\)](#)

[Percona Kubernetes Operator for Percona XtraDB Cluster 1.0.0 \(2019-05-29\)](#)

# Percona Operator for MySQL Based on Percona XtraDB Cluster

The [Percona Operator for MySQL](#) is a Kubernetes-native solution designed to simplify the deployment, management, and scaling of MySQL clusters built on Percona XtraDB Cluster (PXC). The Operator leverages Kubernetes' orchestration capabilities to automate critical database management tasks, including cluster provisioning, backups, failover, and scaling.

[Percona XtraDB Cluster \(PXC\)](#) is an open-source, enterprise-grade MySQL solution designed for high availability and data consistency. It uses synchronous replication to ensure that data is consistent across all nodes in the cluster. PXC provides fault tolerance, automated failover, and scalability, making it ideal for running highly available MySQL databases in mission-critical environments.

This provides the foundation for the Percona Operator for MySQL, enabling simplified deployment and management of Percona XtraDB Cluster within Kubernetes environments.

What's new in version 1.17.0

---

## Key Features and Benefits

### 1. Automated Deployment and Scaling

- Simplifies the creation of MySQL clusters with minimal configuration.
- Dynamically scales instances based on workload demands, optimizing resource usage.

### 2. High Availability

- Guarantees zero downtime with automated failover mechanisms.
- Utilizes synchronous replication to maintain data consistency across nodes.

### 3. Self-Healing

- Detects and recovers from node failures automatically to maintain cluster health.
- Ensures operational continuity with minimal manual intervention.

### 4. Backup and Restore

- Provides consistent, automated backups to cloud storage or local volumes.
- Enables quick recovery, ensuring data safety and business continuity.

### 5. Enhanced Security

- Supports encryption for data at rest and in transit.
- Integrates with Kubernetes Role-Based Access Control (RBAC) for secure database operations.

### 6. Operational Simplification

- Offers seamless integration with Kubernetes-native tools like [kubectx](#).
- Streamlines database monitoring, management, and troubleshooting.

### 7. Flexibility for Cloud-Native Architectures

- Optimized for public, private, and hybrid cloud deployments.
- Allows unified management of databases across diverse environments.

---

## Use Case

The **Percona Operator for MySQL** is ideal for various scenarios such as providing Database as a Service (DBaaS), ensuring high availability for mission-critical applications, scaling cloud-native applications, and implementing disaster recovery strategies. It is particularly useful for organizations with hybrid or multi-cloud infrastructures, where it simplifies the deployment and management of MySQL clusters across multiple environments. The Operator also benefits development and testing teams by enabling quick spin-up of MySQL clusters for testing and development purposes, helping to accelerate product development cycles and reduce operational overhead.

---

Being part of the open-source ecosystem, the Percona Operator benefits from community contributions and support, ensuring that it remains stable and robust over time.

If you're interested in contributing, feel free to: - [Open an issue](#) - Submit a [pull request](#)

For support or inquiries, [contact Percona](#).



# Get help from Percona

Our documentation guides are packed with information, but they can't cover everything you need to know about Percona Operator for MySQL Based on Percona XtraDB Cluster. They also won't cover every scenario you might come across. Don't be afraid to try things out and ask questions when you get stuck.

## Percona's Community Forum

Be a part of a space where you can tap into a wealth of knowledge from other database enthusiasts and experts who work with Percona's software every day. While our service is entirely free, keep in mind that response times can vary depending on the complexity of the question. You are engaging with people who genuinely love solving database challenges.

We recommend visiting our [Community Forum](#). It's an excellent place for discussions, technical insights, and support around Percona database software. If you're new and feeling a bit unsure, our [FAQ](#) and [Guide for New Users](#) ease you in.

If you have thoughts, feedback, or ideas, the community team would like to hear from you at [Any ideas on how to make the forum better?](#). We're always excited to connect and improve everyone's experience.

## Percona experts

Percona experts bring years of experience in tackling tough database performance issues and design challenges.

We understand your challenges when managing complex database environments. That's why we offer various services to help you simplify your operations and achieve your goals.

Service	Description
24/7 Expert Support	Our dedicated team of database experts is available 24/7 to assist you with any database issues. We provide flexible support plans tailored to your specific needs.
Hands-On Database Management	Our managed services team can take over the day-to-day management of your database infrastructure, freeing up your time to focus on other priorities.
Expert Consulting	Our experienced consultants provide guidance on database topics like architecture design, migration planning, performance optimization, and security best practices.
Comprehensive Training	Our training programs help your team develop skills to manage databases effectively, offering virtual and in-person courses.


We're here to help you every step of the way. Whether you need a quick fix or a long-term partnership, we're ready to provide your expertise and support.

# Features

## Design overview

Percona XtraDB Cluster integrates Percona Server for MySQL running with the XtraDB storage engine, and Percona XtraBackup with the Galera library to enable synchronous multi-primary replication.

The design of the Operator is highly bound to the Percona XtraDB Cluster high availability implementation, which in its turn can be briefly described with the following diagram.

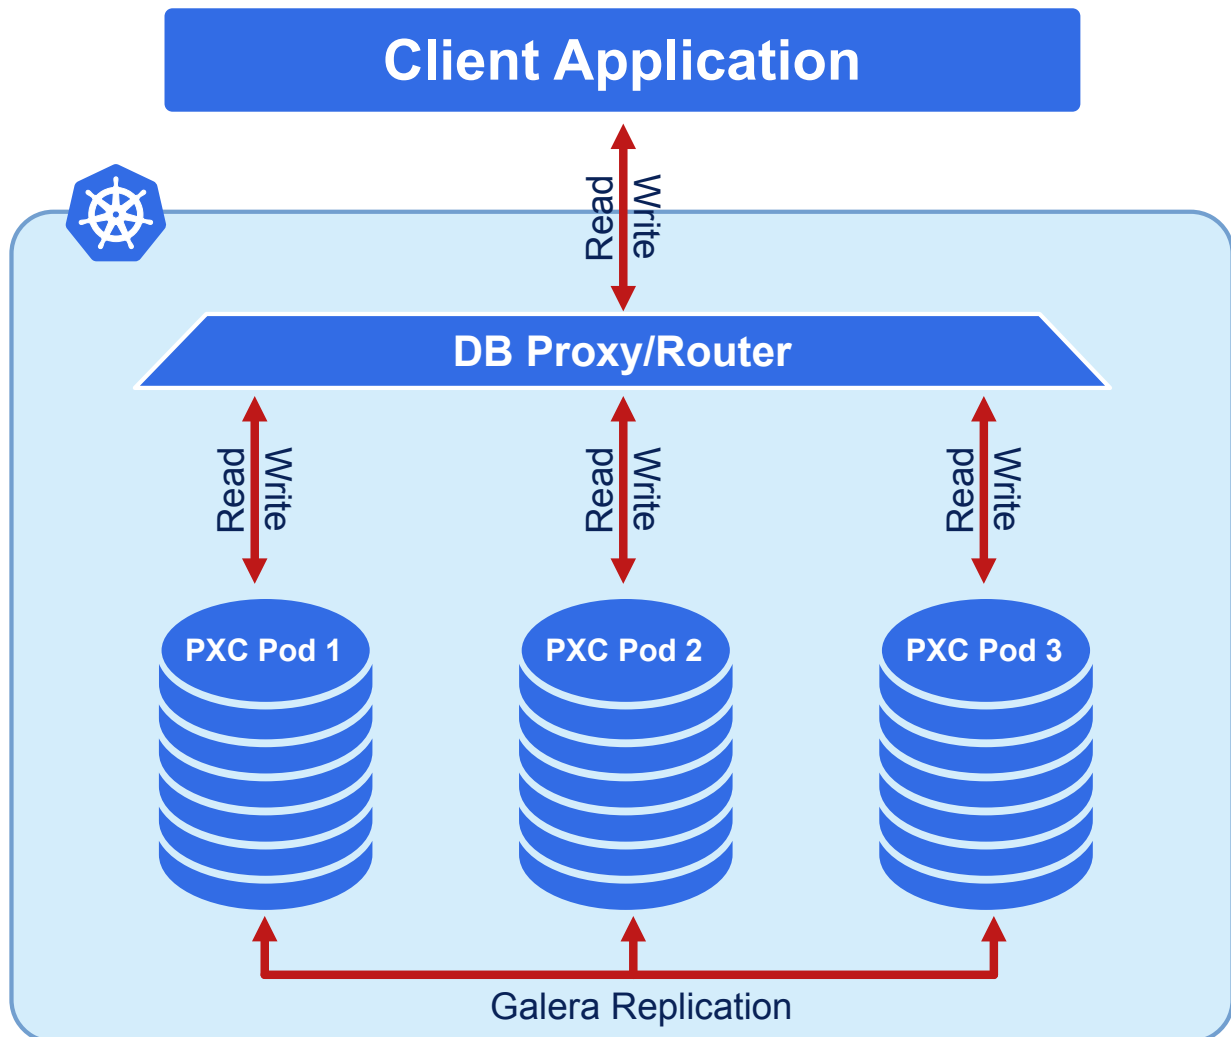


Being a regular MySQL Server instance, each node contains the same set of data synchronized across nodes. The recommended configuration is to have at least 3 nodes. In a basic setup with this amount of nodes, Percona XtraDB Cluster provides high availability, continuing to function if you take any of the nodes down. Additionally load balancing can be achieved with the HAProxy router, which accepts incoming traffic from MySQL clients and forwards it to backend MySQL servers.

### Note

Optionally the Operator allows using ProxySQL daemon instead of HAProxy, which provides [SQL-aware database workload management](#) and can be more efficient in comparison with other load balancers.

To provide high availability operator uses [node affinity](#) to run Percona XtraDB Cluster instances on separate worker nodes if possible. If some node fails, the pod with it is automatically re-created on another node.

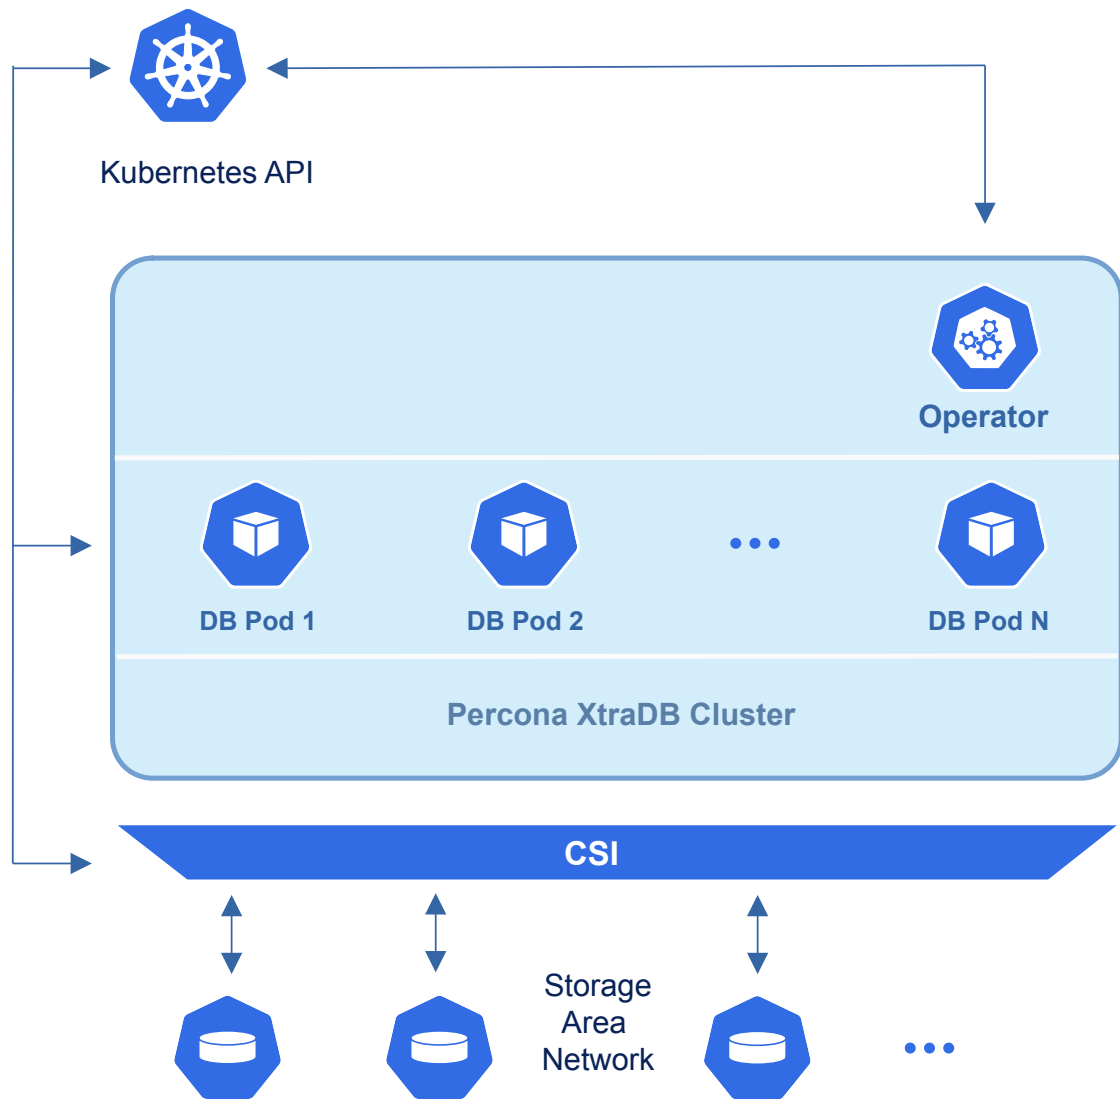

To provide data storage for stateful applications, Kubernetes uses Persistent Volumes. A *PersistentVolumeClaim* (PVC) is used to implement the automatic storage provisioning to pods. If a failure occurs, the Container Storage Interface (CSI) should be able to re-mount storage on a different node. The PVC StorageClass must support this feature (Kubernetes and OpenShift support this in versions 1.9 and 3.9 respectively).

The Operator functionality extends the Kubernetes API with *PerconaXtraDBCluster* object, and it is implemented as a golang application. Each *PerconaXtraDBCluster* object maps to one separate Percona XtraDB Cluster setup. The Operator listens to all events on the created objects. When a new *PerconaXtraDBCluster* object is created, or an existing one undergoes some changes or deletion, the operator automatically creates/changes/deletes all needed Kubernetes objects with the appropriate settings to provide a proper Percona XtraDB Cluster operation.

# Compare various solutions to deploy MySQL in Kubernetes

There are multiple ways to deploy and manage MySQL in Kubernetes. Here we will focus on comparing the following open source solutions:

- [KubeDB](#)
- [Bitpoke MySQL Operator \(former Presslabs\)](#)
- [Oracle MySQL Operator](#)
- [Moco](#) by Cybozu
- [Vitess Operator](#) by PlanetScale
- Percona Operator for MySQL
  - [based on Percona XtraDB Cluster](#)
  - [based on Percona Server for MySQL](#)

## Generic

The review of generic features, such as supported MySQL versions, open source models and more.

Feature/Product	Percona Operator for MySQL (based on PXC)	Percona Operator for MySQL (based on PS)	Bitpoke MySQL Operator	Moco	Oracle MySQL Operator	Vitess
Open source model	Apache 2.0	Apache 2.0	Apache 2.0	Apache 2.0	Apache 2.0	Apache 2.0
MySQL versions	5.7, 8.0	8.0	5.7	8.0	8.0	5.7, 8.0
Kubernetes conformance	Various versions are tested	Various versions are tested	Not guaranteed	Not guaranteed	Not guaranteed	Not guaranteed
Paid support	✓	✓	✗	✗	✓	✗
Web-based GUI	<a href="#">Percona Everest</a>	✗	✗	✗	<a href="#">Oracle Enterprise Manager</a>	✗

## MySQL Topologies

Focus on replication capabilities and proxies integrations.

Feature/Product	Percona Operator for MySQL (based on PXC)	Percona Operator for MySQL (based on PS)	Bitpoke MySQL Operator	Moco	Oracle MySQL Operator	Vitess
Replication	Sync with Galera	Async and Group Replication	Async	Semi-sync	Group Replication	Async
Proxy	HAProxy and ProxySQL	HAProxy and MySQL Router	None	None	MySQL Router	VTGate
Multi-cluster deployment	✓	✗	✗	✗	✗	✗
Sharding	✗	✗	✗	✗	✗	✓

## Backups

Here are the backup and restore capabilities of each solution.

Feature/Product	Percona Operator for MySQL (based on PXC)	Percona Operator for MySQL (based on PS)	Bitpoke MySQL Operator	Moco	Oracle MySQL Operator	Vitess
Scheduled backups	✓	✓	✓	✓	✓	✓
Incremental backups	✗	✗	✗	✓	✗	✗
PITR	✓	✗	✗	✗	✗	✗
PVCs for backups	✓	✗	✗	✗	✓	✗

## Monitoring

Monitoring is crucial for any operations team.

Feature/Product	Percona Operator for MySQL (based on PXC)	Percona Operator for MySQL (based on PS)	Bitpoke MySQL Operator	Moco	Oracle MySQL Operator	Vitess
Custom exporters	Through sidecars	Through sidecars	mysqld_exporter	mysqld_exporter	✗	✗
PMM	✓	✓	✗	✗	✗	✗

## Miscellaneous

Compare various features that are not a good fit for other categories.

Feature/Product	Percona Operator for MySQL (based on PXC)	Percona Operator for MySQL (based on PS)	Bitpoke MySQL Operator	Moco	Oracle MySQL Operator	Vitess
Customize MySQL	ConfigMaps and Secrets	ConfigMaps and Secrets	ConfigMaps	ConfigMaps	ConfigMaps	✗
Helm	✓	✓	✓	✓	✓	✗
Transport encryption	✓	✓	✗	✗	✓	✓
Encryption-at-rest	✓	✓	✗	✗	✗	✗

# Quickstart guides

# Overview

Ready to get started with the Percona Operator for MySQL? In this section, you will learn some basic operations, such as:

- Install and deploy an Operator
- Connect to MySQL instance in Percona XtraDB Cluster
- Insert sample data to the database
- Set up and make a logical backup
- Monitor the database health with Percona Monitoring and Management (PMM)

## Next steps

[Install the Operator →](#)



# 1. Quick install

# Install Percona XtraDB Cluster using Helm

[Helm](#) is the package manager for Kubernetes. Percona Helm charts can be found in [percona/percona-helm-charts](#) repository on Github.

## Pre-requisites

1. The **Helm** package manager. Install it [following the official installation instructions](#).

### Note

Helm v3 is needed to run the following steps.

2. The **kubectl** tool to manage and deploy applications on Kubernetes. Install it [following the official installation instructions](#).

## Installation

Here's a sequence of steps to follow:

- 1 Add the Percona's Helm charts repository and make your Helm client up to date with it:

```
$ helm repo add percona https://percona.github.io/percona-helm-charts/
$ helm repo update
```

- 2 It is a good practice to isolate workloads in Kubernetes via namespaces. Create a namespace:

```
$ kubectl create namespace <namespace>
```

- 3 Install the Percona Operator for MySQL based on Percona XtraDB Cluster:

```
$ helm install my-op percona/pxc-operator --namespace <namespace>
```

The `namespace` is the name of your namespace. The `my-op` parameter in the above example is the name of [a new release object](#) which is created for the Operator when you install its Helm chart (use any name you like).

- 4 Install Percona XtraDB Cluster:

```
$ helm install my-db percona/pxc-db --namespace <namespace>
```

The `my-db` parameter in the above example is the name of [a new release object](#) which is created for the Percona XtraDB Cluster when you install its Helm chart (use any name you like).

- 5 Check the Operator and the Percona XtraDB Cluster Pods status.

```
$ kubectl get pxc -n <namespace>
```

The creation process may take some time. When the process is over your cluster obtains the `ready` status.

### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	33d

You have successfully installed and deployed the Operator with default parameters.

This deploys default Percona XtraDB Cluster configuration with three HAProxy and three XtraDB Cluster instances.

You can find in the documentation for the charts, which [Operator](#) and [database](#) parameters can be customized during installation. Also you can check the rest of the Operator's parameters in the [Custom Resource options reference](#).

## Next steps

[Connect to Percona XtraDB Cluster →](#)

## Useful links

[Install Percona XtraDB Cluster with customized parameters](#)

# Install Percona XtraDB Cluster using kubectl

A Kubernetes Operator is a special type of controller introduced to simplify complex deployments. The Operator extends the Kubernetes API with custom resources.

The [Percona Operator for MySQL based on XtraDB Cluster](#) is based on best practices for configuration and setup of a [Percona Server for MySQL](#) in a Kubernetes-based environment on-premises or in the cloud.

We recommend installing the Operator with the [kubectl](#) command line utility. It is the universal way to interact with Kubernetes. Alternatively, you can install it using the [Helm](#) package manager.

[Install with kubectl](#) ↓

[Install with Helm](#) →

## Prerequisites

To install Percona XtraDB Cluster, you need the following:

1. The **kubectl** tool to manage and deploy applications on Kubernetes, included in most Kubernetes distributions. Install not already installed, [follow its official installation instructions](#).
2. A Kubernetes environment. You can deploy it on [Minikube](#) for testing purposes or using any cloud provider of your choice. Check the list of our [officially supported platforms](#).

### See also

- [Set up Minikube](#)
- [Create and configure the GKE cluster](#)
- [Set up Amazon Elastic Kubernetes Service](#)
- [Create and configure the AKS cluster](#)

## Procedure

Here's a sequence of steps to follow:

- 1 Create the Kubernetes namespace for your cluster. It is a good practice to isolate workloads in Kubernetes by installing the Operator in a custom namespace. Replace the `<namespace>` placeholder with your value.

```
$ kubectl create namespace <namespace>
```

### Expected output

```
namespace/<namespace> was created
```

- 2 Deploy the Operator with the following command:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/bundle.yaml -n <namespace>
```

#### Expected output

```
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusters.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterbackups.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterrestores.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbbackups.pxc.percona.com created
role.rbac.authorization.k8s.io/percona-xtradb-cluster-operator created
serviceaccount/percona-xtradb-cluster-operator created
rolebinding.rbac.authorization.k8s.io/service-account-percona-xtradb-cluster-operator created
deployment.apps/percona-xtradb-cluster-operator created
```

As the result you will have the Operator Pod up and running.

### 3 Deploy Percona XtraDB Cluster:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr.yaml -n <namespace>
```

#### Expected output

```
perconaxtradbcluster.pxc.percona.com/ cluster1 created
```

### 4 Check the Operator and the Percona XtraDB Cluster Pods status.

```
$ kubectl get pxc -n <namespace>
```

The creation process may take some time. When the process is over your cluster obtains the `ready` status.

#### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

You have successfully installed and deployed the Operator with default parameters.

The default Percona XtraDB Cluster configuration includes three HAProxy and three XtraDB Cluster instances.

You can check the rest of the Operator's parameters in the [Custom Resource options reference](#).

## Next steps

[Connect to Percona XtraDB Cluster →](#)

## Useful links

[Install Percona XtraDB Cluster with customized parameters](#)

## 2. Connect to Percona XtraDB Cluster

In this tutorial, you will connect to the Percona XtraDB Cluster you deployed previously.

To connect to Percona XtraDB Cluster you will need the password for the `root` user. Passwords are stored in the Secrets object.

Here's how to get it:

- 1 List the Secrets objects

```
$ kubectl get secrets -n <namespace>
```

The Secrets object we target is named as `<cluster_name>-secrets`. The `<cluster_name>` value is the [name of your Percona XtraDB Cluster](#). The default variant for the Secrets object is:

**via kubectl**

```
cluster1-secrets
```

**via Helm**

```
cluster1-pxc-db-secrets
```

- 2 Retrieve the password for the root user. Replace the `secret-name` and `namespace` with your values in the following commands:

```
$ kubectl get secret <secret-name> -n <namespace> --template='{{.data.root | base64decode}}{\n}'
```

1. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the correspondent Pod.

2. Connect to Percona XtraDB Cluster. To do this, run `mysql` tool in the `percona-client` command shell using your cluster name and the password obtained from the secret. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#). If your password contains special characters, they may be interpreted by the shell, and you may get "Permission denied" messages, so put the password in single quotes (single quotes also avoid variable expansion in scripts):

**with HAProxy (default)**

```
$ mysql -h <cluster_name>-haproxy -uroot -p'<root_password>'
```

**with ProxySQL**

```
$ mysql -h <cluster_name>-proxysql -uroot -p'<root_password>'
```

Congratulations! You have connected to Percona XtraDB Cluster.

### Next steps

[Insert sample data →](#)

### 3. Insert sample data

In this tutorial you will learn to insert sample data to Percona Server for MySQL.

We will enter SQL statements via the same MySQL shell we used to [connect to the database](#).

1 Let's create a separate database for our experiments:

```
CREATE DATABASE mydb;  
use mydb;
```

#### Output

```
Query OK, 1 row affected (0.01 sec)  
Database changed
```

2 Now let's create a table which we will later fill with some sample data:

```
CREATE TABLE extraordinary_gentlemen (  
  id int NOT NULL AUTO_INCREMENT,  
  name varchar(255) NOT NULL,  
  occupation varchar(255),  
  PRIMARY KEY (id)  
);
```

#### Output

```
Query OK, 0 rows affected (0.04 sec)
```

3 Adding data to the newly created table will look as follows:

```
INSERT INTO extraordinary_gentlemen (name, occupation)  
VALUES  
("Allan Quartermain", "hunter"),  
("Nemo", "fish"),  
("Dorian Gray", NULL),  
("Tom Sawyer", "secret service agent");
```

#### Output

```
Query OK, 4 rows affected (0.01 sec)  
Records: 4 Duplicates: 0 Warnings: 0
```

4 Query the collection to verify the data insertion

```
SELECT *  
FROM extraordinary_gentlemen;
```

#### Output

```
+-----+-----+-----+  
| id | name           | occupation           |  
+-----+-----+-----+  
| 1 | Allan Quartermain | hunter              |  
| 2 | Nemo             | fish                |  
| 3 | Dorian Gray      | NULL                |  
| 4 | Tom Sawyer       | secret service agent |  
+-----+-----+-----+
```

5 Updating data in the database would be not much more difficult:

```
UPDATE extraordinary_gentlemen
  SET occupation = "submariner"
WHERE name = "Nemo";
```

**Output**

```
Query OK, 1 row affected (0.00 sec)
Rows matched: 1  Changed: 1  Warnings: 0
```

6 Now if you repeat the SQL statement from step 4, you will see the changes take effect:

```
SELECT *
FROM extraordinary_gentlemen;
```

**Output**

```
+-----+-----+-----+
| id | name           | occupation |
+-----+-----+-----+
| 1 | Allan Quartermain | hunter    |
| 2 | Nemo             | submariner |
| 3 | Dorian Gray      | NULL      |
| 4 | Tom Sawyer       | secret service agent |
+-----+-----+-----+
```

## Next steps

[Make a backup →](#)



## 4. Make a backup

In this tutorial, you will learn how to make a logical backup of your data manually. To learn more about backups, see the [Backup and restore](#) section.

### Considerations and prerequisites

In this tutorial, we use the [AWS S3](#) as the backup storage. You need the following S3-related information:

- the name of the S3 storage
- the name of the S3 bucket
- the region - the location of the bucket
- the S3 credentials to be used to access the storage.

If you don't have access to AWS, you can use any S3-compatible storage like [MinIO](#). Also [check the list of supported storages](#).

Also, we will use some files from the Operator repository for setting up backups. So, clone the percona-xtradb-cluster-operator repository:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
$ cd percona-xtradb-cluster-operator
```

#### Note

It is important to specify the right branch with `-b` option while cloning the code on this step. Please be careful.

### Configure backup storage

1 Encode S3 credentials, substituting `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY` with your real values:

#### on Linux

```
$ echo -n 'AWS_ACCESS_KEY_ID' | base64 --wrap=0
$ echo -n 'AWS_SECRET_ACCESS_KEY' | base64 --wrap=0
```

#### on MacOS

```
$ echo -n 'AWS_ACCESS_KEY_ID' | base64
$ echo -n 'AWS_SECRET_ACCESS_KEY' | base64
```

2 Edit the [deploy/backup-secret-s3.yaml](#) example Secrets configuration file and specify the following:

- the `metadata.name` key is the name which you use to refer your Kubernetes Secret
- the base64-encoded S3 credentials

#### deploy/backup/backup-secret-s3.yaml

```
apiVersion: v1
kind: Secret
metadata:
  name: my-cluster-name-backup-s3
type: Opaque
data:
  AWS_ACCESS_KEY_ID: <YOUR_AWS_ACCESS_KEY_ID>
  AWS_SECRET_ACCESS_KEY: <YOUR_AWS_SECRET_ACCESS_KEY>
```

3 Create the Secrets object from this yaml file. Specify your namespace instead of the `<namespace>` placeholder:

```
$ kubectl apply -f deploy/backup/backup-secret-s3.yaml -n <namespace>
```

4 Update your `deploy/cr.yaml` configuration. Specify the following parameters in the `backup` section:

- set the `storages.<NAME>.type` to `s3`. Substitute the `<NAME>` part with some arbitrary name that you will later use to refer this storage when making backups and restores.
- set the `storages.<NAME>.s3.credentialsSecret` to the name you used to refer your Kubernetes Secret (`my-cluster-name-backup-s3` in the previous step).
- specify the S3 bucket name for the `storages.<NAME>.s3.bucket` option
- specify the region in the `storages.<NAME>.s3.region` option. Also you can use the `storages.<NAME>.s3.prefix` option to specify the path (a sub-folder) to the backups inside the S3 bucket. If prefix is not set, backups are stored in the root directory.

```
...
backup:
  ...
  storages:
    s3-us-west:
      type: s3
      s3:
        bucket: "S3-BACKUP-BUCKET-NAME-HERE"
        region: "<AWS_S3_REGION>"
        credentialsSecret: my-cluster-name-backup-s3
  ...
```

If you use a different S3-compatible storage instead of AWS S3, add the `endpointURL` key in the `s3` subsection, which should point to the actual cloud used for backups. This value is specific to the cloud provider. For example, using Google Cloud involves the following `endpointUrl`:

```
endpointUrl: https://storage.googleapis.com
```

5 Apply the configuration. Specify your namespace instead of the `<namespace>` placeholder:

```
$ kubectl apply -f deploy/cr.yaml -n <namespace>
```

## Make a logical backup

Now when you have the [configured storage](#) in your Custom Resource, you can make your first backup.

1 To make a backup, you need the configuration file. Edit the sample [deploy/backup/backup.yaml](#) configuration file and specify the following:

- `metadata.name` - specify the backup name. You will use this name to restore from this backup
- `spec.pxcCluster` - specify the name of your cluster. This is the name you specified when deploying Percona XtraDB Cluster.
- `spec.storageName` - specify the name of your already configured storage.

**deploy/backup/backup.yaml**

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterBackup
metadata:
  finalizers:
    - delete-s3-backup
  name: backup1
spec:
  pxcCluster: cluster1
  clusterName: my-cluster-name
  storageName: s3-us-west
```

2 Apply the configuration. This instructs the Operator to start a backup. Specify your namespace instead of the `<namespace>` placeholder:

```
$ kubectl apply -f deploy/backup/backup.yaml -n <namespace>
```

- 3 Track the backup progress.

```
$ kubectl get pxc-backup -n <namespace>
```

Output						
NAME	CLUSTER	STORAGE	DESTINATION	STATUS	COMPLETED	AGE
backup1	cluster1	s3-us-west	s3://pxc-operator-testing/2023-10-10T16:36:46Z	Running		43s

When the status changes to `Succeeded`, backup is made.

## Troubleshooting

You may face issues with the backup. To identify the issue, you can do the following:

- View the information about the backup with the following command:

```
$ kubectl get pxc-backup <backup-name> -n <namespace> -o yaml
```

- [View the backup-agent logs](#). Use the previous command to find the name of the pod where the backup was made:

```
$ kubectl logs pod/<pod-name> -c xtrabackup -n <namespace>
```

Congratulations! You have made the first backup manually. Want to learn more about backups? See the [Backup and restore](#) section for how to [configure point-in-time recovery](#), and how to [automatically make backups according to the schedule](#).

## Next steps

[Monitor the database →](#)

# 5. Monitor database with Percona Monitoring and Management (PMM)

We recommend to monitor the database with [Percona Monitoring and Management \(PMM\)](#) integrated within the Operator. You can also use [custom monitoring solutions](#), but their deployment is not automated by the Operator and requires manual setup).

In this section you will learn how to monitor Percona XtraDB Cluster with PMM.

PMM is a client/server application. It consists of the [PMM Server](#) and a number of [PMM Clients](#). PMM Clients run on each node with the database you wish to monitor. In Kubernetes, this means that PMM Clients run as sidecar containers for the database Pods.

A PMM Client collects needed metrics and sends the gathered data to the PMM Server. As a user, you connect to the PMM Server to see database metrics on a number of dashboards.

PMM Server and PMM Client are installed separately.

## Install PMM Server

You must have PMM server up and running. You can run PMM Server as a *Docker image*, a *virtual appliance*, or on an *AWS instance*. Please refer to the [official PMM documentation](#) for the installation instructions.

## Install PMM Client

Install PMM Client as a side-car container in your Kubernetes-based environment:

- 1 Authorize PMM Client within PMM Server.

### Token-based authorization (recommended)

1. [Generate the PMM Server API Key](#). Specify the Admin role when getting the API Key.

**Warning:** The API key is not rotated automatically.

- 1 Edit the [deploy/secrets.yaml](#) secrets file and specify the PMM API key for the `pmmserverkey` option.
- 2 Apply the configuration for the changes to take effect.

```
$ kubectl apply -f deploy/secrets.yaml -n <namespace>
```

### Password-based authorization (deprecated since the Operator 1.11.0)

- 1 Check that the `serverUser` key in the [deploy/cr.yaml](#) file contains your PMM Server user name (`admin` by default), and make sure the `pmmserver` key in the [deploy/secrets.yaml](#) secrets file contains the password specified for the PMM Server during its installation
- 2 Apply the configuration for the changes to take effect.

```
$ kubectl apply -f deploy/secrets.yaml -n <namespace>
```

- 2 Update the `pmm` section in the [deploy/cr.yaml](#) file:

- Set `pmm.enabled=true`.
- Specify your PMM Server hostname / an IP address for the `pmm.serverHost` option. The PMM Server IP address should be resolvable and reachable from within your cluster.

```
pmm:  
  enabled: true  
  image: percona/pmm-client:2.44.0  
  serverHost: monitoring-service
```

3 Apply the changes:

```
$ kubectl apply -f deploy/cr.yaml -n <namespace>
```

4 Check that corresponding Pods are not in a cycle of stopping and restarting. This cycle occurs if there are errors on the previous steps:

```
$ kubectl get pods -n <namespace>  
$ kubectl logs <cluster-name>-pxc-0 -c pmm-client -n <namespace>
```

## Check the metrics

Let's see how the collected data is visualized in PMM.

Now you can access PMM via *https* in a web browser, with the login/password authentication, and the browser is configured to show Percona XtraDB Cluster metrics.



## Next steps

[What's next →](#)

## What's next?

Congratulations! You have completed all the steps in the Get started guide.

You have the following options to move forward with the Operator:

- Deepen your monitoring insights by setting up [Kubernetes monitoring with PMM](#)
- Control Pods assignment on specific Kubernetes Nodes by setting up [affinity / anti-affinity](#).
- Ready to adopt the Operator for production use and need to delete the testing deployment? Use [this guide](#) to do it
- You can also try operating the Operator and database clusters via the web interface with [Percona Everest](#)  - an open-source web-based database provisioning tool based on Percona Operators. See [Get started with Percona Everest](#)  on how to start using it

# Installation

# System requirements

The Operator was developed and tested with Percona XtraDB Cluster versions 8.4.3-3.1 (Tech preview), 8.0.41-32.1, and 5.7.44-31.65.

Other options may also work but have not been tested.

## Supported platforms

The following platforms were tested and are officially supported by the Operator 1.17.0:

- [Google Kubernetes Engine \(GKE\)](#)  1.29 - 1.32
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.30 - 1.32
- [Azure Kubernetes Service \(AKS\)](#)  1.30 - 1.32
- [OpenShift](#)  4.14 - 4.18
- [Minikube](#)  1.35.0 based on Kubernetes 1.32.0

Other Kubernetes platforms may also work but have not been tested.

## Resource limits

A cluster running an officially supported platform contains at least three Nodes, with the following resources:

- 2GB of RAM,
- 2 CPU threads per Node for Pods provisioning,
- at least 60GB of available storage for Persistent Volumes provisioning.

## Installation guidelines

Choose how you wish to install the Operator:

- [with Helm](#)
- [with kubectl](#)
- [on Minikube](#)
- [on Google Kubernetes Engine \(GKE\)](#)
- [on Amazon Elastic Kubernetes Service \(AWS EKS\)](#)
- [on Microsoft Azure Kubernetes Service \(AKS\)](#)
- [on Openshift](#)
- [in a Kubernetes-based environment](#)



# Install Percona XtraDB Cluster on Minikube

Installing the Percona Operator for MySQL based on Percona XtraDB Cluster on [minikube](#) is the easiest way to try it locally without a cloud provider. Minikube runs Kubernetes on GNU/Linux, Windows, or macOS system using a system-wide hypervisor, such as VirtualBox, KVM/QEMU, VMware Fusion or Hyper-V. Using it is a popular way to test the Kubernetes application locally prior to deploying it on a cloud.

The following steps are needed to run the Operator and Percona XtraDB Cluster on Minikube:

1. [Install Minikube](#), using a way recommended for your system. This includes the installation of the following three components:

- a. kubectl tool,
- b. a hypervisor, if it is not already installed,
- c. actual Minikube package.

After the installation, run `minikube start --memory=4096 --cpus=3` (parameters increase the virtual machine limits for the CPU cores and memory, to ensure stable work of the Operator). Being executed, this command will download needed virtualized images, then initialize and run the cluster.

2. Deploy the operator with the following command:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/bundle.yaml
```

3. Deploy Percona XtraDB Cluster:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr-minimal.yaml
```

## Note

This deploys one Percona XtraDB Cluster node and one HAProxy node. The [deploy/cr-minimal.yaml](#) is for minimal non-production deployment. For more configuration options please see [deploy/cr.yaml](#) and [Custom Resource Options](#). You can clone the repository with all manifests and source code by executing the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

After editing the needed options, apply your modified `deploy/cr.yaml` file as follows:

```
$ kubectl apply -f deploy/cr.yaml
```

Creation process will take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

## Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
minimal-cluster	minimal-cluster-haproxy.default	ready	3		3	5m51s

## Verifying the cluster operation

It may take ten minutes to get the cluster started. When the `kubectl get pxc` command output shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ kubectl get secrets
```

The Secrets object you are interested in has the `minimal-cluster-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `minimal-cluster-secrets`, if needed):

```
$ kubectl get secret minimal-cluster-secrets -n <namespace> --template='{{.data.root | base64decode}}{\n\''
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

#### with HAProxy (default)



```
$ mysql -h minimal-cluster-haproxy -uroot -p'<root_password>'
```

#### with ProxySQL

```
$ mysql -h minimal-cluster-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

# Install Percona XtraDB Cluster using Everest

[Percona Everest](#)   is an open source cloud-native database platform that helps developers deploy code faster, scale deployments rapidly, and reduce database administration overhead while regaining control over their data, database configuration, and DBaaS costs.

It automates day-one and day-two database operations for open source databases on Kubernetes clusters. Percona Everest provides API and Web GUI to launch databases with just a few clicks and scale them, do routine maintenance tasks, such as software updates, patch management, backups, and monitoring.

You can try it in action by [Installing Percona Everest](#)   and [managing your first cluster](#)  .

# Install Percona XtraDB Cluster on Google Kubernetes Engine (GKE)

This quickstart shows you how to configure the Percona Operator for MySQL based on Percona XtraDB Cluster with the Google Kubernetes Engine. The document assumes some experience with Google Kubernetes Engine (GKE). For more information on the GKE, see the [Kubernetes Engine Quickstart](#).

## Prerequisites

All commands from this quickstart can be run either in the **Google Cloud shell** or in **your local shell**.

To use *Google Cloud shell*, you need nothing but a modern web browser.

If you would like to use *your local shell*, install the following:

1. [gcloud](#). This tool is part of the Google Cloud SDK. To install it, select your operating system on the [official Google Cloud SDK documentation page](#) and then follow the instructions.
2. [kubectl](#). It is the Kubernetes command-line tool you will use to manage and deploy applications. To install the tool, run the following command:

```
$ gcloud auth login
$ gcloud components install kubectl
```

## Configuring default settings for the cluster

You can configure the settings using the `gcloud` tool. You can run it either in the [Cloud Shell](#) or in your local shell (if you have installed Google Cloud SDK locally on the previous step). The following command will create a cluster named `my-cluster-1`:

```
$ gcloud container clusters create my-cluster-1 --project <project ID> --zone us-central1-a --cluster-version 1.32 --
machine-type n1-standard-4 --num-nodes=3
```

### Note

You must edit the above command and other command-line statements to replace the `<project ID>` placeholder with your project ID (see available projects with `gcloud projects list` command). You may also be required to edit the *zone location*, which is set to `us-central1-a` in the above example. Other parameters specify that we are creating a cluster with 3 nodes and with machine type of 4 vCPUs.

You may wait a few minutes for the cluster to be generated, and then you will see it listed in the Google Cloud console (select *Kubernetes Engine* → *Clusters* in the left menu panel):

<input type="checkbox"/>		my-cluster-1	us-central1-a	3	12 vCPUs	45.00 GB	Connect		
--------------------------	--	--------------	---------------	---	----------	----------	---------	--	--

Now you should configure the command-line access to your newly created cluster to make `kubectl` be able to use it.

In the Google Cloud Console, select your cluster and then click the *Connect* shown on the above image. You will see the connect statement configures command-line access. After you have edited the statement, you may run the command in your local shell:

```
$ gcloud container clusters get-credentials my-cluster-1 --zone us-central1-a --project <project name>
```

## Installing the Operator

1. First of all, use your [Cloud Identity and Access Management \(Cloud IAM\)](#) to control access to the cluster. The following command will give you the ability to create Roles and RoleBindings:

```
$ kubectl create clusterrolebinding cluster-admin-binding --clusterrole cluster-admin --user $(gcloud config get-value
core/account)
```

The return statement confirms the creation:

```
clusterrolebinding.rbac.authorization.k8s.io/cluster-admin-binding created
```

2. Create a namespace and set the context for the namespace. The resource names must be unique within the namespace and provide a way to divide cluster resources between users spread across multiple projects.

So, create the namespace and save it in the namespace context for subsequent commands as follows (replace the `<namespace name>` placeholder with some descriptive name):

```
$ kubectl create namespace <namespace name>
$ kubectl config set-context $(kubectl config current-context) --namespace=<namespace name>
```

At success, you will see the message that namespace/ was created, and the context (gke\_) was modified.

Deploy the Operator using the following command:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/bundle.yaml
```

#### Expected output

```
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusters.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterbackups.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterrestores.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbbackups.pxc.percona.com created
role.rbac.authorization.k8s.io/percona-xtradb-cluster-operator created
serviceaccount/percona-xtradb-cluster-operator created
rolebinding.rbac.authorization.k8s.io/service-account-percona-xtradb-cluster-operator created
deployment.apps/percona-xtradb-cluster-operator created
```

3. The operator has been started, and you can deploy Percona XtraDB Cluster:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr.yaml
```

#### Expected output

```
perconaxtradbcluster.pxc.percona.com/ cluster1 created
```

#### Note

This deploys default Percona XtraDB Cluster configuration with three HAProxy and three XtraDB Cluster instances. Please see [deploy/cr.yaml](#) and [Custom Resource Options](#) for the configuration options. You can clone the repository with all manifests and source code by executing the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

After editing the needed options, apply your modified `deploy/cr.yaml` file as follows:

```
$ kubectl apply -f deploy/cr.yaml
```

The creation process may take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

#### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

## Verifying the cluster operation

It may take ten minutes to get the cluster started. When `kubectl get pxc` command finally shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ kubectl get secrets
```

The Secrets object you are interested in has the `cluster1-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `cluster1-secrets`, if needed):

```
$ kubectl get secret cluster1-secrets -n <namespace> --template='{{.data.root | base64decode}}{\n}'
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```

### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

## Troubleshooting

If `kubectl get pxc` command doesn't show `ready` status too long, you can check the creation process with the `kubectl get pods` command:

```
$ kubectl get pods
```

### Expected output

NAME	READY	STATUS	RESTARTS	AGE
cluster1-haproxy-0	2/2	Running	0	6m17s
cluster1-haproxy-1	2/2	Running	0	4m59s
cluster1-haproxy-2	2/2	Running	0	4m36s
cluster1-pxc-0	3/3	Running	0	6m17s
cluster1-pxc-1	3/3	Running	0	5m3s
cluster1-pxc-2	3/3	Running	0	3m56s
percona-xtradb-cluster-operator-79966668bd-rswbk	1/1	Running	0	9m54s

Also, you can see the same information when browsing Pods of your cluster in Google Cloud console via the *Object Browser*:

Name	Status	Type	Cluster
▼ core		API Group	
▼ Pod		Kind	
cluster1-haproxy-0	✔ Running	Pod	my-cluster-1
cluster1-haproxy-1	✔ Running	Pod	my-cluster-1
cluster1-haproxy-2	✔ Running	Pod	my-cluster-1
cluster1-pxc-0	✔ Running	Pod	my-cluster-1
cluster1-pxc-1	✔ Running	Pod	my-cluster-1
cluster1-pxc-2	✔ Running	Pod	my-cluster-1

If the command output had shown some errors, you can examine the problematic Pod with the `kubectl describe <pod name>` command as follows:

```
$ kubectl describe pod cluster1-pxc-2
```

Review the detailed information for Warning statements and then correct the configuration. An example of a warning is as follows:

```
Warning FailedScheduling 68s (x4 over 2m22s) default-scheduler 0/1 nodes are available: 1 node(s) didn't match pod affinity/anti-affinity, 1 node(s) didn't satisfy existing pods anti-affinity rules.
```

Alternatively, you can examine your Pods via the *object browser*. Errors will look as follows:

Name	Status	Type	Cluster
▼ core		API Group	
▼ Pod		Kind	
cluster1-haproxy-0	✔ Running	Pod	my-cluster-1
cluster1-haproxy-1	✔ Running	Pod	my-cluster-1
cluster1-haproxy-2	❗ Unschedulable	Pod	my-cluster-1
cluster1-pxc-0	✔ Running	Pod	my-cluster-1
cluster1-pxc-1	✔ Running	Pod	my-cluster-1
cluster1-pxc-2	❗ Unschedulable	Pod	my-cluster-1

Clicking the problematic Pod will bring you to the details page with the same warning:

### ❗ cluster1-haproxy-2

❗ 0/2 nodes are available: 2 node(s) didn't match pod affinity/anti-affinity, 2 node(s) didn't satisfy existing pods anti-affinity rules.

Show Details

Details Events Logs YAML

1h 6h 1d 7d 30d

## Removing the GKE cluster

There are several ways that you can delete the cluster.

You can clean up the cluster with the `gcloud container clusters delete <cluster name> --zone <zone location>` command. The return statement requests your confirmation of the deletion. Type `y` to confirm.

```
$ gcloud container clusters delete my-cluster-1 --zone us-central1-a --project <project ID>
```




### Expected output

```
The following clusters will be deleted.
- [my-cluster-1] in [us-central1-a]

Do you want to continue (Y/n)? y

Deleting cluster my-cluster-1...:
```

Also, you can delete your cluster via the GKE console. Just click the appropriate trashcan icon in the clusters list:

<input type="checkbox"/>	 my-cluster-1	us-central1-a	3	12 vCPUs	45.00 GB	Connect	 
--------------------------	--	---------------	---	----------	----------	---------	---

The cluster deletion may take time.



# Install Percona XtraDB Cluster on Amazon Elastic Kubernetes Service (EKS)

This quickstart shows you how to deploy the Operator and Percona XtraDB Cluster on Amazon Elastic Kubernetes Service (EKS). The document assumes some experience with Amazon EKS. For more information on the EKS, see the [Amazon EKS official documentation](#).

## Prerequisites

The following tools are used in this guide and therefore should be preinstalled:

1. **AWS Command Line Interface (AWS CLI)** for interacting with the different parts of AWS. You can install it following the [official installation instructions for your system](#).
2. **eksctl** to simplify cluster creation on EKS. It can be installed along its [installation notes on GitHub](#).
3. **kubectl** to manage and deploy applications on Kubernetes. Install it [following the official installation instructions](#).

Also, you need to configure AWS CLI with your credentials according to the [official guide](#).

## Create the EKS cluster

1. To create your cluster, you will need the following data:

- name of your EKS cluster,
- AWS region in which you wish to deploy your cluster,
- the amount of nodes you would like to have,
- the desired ratio between [on-demand](#) and [spot](#) instances in the total number of nodes.

### Note

[spot](#) instances are not recommended for production environment, but may be useful e.g. for testing purposes.

After you have settled all the needed details, create your EKS cluster [following the official cluster creation instructions](#).

2. After you have created the EKS cluster, you also need to [install the Amazon EBS CSI driver](#) on your cluster. See the [official documentation](#) on adding it as an Amazon EKS add-on.

## Install the Operator

1. Create a namespace and set the context for the namespace. The resource names must be unique within the namespace and provide a way to divide cluster resources between users spread across multiple projects.

So, create the namespace and save it in the namespace context for subsequent commands as follows (replace the `<namespace name>` placeholder with some descriptive name):

```
$ kubectl create namespace <namespace name>
$ kubectl config set-context $(kubectl config current-context) --namespace=<namespace name>
```

At success, you will see the message that namespace/ was created, and the context was modified.

Deploy the Operator using the following command:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/bundle.yaml
```

#### Expected output

```
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusters.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterbackups.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterrestores.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbbackups.pxc.percona.com created
role.rbac.authorization.k8s.io/percona-xtradb-cluster-operator created
serviceaccount/percona-xtradb-cluster-operator created
rolebinding.rbac.authorization.k8s.io/service-account-percona-xtradb-cluster-operator created
deployment.apps/percona-xtradb-cluster-operator created
```

2. The operator has been started, and you can deploy Percona XtraDB Cluster:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr.yaml
```

#### Expected output

```
perconaxtradbcluster.pxc.percona.com/ cluster1 created
```

#### Note

This deploys default Percona XtraDB Cluster configuration with three HAProxy and three XtraDB Cluster instances. Please see [deploy/cr.yaml](#) and [Custom Resource Options](#) for the configuration options. You can clone the repository with all manifests and source code by executing the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

After editing the needed options, apply your modified `deploy/cr.yaml` file as follows:

```
$ kubectl apply -f deploy/cr.yaml
```

The creation process may take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

#### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

## Verifying the cluster operation

It may take ten minutes to get the cluster started. When `kubectl get pxc` command finally shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ kubectl get secrets
```

The Secrets object you are interested in has the `cluster1-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `cluster1-secrets`, if needed):

```
$ kubectl get secret cluster1-secrets -n <namespace> --template='{{.data.root | base64decode}}{\n}'
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

#### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```

#### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

## Troubleshooting

If `kubectl get pxc` command doesn't show `ready` status too long, you can check the creation process with the `kubectl get pods` command:

```
$ kubectl get pods
```

#### Expected output

NAME	READY	STATUS	RESTARTS	AGE
cluster1-haproxy-0	2/2	Running	0	6m17s
cluster1-haproxy-1	2/2	Running	0	4m59s
cluster1-haproxy-2	2/2	Running	0	4m36s
cluster1-pxc-0	3/3	Running	0	6m17s
cluster1-pxc-1	3/3	Running	0	5m3s
cluster1-pxc-2	3/3	Running	0	3m56s
percona-xtradb-cluster-operator-79966668bd-rswbk	1/1	Running	0	9m54s

If the command output had shown some errors, you can examine the problematic Pod with the `kubectl describe <pod name>` command as follows:

```
$ kubectl describe pod cluster1-pxc-2
```

Review the detailed information for `Warning` statements and then correct the configuration. An example of a warning is as follows:

```
Warning FailedScheduling 68s (x4 over 2m22s) default-scheduler 0/1 nodes are available: 1 node(s) didn't match pod affinity/anti-affinity, 1 node(s) didn't satisfy existing pods anti-affinity rules.
```

# Install Percona XtraDB Cluster on Azure Kubernetes Service (AKS)

This guide shows you how to deploy Percona Operator for MySQL based on Percona XtraDB Cluster on Microsoft Azure Kubernetes Service (AKS). The document assumes some experience with the platform. For more information on the AKS, see the [Microsoft AKS official documentation](#).

## Prerequisites

The following tools are used in this guide and therefore should be preinstalled:

1. **Azure Command Line Interface (Azure CLI)** for interacting with the different parts of AKS. You can install it following the [official installation instructions for your system](#).
2. **kubectl** to manage and deploy applications on Kubernetes. Install it [following the official installation instructions](#).

Also, you need to sign in with Azure CLI using your credentials according to the [official guide](#).

## Create and configure the AKS cluster

To create your cluster, you will need the following data:

- name of your AKS cluster,
- an [Azure resource group](#), in which resources of your cluster will be deployed and managed.
- the amount of nodes you would like to have.

You can create your cluster via command line using `az aks create` command. The following command will create a 3-node cluster named `cluster1` within some [already existing](#) resource group named `my-resource-group`:

```
$ az aks create --resource-group my-resource-group --name cluster1 --enable-managed-identity --node-count 3 --node-vm-size Standard_B4ms --node-osdisk-size 30 --network-plugin kubenet --generate-ssh-keys --outbound-type loadbalancer
```

Other parameters in the above example specify that we are creating a cluster with machine type of [Standard\\_B4ms](#) and OS disk size reduced to 30 GiB. You can see detailed information about cluster creation options in the [AKS official documentation](#).

You may wait a few minutes for the cluster to be generated.

Now you should configure the command-line access to your newly created cluster to make `kubectl` be able to use it.

```
az aks get-credentials --resource-group my-resource-group --name cluster1
```

## Install the Operator and deploy your Percona XtraDB Cluster

1. Deploy the Operator. By default deployment will be done in the `default` namespace. If that's not the desired one, you can create a new namespace and/or set the context for the namespace as follows (replace the `<namespace name>` placeholder with some descriptive name):

```
$ kubectl create namespace <namespace name>
$ kubectl config set-context $(kubectl config current-context) --namespace=<namespace name>
```

At success, you will see the message that `namespace/<namespace name>` was created, and the context (`<cluster name>`) was modified.

Deploy the Operator using the following command:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/bundle.yaml
```

#### Expected output

```
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusters.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterbackups.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusterrestores.pxc.percona.com created
customresourcedefinition.apiextensions.k8s.io/perconaxtradbbackups.pxc.percona.com created
role.rbac.authorization.k8s.io/percona-xtradb-cluster-operator created
serviceaccount/percona-xtradb-cluster-operator created
rolebinding.rbac.authorization.k8s.io/service-account-percona-xtradb-cluster-operator created
deployment.apps/percona-xtradb-cluster-operator created
```

2. The operator has been started, and you can deploy Percona XtraDB Cluster:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr.yaml
```

#### Expected output

```
perconaxtradbcluster.pxc.percona.com/ cluster1 created
```

#### Note

This deploys default Percona XtraDB Cluster configuration with three HAProxy and three XtraDB Cluster instances. Please see [deploy/cr.yaml](#) and [Custom Resource Options](#) for the configuration options. You can clone the repository with all manifests and source code by executing the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

After editing the needed options, apply your modified `deploy/cr.yaml` file as follows:

```
$ kubectl apply -f deploy/cr.yaml
```

The creation process may take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

#### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

## Verifying the cluster operation

It may take ten minutes to get the cluster started. When `kubectl get pxc` command finally shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ kubectl get secrets
```

The Secrets object you are interested in has the `cluster1-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `cluster1-secrets`, if needed):

```
$ kubectl get secret cluster1-secrets -n <namespace> --template='{{.data.root | base64decode}}{\n}'
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

#### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```

#### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

## Troubleshooting

If `kubectl get pxc` command doesn't show `ready` status too long, you can check the creation process with the `kubectl get pods` command:

```
$ kubectl get pods
```

#### Expected output

NAME	READY	STATUS	RESTARTS	AGE
cluster1-haproxy-0	2/2	Running	0	6m17s
cluster1-haproxy-1	2/2	Running	0	4m59s
cluster1-haproxy-2	2/2	Running	0	4m36s
cluster1-pxc-0	3/3	Running	0	6m17s
cluster1-pxc-1	3/3	Running	0	5m3s
cluster1-pxc-2	3/3	Running	0	3m56s
percona-xtradb-cluster-operator-79966668bd-rswbk	1/1	Running	0	9m54s

If the command output had shown some errors, you can examine the problematic Pod with the `kubectl describe <pod name>` command as follows:

```
$ kubectl describe pod cluster1-pxc-2
```

Review the detailed information for `Warning` statements and then correct the configuration. An example of a warning is as follows:

```
Warning FailedScheduling 68s (x4 over 2m22s) default-scheduler 0/1 nodes are available: 1 node(s) didn't match pod affinity/anti-affinity, 1 node(s) didn't satisfy existing pods anti-affinity rules.
```

## Removing the AKS cluster

To delete your cluster, you will need the following data:

- name of your AKS cluster,
- AWS region in which you have deployed your cluster.

You can clean up the cluster with the `az aks delete` command as follows (with real names instead of `<resource group>` and `<cluster name>` placeholders):

```
$ az aks delete --name <cluster name> --resource-group <resource group> --yes --no-wait
```

It may take ten minutes to get the cluster actually deleted after executing this command.

 **Warning**

After deleting the cluster, all data stored in it will be lost!

# Install Percona XtraDB Cluster on OpenShift

Percona Operator for Percona XtrabDB Cluster is a [Red Hat Certified Operator](#). This means that Percona Operator is portable across hybrid clouds and fully supports the Red Hat OpenShift lifecycle.

Installing Percona XtraDB Cluster on OpenShift includes two steps:

- Installing the Percona Operator for MySQL,
- Install Percona XtraDB Cluster using the Operator.

## Install the Operator


You can install Percona Operator for MySQL on OpenShift using the web interface (the [Operator Lifecycle Manager](#)), or using the command line interface.

## Install the Operator via the Operator Lifecycle Manager (OLM)

Operator Lifecycle Manager (OLM) is a part of the [Operator Framework](#) that allows you to install, update, and manage the Operators lifecycle on the OpenShift platform.

Following steps will allow you to deploy the Operator and Percona XtraDB Cluster on your OLM installation:


1. Login to the OLM and click the needed Operator on the OperatorHub page:

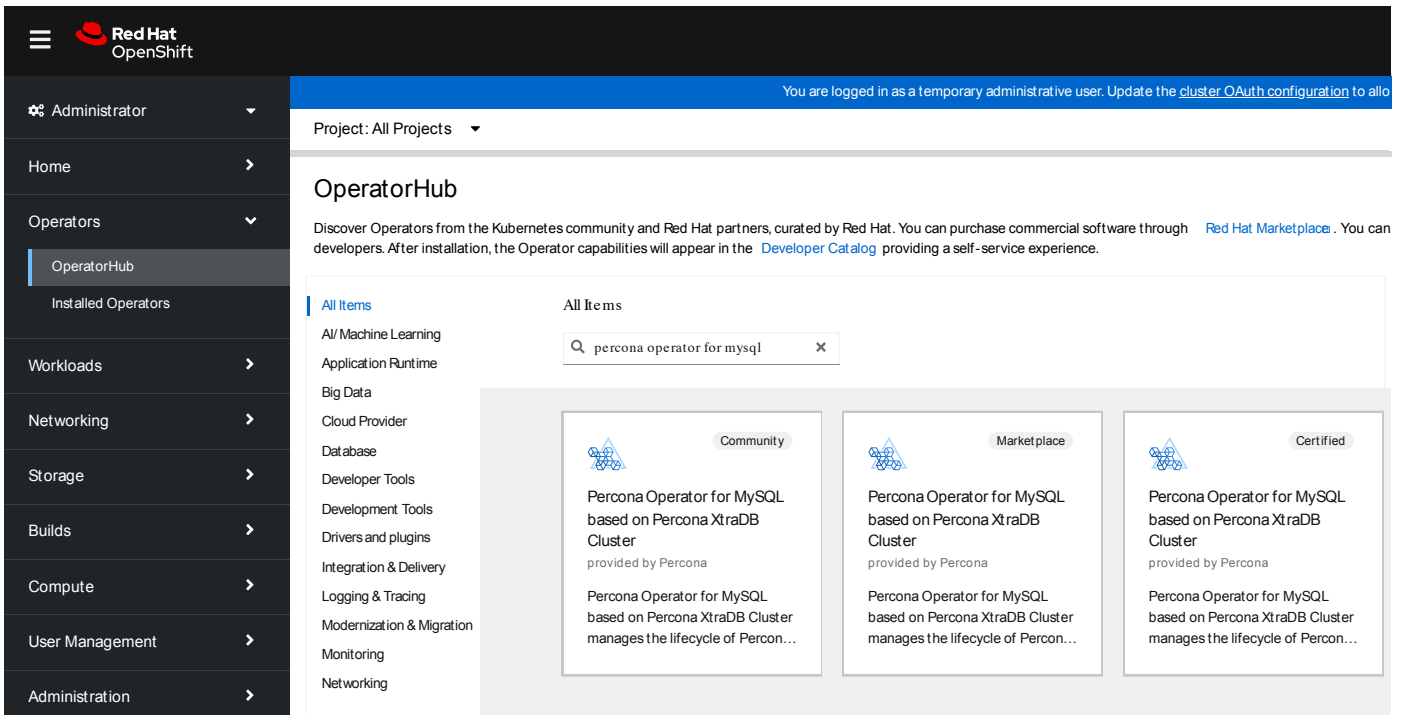

Then click "Continue", and "Install".

2. A new page will allow you to choose the Operator version and the Namespace / OpenShift project you would like to install the Operator into.



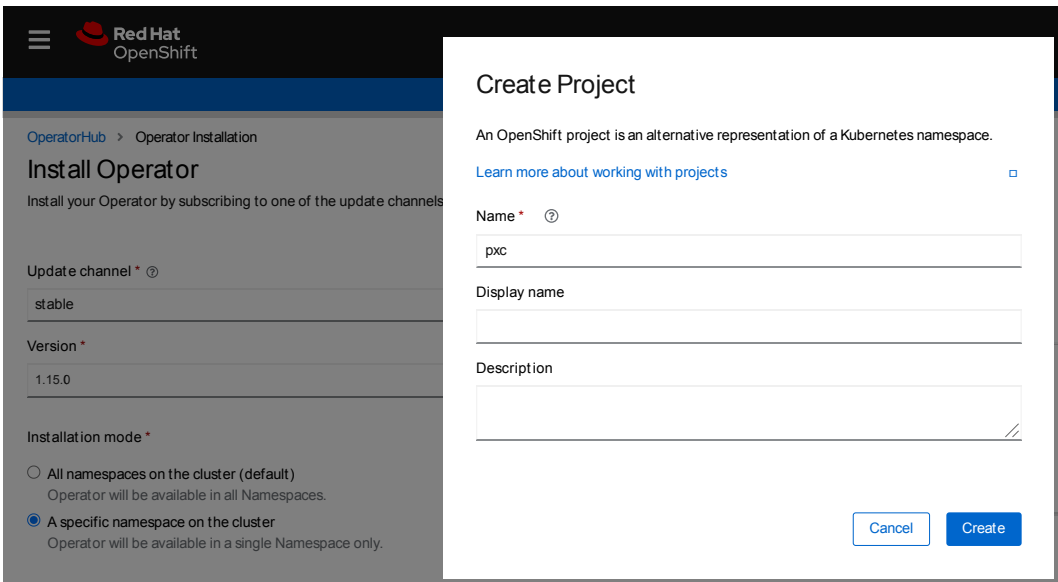

**Note**

To install the Operator in [multi-namespace \(cluster-wide\) mode](#), use the one from the certified catalog. It has the Certified label. Choose values with `-cw` suffix for the update channel and version, and select the "All namespaces on the cluster" radio button for the installation mode instead of choosing a specific Namespace:

Click "Install" to install the Operator.

- When the installation finishes, you can deploy Percona XtraDB Cluster. In the "Operator Details" you will see Provided APIs (Custom Resources, available for installation). Click "Create instance" for the `PerconaXtraDBCluster` Custom Resource.



Provided APIs

<p><b>PXDB PerconaXtraDBCluster</b></p> <p>Instance of a Percona XtraDB Cluster</p> <p><a href="#">Create instance</a></p>	<p><b>PXDB PerconaXtraDBClusterBackup</b></p> <p>Instance of a Percona XtraDB Cluster Backup</p> <p><a href="#">Create instance</a></p>	<p><b>PXDB PerconaXtraDBClusterRestore</b></p> <p>Instance of a Percona XtraDB Cluster Restore</p> <p><a href="#">Create instance</a></p>
--	---	---

You will be able to edit manifest to set needed Custom Resource options, and then click "Create" button to deploy your database cluster.

### Install the Operator via the command-line interface

1. Clone the percona-xtradb-cluster-operator repository:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
$ cd percona-xtradb-cluster-operator
```

**Note**

It is crucial to specify the right branch with the -b option while cloning the code on this step. Please be careful.

1. Now Custom Resource Definition for Percona XtraDB Cluster should be created from the `deploy/crd.yaml` file. Custom Resource Definition extends the standard set of resources which Kubernetes "knows" about with the new items (in our case ones which are the core of the operator).

This step should be done only once; it does not need to be repeated with the next Operator deployments, etc.

```
$ oc apply --server-side -f deploy/crd.yaml
```

**Note**

Setting Custom Resource Definition requires your user to have cluster-admin role privileges.

If you want to manage your Percona XtraDB Cluster with a non-privileged user, necessary permissions can be granted by applying the next clusterrole:

```
$ oc create clusterrole pxc-admin --verb="*" --
resource=perconaxtradbclusters.pxc.percona.com,perconaxtradbclusters.pxc.percona.com/status,perconaxtradbclusterbackups.pxc.percona.com,perconaxtradbclusterbackups.pxc.percona.com/status,perconaxtradbclusterrestores.pxc.percona.com,perconaxtradbclusterrestores.pxc.percona.com/status
$ oc adm policy add-cluster-role-to-user pxc-admin <some-user>
```

If you have a [cert-manager](#) installed, then you have to execute two more commands to be able to manage certificates with a non-privileged user:

```
$ oc create clusterrole cert-admin --verb="*" --resource=issuers.certmanager.k8s.io,certificates.certmanager.k8s.io
$ oc adm policy add-cluster-role-to-user cert-admin <some-user>
```

2. The next thing to do is to create a new `pxc` project:

```
$ oc new-project pxc
```

3. Now RBAC (role-based access control) for Percona XtraDB Cluster should be set up from the `deploy/rbac.yaml` file. Briefly speaking, role-based access is based on specifically defined roles and actions corresponding to them, allowed to be done on specific Kubernetes resources (details about users and roles can be found in [OpenShift documentation](#)).

```
$ oc apply -f deploy/rbac.yaml
```

Finally, it's time to start the operator within OpenShift:

```
$ oc apply -f deploy/operator.yaml
```

#### Note

You can simplify the Operator installation by applying a single `deploy/bundle.yaml` file instead of running commands from the steps 2 and 4:

```
$ oc apply --server-side -f deploy/bundle.yaml
```

This will automatically create Custom Resource Definition, set up role-based access control and install the Operator as one single action.

## Install Percona XtraDB Cluster

1. Now that's time to add the Percona XtraDB Cluster users [Secrets](#) with logins and passwords to Kubernetes. By default, the Operator generates users Secrets automatically, and *no actions are required at this step*.

Still, you can generate and apply your Secrets by your own. In this case, place logins and plaintext passwords for the user accounts in the data section of the `deploy/secrets.yaml` file; after editing is finished, create users Secrets with the following command:

```
$ oc create -f deploy/secrets.yaml
```

More details about secrets can be found in [Users](#).

2. Now certificates should be generated. By default, the Operator generates certificates automatically, and no actions are required at this step. Still, you can generate and apply your own certificates as secrets according to the [TLS instructions](#).
3. After the operator is started and user secrets are added, Percona XtraDB Cluster can be created at any time with the following command:

```
$ oc apply -f deploy/cr.yaml
```

The creation process may take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ oc get pxc
```

#### Expected output

NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

## Verify the cluster operation

It may take ten minutes to get the cluster started. When the `oc get pxc` command output shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ oc get secrets
```

The Secrets object you are interested in has the `cluster1-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `cluster1-secrets`, if needed):

```
$ oc get secret cluster1-secrets -n <namespace> --template='{{.data.root | base64decode}}{\n\n}'
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ oc run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

#### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```

#### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

# Install Percona XtraDB Cluster on Kubernetes

1. First of all, clone the percona-xtradb-cluster-operator repository:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
$ cd percona-xtradb-cluster-operator
```

## Note

It is crucial to specify the right branch with `-b` option while cloning the code on this step. Please be careful.

1. Now Custom Resource Definition for Percona XtraDB Cluster should be created from the `deploy/crd.yaml` file. Custom Resource Definition extends the standard set of resources which Kubernetes “knows” about with the new items (in our case ones which are the core of the operator).

This step should be done only once; it does not need to be repeated with the next Operator deployments, etc.

```
$ kubectl apply --server-side -f deploy/crd.yaml
```

2. The next thing to do is to add the `pxc` namespace to Kubernetes, not forgetting to set the correspondent context for further steps:

```
$ kubectl create namespace pxc
$ kubectl config set-context $(kubectl config current-context) --namespace=pxc
```

3. Now RBAC (role-based access control) for Percona XtraDB Cluster should be set up from the `deploy/rbac.yaml` file. Briefly speaking, role-based access is based on specifically defined roles and actions corresponding to them, allowed to be done on specific Kubernetes resources (details about users and roles can be found in [Kubernetes documentation](#)).

```
$ kubectl apply -f deploy/rbac.yaml
```

## Note

Setting RBAC requires your user to have cluster-admin role privileges. For example, those using Google Kubernetes Engine can grant user needed privileges with the following command:

```
$ kubectl create clusterrolebinding cluster-admin-binding --clusterrole=cluster-admin --user=$(gcloud config get-value core/account)
```

Finally it's time to start the operator within Kubernetes:

```
$ kubectl apply -f deploy/operator.yaml
```

## Note

You can simplify the Operator installation by applying a single `deploy/bundle.yaml` file instead of running commands from the steps 2 and 4:

```
$ kubectl apply --server-side -f deploy/bundle.yaml
```

This will automatically create Custom Resource Definition, set up role-based access control and install the Operator as one single action.

4. Now that's time to add the Percona XtraDB Cluster users [Secrets](#) with logins and passwords to Kubernetes. By default, the Operator generates users Secrets automatically, and *no actions are required at this step*.

Still, you can generate and apply your Secrets on your own. In this case, place logins and plaintext passwords for the user accounts in the data section of the `deploy/secrets.yaml` file; after editing is finished, create users Secrets with the following command:

```
$ kubectl create -f deploy/secrets.yaml
```

More details about secrets can be found in [Users](#).

5. Now certificates should be generated. By default, the Operator generates certificates automatically, and *no actions are required at this step*. Still, you can generate and apply your own certificates as secrets according to the [TLS instructions](#).

6. After the operator is started and user secrets are added, Percona XtraDB Cluster can be created at any time with the following command:

```
$ kubectl apply -f deploy/cr.yaml
```

Creation process will take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

Expected output						
NAME	ENDPOINT	STATUS	PXC	PROXYSQL	HAPROXY	AGE
cluster1	cluster1-haproxy.default	ready	3		3	5m51s

## Verify the cluster operation

It may take ten minutes to get the cluster started. When `kubectl get pxc` command finally shows you the cluster status as `ready`, you can try to connect to the cluster.

To connect to Percona XtraDB Cluster you will need the password for the root user. Passwords are stored in the Secrets object.

Here's how to get it:

1. List the Secrets objects.

```
$ kubectl get secrets
```

The Secrets object you are interested in has the `cluster1-secrets` name by default.

2. Use the following command to get the password of the `root` user. Substitute the `<namespace>` placeholder with your value (and use the different Secrets object name instead of the `cluster1-secrets`, if needed):

```
$ kubectl get secret cluster1-secrets -n <namespace> --template='{{.data.root | base64decode}}{"\n"}'
```

3. Run a container with `mysql` tool and connect its console output to your terminal. The following command does this, naming the new Pod `percona-client`:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

Executing it may require some time to deploy the corresponding Pod.

4. Now run the `mysql` tool in the `percona-client` command shell using the password obtained from the Secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```


### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

This command will connect you to the MySQL server.

# Set up Percona XtraDB Cluster cross-site replication

The cross-site replication involves configuring one Percona XtraDB Cluster as *Source*, and another Percona XtraDB Cluster as *Replica* to allow an asynchronous replication between them:

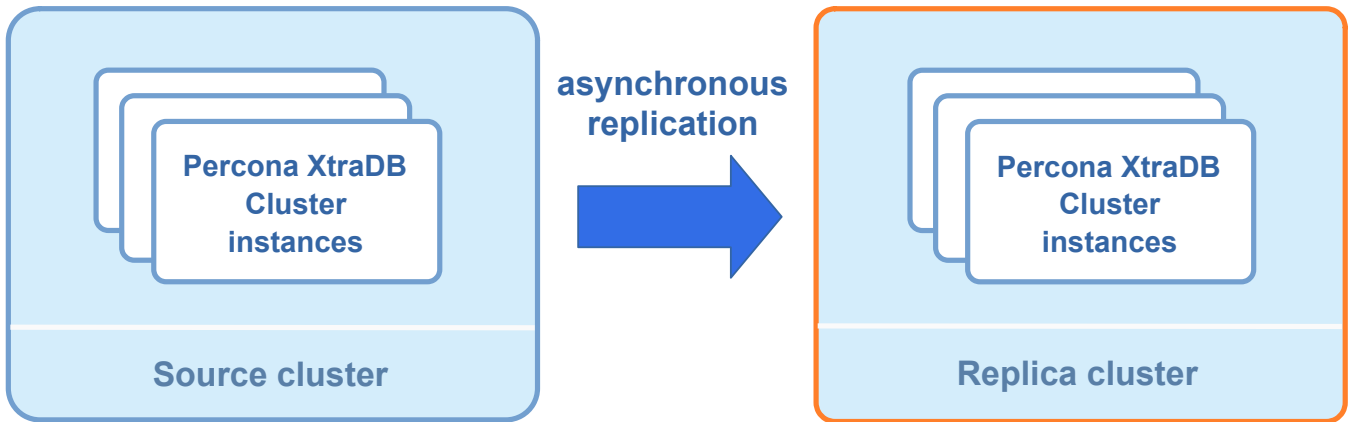

The Operator automates configuration of *Source* and *Replica* Percona XtraDB Clusters, but the feature itself is not bound to Kubernetes. Either *Source* or *Replica* can run outside of Kubernetes, be regular MySQL and be out of the Operators' control.

This feature can be useful in several cases: for example, it can simplify migration from on-premises to the cloud with replication, and it can be really helpful in case of the disaster recovery too.

## Note

Cross-site replication is based on [Automatic Asynchronous Replication Connection Failover](#). Therefore it requires MySQL 8.0.22+ (Percona XtraDB Cluster 8.0.22+) to work.

Setting up MySQL for asynchronous replication without the Operator is out of the scope for this document, but it is described [here](#) and is also covered by [this HowTo](#).

Configuring the cross-site replication for the cluster controlled by the Operator is explained in the following subsections.

## Creating a Replica cluster

Cross-site replication can be configured on two sibling Percona XtraDB Clusters. That's why you should first make a fully operational clone of your main database cluster. After that your original cluster will be configured as *Source*, and a new one (the clone) will be configured as *Replica*.

The easiest way to achieve this is to use backups. You make a full backup of your main database cluster, and restore it to a new Kubernetes-based environment, following [this HowTo](#).

## Configuring cross-site replication on Source instances

You can configure *Source* instances for cross-site replication with `spec.pxc.replicationChannels` subsection in the `deploy/cr.yaml` configuration file. It is an array of channels, and you should provide the following keys for the channel in your *Source* Percona XtraDB Cluster:

- `pxc.replicationChannels.[].name` key is the name of the channel,
- `pxc.replicationChannels.[].isSource` key should be set to `true`.

Here is an example:

```
spec:
  pxc:
    replicationChannels:
      - name: pxc1_to_pxc2
        isSource: true
```

You will also need to expose every Percona XtraDB Cluster Pod of the *Source* cluster to make it possible for the *Replica* cluster to connect. This is done through the `pxc.expose` section in the `deploy/cr.yaml` configuration file as follows.

```
spec:
  pxc:
    expose:
      enabled: true
      type: LoadBalancer
```

#### Note

This will create a LoadBalancer per each Percona XtraDB Cluster Pod. In most cases, for cross-region replication to work this Load Balancer should be internet-facing.

The cluster will be ready for asynchronous replication when you apply changes as usual:

```
$ kubectl apply -f deploy/cr.yaml
```

To list the endpoints assigned to PXC Pods list the Kubernetes Service objects by executing `kubectl get services -l "app.kubernetes.io/instance=cluster1"` command (don't forget to substitute `cluster1` with the real name of your cluster, if you don't use the default name).

## Configuring cross-site replication on Replica instances

You can configure *Replica* instances for cross-site replication with `spec.pxc.replicationChannels` subsection in the `deploy/cr.yaml` configuration file. It is an array of channels, and you should provide the following keys for the channel in your *Replica* Percona XtraDB Cluster:

- `spec.pxc.replicationChannels[].name` key is the name of the channel,
- `spec.pxc.replicationChannels[].isSource` key should be set to `false`,
- `spec.pxc.replicationChannels[].sourcesList` is the list of *Source* cluster names from which *Replica* should get the data,
- `spec.pxc.replicationChannels[].sourcesList[].host` is the host name or IP address of the *Source*,
- `spec.pxc.replicationChannels[].sourcesList[].port` is the port of the source (`3306` port will be used if nothing specified),
- `spec.pxc.replicationChannels[].sourcesList[].weight` is the *weight* of the source (in the event of a connection failure, a new source is selected from the list based on a weighted priority).

Here is the example:

```
spec:
  pxc:
    replicationChannels:
      - name: uspxc1_to_pxc2
        isSource: false
        sourcesList:
          - host: pxc1.source.percona.com
            port: 3306
            weight: 100
          - host: pxc2.source.percona.com
            weight: 100
          - host: pxc3.source.percona.com
            weight: 100
      - name: eu_to_pxc2
        isSource: false
        sourcesList:
          - host: pxc1.source.percona.com
            port: 3306
            weight: 100
          - host: pxc2.source.percona.com
            weight: 100
          - host: pxc3.source.percona.com
            weight: 100
```

The cluster will be ready for asynchronous replication when you apply changes as usual:



```
$ kubectl apply -f deploy/cr.yaml
```

#### Note

You can also configure SSL channel for replication [↗](#). Following options allow you using replication over an encrypted channel. Set the `replicationChannels.configuration.ssl` key to true, optionally enable host name identity verification with the `replicationChannels.configuration.sslSkipVerify` key, and set `replicationChannels.configuration.ca` key to the path name of the Certificate Authority (CA) certificate file:

```
replicationChannels:
- isSource: false
  name: uspxc1_to_pxc2
  configuration:
    ssl: true
    sslSkipVerify: true
    ca: '/etc/mysql/ssl/ca.crt'
  ...
```

SSL certificates on both sides should be signed by the same certificate authority for encrypted replication channels to work.

## System user for replication

Replication channel demands a special [system user](#) with same credentials on both *Source* and *Replica*.

The Operator creates a system-level Percona XtraDB Cluster user named `replication` for this purpose, with credentials stored in a Secret object [along with other system users](#).

#### Note

If the Replica cluster is not a clone of the original one (for example, it's outside of Kubernetes and is not under the Operator's control) [the appropriate user with necessary permissions](#) [↗](#) should be created manually.

If you need you can change a password for this user as follows:

#### in Linux

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"replication": "'$(echo -n new_password | base64 --wrap=0)'"}}'
```

#### in macOS

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"replication": "'$(echo -n new_password | base64)'"}}'
```

If you have changed the `replication` user's password on the Source cluster, and you use the Operator version 1.9.0, you can have a *replication is not running* error message in log, similar to the following one:

```
{"level":"info","ts":1629715578.2569592,"caller":"zapr/zapr.go 69","msg":"Replication for channel is not running. Please, check the replication status","channel":"pxc2_to_pxc1"}
```

Fixing this involves the following steps.

1. Find the Replica Pod which was chosen by the Operator for replication, using the following command:

```
$ kubectl get pods --selector percona.com/replicationPod=true
```

2. Get the shell access to this Pod and login to the MySQL monitor as a [root user](#):

```
$ kubectl exec -c pxc --stdin --tty <pod_name> -- /bin/bash
bash-4.4$ mysql -uroot -proot_password
```

3. Execute the following three SQL commands to propagate the `replication` user password from the Source cluster to Replica:

```
STOP REPLICA IO_THREAD FOR CHANNEL '$REPLICATION_CHANNEL_NAME';  
CHANGE MASTER TO MASTER_PASSWORD='$NEW_REPLICATION_PASSWORD' FOR CHANNEL '$REPLICATION_CHANNEL_NAME';  
START REPLICA IO_THREAD FOR CHANNEL '$REPLICATION_CHANNEL_NAME';
```

# Upgrade

# Update Percona Operator for MySQL based on Percona XtraDB Cluster

You can upgrade Percona Operator for MySQL based on Percona XtraDB Cluster to newer versions

The upgrade process consists of these steps:

- Upgrade the Operator
- Upgrade the database (Percona XtraDB Cluster).

## Update scenarios

You can either upgrade both the Operator and the database, or you can upgrade only the database. To decide which scenario to choose, read on.

### Full upgrade (CRD, Operator, and the database)

When to use this scenario:

- The new Operator version has changes that are required for new features of the database to work
- The Operator has new features or fixes that enhance automation and management.
- Compatibility improvements between the Operator and the database require synchronized updates.

When going on with this scenario, make sure to test it in a staging or testing environment first. Upgrading the Operator may cause performance degradation.

### Upgrade only the database

When to use this scenario:

- The new version of the database has new features or fixes that are not related to the Operator or other components of your infrastructure
- You have updated the Operator earlier and now want to proceed with the database update.

When choosing this scenario, consider the following:

- Check that the current Operator version supports the new database version.
- Some features may require an Operator upgrade later for full functionality.

## Update strategies

You can choose how you want to update your database cluster when you run an upgrade:

- *Smart Update* is the automated way to update the database cluster. The Operator controls how objects are updated. It restarts Pods in a specific order, with the primary instance updated last to avoid connection issues until the whole cluster is updated to the new settings.

This update method applies during database upgrades and when making changes like updating a ConfigMap, rotating passwords, or changing resource values. It is the default and recommended way to update.

- *Rolling Update* is initiated manually and [controlled by Kubernetes](#). The StatefulSet controller in Kubernetes deletes a Pod, updates it, waits till it reports the Ready status and proceeds to the next Pod. The order for Pod update is the same as for Pod termination. However, this order may not be optimal from the Percona Server for MongoDB point of view.
- *On Delete* strategy requires [a user to manually delete a Pod to make Kubernetes StatefulSet controller recreate it with the updated configuration](#).

To select an update strategy, set the `updateStrategy` key in the [Custom Resource](#) manifest to one of the following:

- `SmartUpdate`
- `RollingUpdate`
- `OnDelete`

For a manual update of your database cluster using the `RollingUpdate` or `OnDelete` strategies, refer to [the low-level Kubernetes way of database upgrades](#) guide.

## Update on OpenShift

If you run the Operator on [Red Hat Marketplace](#) or you run Red Hat certified Operators on [OpenShift](#), you need to do additional steps during the upgrade. See [this HOWTO](#) for details.

# Upgrade CRD and the Operator

## Upgrade the Operator and CRD

To update the Operator, you need to update the Custom Resource Definition (CRD) and the Operator deployment. Also we recommend to update the Kubernetes database cluster configuration by updating the Custom Resource and the database components to the latest version. This step ensures that all new features that come with the Operator release work in your environment.

The database cluster upgrade process is similar for all installation methods, including Helm and OLM.

## Considerations

1. The Operator version has three digits separated by a dot (.) in the format `major.minor.patch`. Here's how you can understand the version `1.16.1`:

- `1` is the major version
- `16` is the minor version
- `1` is the patch version.

You can only upgrade the Operator to the nearest `major.minor` version (for example, from `1.15.1` to `1.16.1`).

If the your current Operator version and the version you want to upgrade to differ by more than one minor version, you need to upgrade step by step. For example, if your current version is `1.14.x` and you want to move to `1.16.x`, first upgrade to `1.15.x`, then to `1.16.x`.

Patch versions don't influence the upgrade, so you can safely move from `1.15.1` to `1.16.1`.

Check the [Release notes index](#) for the list of the Operator versions.

2. CRD supports the **last 3 minor versions of the Operator**. This means it is compatible with the newest Operator version and the two older minor versions. If the Operator is older than the CRD *by no more than two versions*, you should be able to continue using the old Operator version. But updating the CRD and Operator is the **recommended path**.

3. Starting with version `1.12.0`, the Operator no longer has a separate API version for each release in CRD. Instead, the CRD has the API version `v1`. Therefore, if you installed the CRD when the Operator version was **older than 1.12.0**, you must update the API version in the CRD manually to run the upgrade. To check your CRD version, use the following command:

```
$ kubectl get crd perconaxtradclusters.pxc.percona.com -o yaml | yq .status.storedVersions
```

### Sample output

```
- v1-11-0  
- v1
```

If the CRD version is other than `v1` or has multiple entries, run the manual update.

4. The Operator versions `1.14.0` and `1.15.0` **should be excluded** from the incremental upgrades sequence in favor of [1.14.1](#) and [1.15.1](#) releases.

- The upgrade path from the version `1.14.1` should be `1.14.1 -> 1.15.1`.
- Direct upgrades from `1.13.0` to `1.14.1` and from `1.14.0` to `1.15.1` are supported.

5. To upgrade multiple [single-namespace Operator deployments](#) in one Kubernetes cluster, where each Operator controls a database cluster in its own namespace, do the following:

- upgrade the CRD (not 3 minor versions far from the oldest Operator installation in the Kubernetes cluster) first
- upgrade the Operators in each namespace incrementally to the latest minor version (e.g. from `1.15.1` to `1.16.1`, then to `1.17.0`)

## Upgrade manually

The upgrade includes the following steps.

1. **For Operators older than v1.12.0:** Update the API version in the [Custom Resource Definition](#) [↗](#):

## Manually

```
$ kubectl proxy & \
$ curl \
  --header "Content-Type: application/json-patch+json" \
  --request PATCH \
  --data '[{"op": "replace", "path": "/status/storedVersions", "value":["v1"]}]' \
  --url
"http://localhost:8001/apis/apiextensions.k8s.io/v1/customresourcedefinitions/perconaxtradbclusters.pxc.percona.com/status"
```

### Expected output

```
{
  {...},
  "status": {
    "storedVersions": [
      "v1"
    ]
  }
}
```

### Via kubectl patch

```
$ kubectl patch customresourcedefinitions perconaxtradbclusters.pxc.percona.com --subresource='status' --type='merge' -p '{"status":{"storedVersions":["v1"]}]'
```

### Expected output

```
customresourcedefinition.apiextensions.k8s.io/perconaxtradbclusters.pxc.percona.com patched
```

2. Update the Custom Resource Definition for the Operator and the Role-based access control. Take the latest versions from the official repository on GitHub with the following commands:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/crd.yaml
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/rbac.yaml
```

3. Next, update the Percona Server for MySQL Operator Deployment in Kubernetes by changing the container image of the Operator Pod to the latest version. Find the image name for the current Operator release [in the list of certified images](#). Then [apply a patch](#) to the Operator Deployment and specify the image name and version. Use the following command to update the Operator to the 1.17.0 version:

```
$ kubectl patch deployment percona-xtradb-cluster-operator \
-p '{"spec":{"template":{"spec":{"containers":[{"name":"percona-xtradb-cluster-operator","image":"percona/percona-xtradb-cluster-operator:1.17.0"}]}}}}'
```

For previous releases, please refer to the [old releases documentation archive](#).

4. The deployment rollout will be automatically triggered by the applied patch. The update process is successfully finished when all Pods have been restarted.

### Note

Labels set on the Operator Pod will not be updated during upgrade.

5. Update the Custom Resource, the database, backup, proxy and PMM Client image names with a newer version tag. This step ensures all new features and improvements of the latest release work well within your environment.

Find the image names [in the list of certified images](#).

Check your custom HAProxy configuration **before** the upgrade to be compatible with the one available with the Operator version you're upgrading to. Find the `haproxy-global.cfg` for the Operator version 1.17.0 [here](#). Adjust your configuration, if needed.

We recommend to update the PMM Server **before** the upgrade of PMM Client. If you haven't done it yet, exclude PMM Client from the list of images to update.

Since this is a working cluster, the way to update the Custom Resource is to [apply a patch](#) with the `kubectl patch pxc` command.

### With PMM Client

#### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

==== "For Percona XtraDB Cluster 5.7"

```
```.bash data-prompt="$"
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
````
```

### Without PMM Client

#### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

#### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

## Upgrade via Helm

If you have [installed the Operator using Helm](#), you can upgrade the Operator with the `helm upgrade` command.

1. Update the [Custom Resource Definition](#) for the Operator, taking it from the official repository on Github, and do the same for the Role-based access control:



```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/crd.yaml
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/rbac.yaml
```

2. Next, update the Operator deployment.

### With default parameters

If you installed the Operator with default parameters, the upgrade can be done as follows:

```
$ helm upgrade my-op percona/pxc-operator --version 1.17.0
```

### With customized parameters

If you installed the Operator with some [customized parameters](#), you should list these options in the upgrade command.

You can get the list of the used options in YAML format with the `helm get values my-op -a > my-values.yaml` command. Then pass this file directly to the upgrade command as follows:

```
$ helm upgrade my-op percona/pxc-operator --version 1.17.0 -f my-values.yaml
```

The `my-op` parameter in the above example is the name of a [release object](#) which which you have chosen for the Operator when installing its Helm chart.


## Upgrade via Operator Lifecycle Manager (OLM)

If you have [installed the Operator on the OpenShift platform using OLM](#), you can upgrade the Operator within it.

1. List installed Operators for your Namespace to see if there are upgradable items.

### Installed Operators

Installed Operators are represented by ClusterServiceVersions within this Namespace.

| Name   | Status  |
|--|---|
|  Percona Operator for MySQL based on Percona XtraDB Cluster<br>1.14.0 provided by Percona | <span>✔ Succeeded</span><br><a href="#">Upgrade available</a> |

2. Click the "Upgrade available" link to see upgrade details, then click "Preview InstallPlan" button, and finally "Approve" to upgrade the Operator.

# Upgrade Percona XtraDB cluster

You can decide how to run the database upgrades:

- [Automatically](#) - the Operator periodically checks for new versions of the database images and for valid image paths and automatically updates your deployment with the latest, recommended or a specific version of the database and other components included. To do so, the Operator queries a special *Version Service* server at scheduled times. If the current version should be upgraded, the Operator updates the Custom Resource to reflect the new image paths and sequentially deletes Pods, allowing StatefulSet to redeploy the cluster Pods with the new image.
- [Manually](#) - you manually update the Custom Resource and specify the desired version of the database. Then, depending on the configured [update strategy](#), either the Operator automatically updates the deployment to this version. Or you manually trigger the upgrade by deleting Pods.

The way to instruct the Operator how it should run the database upgrades is to set the `upgradeOptions.apply` Custom Resource option to one of the following:

- `Never` - the Operator never makes automatic upgrades. You must upgrade the Custom Resource and images manually.
- `Disabled` - the Operator doesn't not carry on upgrades automatically. You must upgrade the Custom Resource and images manually.
- `Recommended` - the Operator automatically updates the database and components to the version flagged as Recommended.
- `Latest` - the Operator automatically updates the database and components to the most recent available version
- `version` - specify the specific database version that you want to update to in the format `8.0.41-32.1`, `5.7.44-31.65`, etc.. The Operator updates the database to it automatically. Find available versions [in the list of certified images](#).

For previous versions, refer to the [old releases documentation archive](#) [↗](#)).

## Minor upgrade

# To a specific version

## Upgrading Percona XtraDB Cluster to a specific version

### Assumptions

For the procedures in this tutorial, we assume that you have set up the `Smart Update` strategy to update the objects in your database cluster.

Read more about the Smart Update strategy and other available ones in the [Upgrade strategies](#) section.

### Before you start

1. We recommend to [update PMM Server](#) **before** upgrading PMM Client.
2. If you are using [custom configuration for HAProxy](#), check the HAProxy configuration file provided by the Operator **before the upgrade**. Find the `haproxy-global.cfg` for the Operator version `{{ release }}` [here](#).

Make sure that your custom config is still compatible with the new variant, and make necessary additions, if needed.

### Procedure

To update Percona XtraDB Cluster to a specific version, do the following:

- 1 Check the version of the Operator you have in your Kubernetes environment. If you need to update it, refer to the [Operator upgrade guide](#).
- 2 Check the [Custom Resource](#) manifest configuration to be the following:

- `spec.updateStrategy` option is set to `SmartUpdate`
- `spec.upgradeOptions.apply` option is set to `Disabled` or `Never`.

```
...
spec:
  updateStrategy: SmartUpdate
  upgradeOptions:
    apply: Disabled
  ...
```

- 3 Check the current version of the Custom Resource and what versions of the database and cluster components are compatible with it. Use the following command:

```
$ curl https://check.percona.com/versions/v1/pxc-operator/1.17.0 | jq -r '.versions[].matrix'
```

You can also find this information in the [Versions compatibility](#) matrix.

- 4 Update the Custom Resource, the database, backup, proxy and PMM Client image names with a newer version tag. Find the image names [in the list of certified images](#).

We recommend to update the PMM Server **before** the upgrade of PMM Client. If you haven't done it yet, exclude PMM Client from the list of images to update.

Since this is a working cluster, the way to update the Custom Resource is to [apply a patch](#) with the `kubectl patch pxc` command.

## With PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

## Without PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

- 5 The deployment rollout will be automatically triggered by the applied patch. You can track the rollout process in real time with the `kubectl rollout status` command with the name of your cluster:

```
$ kubectl rollout status sts cluster1-pxc
```

# Automated minor upgrade to the latest / recommended version

## Assumptions

For the procedures in this tutorial, we assume that you have set up the `Smart Update` strategy to update the objects in your database cluster.

Read more about the Smart Update strategy and other available ones in the [Upgrade strategies](#) section.

## Before you start

1. We recommend to [update PMM Server](#) [↗](#) before upgrading PMM Client.
2. If you are using [custom configuration for HAProxy](#), check the HAProxy configuration file provided by the Operator **before the upgrade**. Find the `haproxy-global.cfg` for the Operator version `{{ release }}` [here](#) [↗](#).

Make sure that your custom config is still compatible with the new variant, and make necessary additions, if needed.

## Procedure

You can configure the Operator to automatically upgrade Percona Server for MongoDB to the latest available, the recommended or to a specific version of your choice.

[Learn more about automatic upgrades](#)

The steps are the following:

- 1 Check the version of the Operator you have in your Kubernetes environment. If you need to update it, refer to the [Operator upgrade guide](#).
- 2 Make sure that `spec.updateStrategy` option is set to `SmartUpdate`.
- 3 Change the `upgradeOptions.apply` option from `Disabled` to one of the following values:
  - `Recommended` - automatic upgrade will choose the most recent version of software flagged as "Recommended". For newly created clusters, the Operator will always select Percona XtraDB Cluster 8.0 instead of Percona XtraDB Cluster 5.7, regardless of the image path. For already existing clusters the Operator respects your choice of Percona XtraDB Cluster version (5.7 vs 8.0) and updates the selected version.
  - `8.0-recommended`, `5.7-recommended` - same as above, but preserves specific major Percona XtraDB Cluster version for newly provisioned clusters (e.g. 8.0 will not be automatically used instead of 5.7),
  - `Latest` - automatic upgrades will choose the most recent version of the software available
  - `8.0-latest`, `5.7-latest` - same as above, but preserves specific major Percona XtraDB Cluster version for newly provisioned clusters (e.g. 8.0 will not be automatically used instead of 5.7),
  - `version number` - specify the desired version explicitly (version numbers are specified as `8.0.41-32.1`, `5.7.44-31.65`, etc.). Actual versions can be found [in the list of certified images](#). For older releases, please refer to the [old releases documentation archive](#) [↗](#).
- 4 Make sure to set the valid Version Server URL for the `versionServiceEndpoint` key. The Operator checks the new software versions in the Version Server. If the Operator can't reach the Version Server, the upgrades won't happen.

### Percona's Version Service (default)

You can use the URL of the official Percona's Version Service (default). Set `upgradeOptions.versionServiceEndpoint` to `https://check.percona.com`.

#### Version Service inside your cluster

Alternatively, you can run Version Service inside your cluster. This can be done with the `kubectl` command as follows:

```
$ kubectl run version-service --image=perconalab/version-service --env="SERVE_HTTP=true" --port 11000 --expose
```

- 5 Specify the schedule to check for the new versions in in CRON format for the `upgradeOptions.schedule` option.

The following example sets the midnight update checks with the official Percona's Version Service:

```
spec:
  updateStrategy: SmartUpdate
  upgradeOptions:
    apply: Recommended
    versionServiceEndpoint: https://check.percona.com
    schedule: "0 0 * * *"
  ...
```

#### Note

You can force an immediate upgrade by changing the schedule to `* * * * *` (continuously check and upgrade) and changing it back to another more conservative schedule when the upgrade is complete.

- 6 Apply your changes to the Custom Resource:

```
$ kubectl apply -f deploy/cr.yaml
```

# How to carry on low-level manual upgrades of Percona XtraDB Cluster

The default and recommended way to upgrade the database cluster is using the Smart Update strategy. The Operator controls how objects are updated and restarts the Pods in a proper order during the database upgrade or for other events that require the cluster update. To these events belong ConfigMap updates, password rotation or changing resource values.

In some cases running an automatic upgrade of Percona XtraDB Cluster is not an option. For example, if the database upgrade impacts your application, you may want to have a full control over the upgrade process.

Running a manual database upgrade allows you to do just that. You can use one of the following *upgrade strategies*:

- *Rolling Update*, initiated manually and [controlled by Kubernetes](#). Note that the order of Pods restart may not be optimal from the Percona Server for MongoDB point of view.
- *On Delete*, [done by Kubernetes on per-Pod basis](#) when Pods are manually deleted.

## Before you start

1. We recommend to [update PMM Server](#) **before** upgrading PMM Client.
2. If you are using [custom configuration for HAProxy](#), check the HAProxy configuration file provided by the Operator **before the upgrade**. Find the `haproxy-global.cfg` for the Operator version 1.17.0 [here](#).

Make sure that your custom config is still compatible with the new variant, and make necessary additions, if needed.

## Rolling Update strategy and semi-automatic updates

To run a semi-automatic update of Percona XtraDB Cluster, do the following:

- 1 Check the version of the Operator you have in your Kubernetes environment. If you need to update it, refer to the [Operator upgrade guide](#).
- 2 Edit the `deploy/cr.yaml` file and set the `updateStrategy` key to `RollingUpdate`.
- 3 Check the current version of the Custom Resource and what versions of the database and cluster components are compatible with it. Use the following command:

```
$ curl https://check.percona.com/versions/v1/pxc-operator/1.17.0 | jq -r '.versions[].matrix'
```

You can also find this information in the [Versions compatibility](#) matrix.

- 4 Update the Custom Resource, the database, backup, proxy and PMM Client image names with a newer version tag. Find the image names [in the list of certified images](#).

We recommend to update the PMM Server **before** the upgrade of PMM Client. If you haven't done it yet, exclude PMM Client from the list of images to update.

Since this is a working cluster, the way to update the Custom Resource is to [apply a patch](#) with the `kubectl patch pxc` command.



## With PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

## Without PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

- 5 After you applied the patch, the deployment rollout will be triggered automatically. You can track the rollout process in real time using the `kubectl rollout status` command with the name of your cluster:

```
$ kubectl rollout status sts cluster1-pxc
```

## Manual upgrade (the On Delete strategy)

To update Percona XtraDB Cluster manually, do the following:

- 1 Check the version of the Operator you have in your Kubernetes environment. If you need to update it, refer to the [Operator upgrade guide](#).

- 2 Edit the `deploy/cr.yaml` file and set the `updateStrategy` key to `OnDelete`.
- 3 Check the current version of the Custom Resource and what versions of the database and cluster components are compatible with it. Use the following command:

```
$ curl https://check.percona.com/versions/v1/pxc-operator/1.17.0 | jq -r '.versions[].matrix'
```

You can also find this information in the [Versions compatibility](#) matrix.

- 4 Update the Custom Resource, the database, backup, proxy and PMM Client image names with a newer version tag. Find the image names [in the list of certified images](#).

We recommend to update the PMM Server **before** the upgrade of PMM Client. If you haven't done it yet, exclude PMM Client from the list of images to update.

Since this is a working cluster, the way to update the Custom Resource is to [apply a patch](#) with the `kubectl patch pxc` command.

## With PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "percona/pmm-client:2.44.0" }
  }
}'
```

## Without PMM Client

### For Percona XtraDB Cluster 8.0

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:8.0.41-32.1" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35-32" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

### For Percona XtraDB Cluster 5.7

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "pxc": { "image": "percona/percona-xtradb-cluster:5.7.44-31.65" },
    "proxysql": { "image": "percona/proxysql2:2.7.1-1" },
    "haproxy": { "image": "percona/haproxy:2.8.14" },
    "backup": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

- 5 The Pod with the newer Percona XtraDB Cluster image will start after you delete it. Delete targeted Pods manually one by one to make them restart in desired order:

- 1 Delete the Pod using its name with the command like the following one:

```
$ kubectl delete pod cluster1-pxc-2
```

- 2 Wait until Pod becomes ready:

```
$ kubectl get pod cluster1-pxc-2
```

The output should be like this:

| NAME           | READY | STATUS  | RESTARTS | AGE   |
|----------------|-------|---------|----------|-------|
| cluster1-pxc-2 | 1/1   | Running | 0        | 3m33s |

The update process is successfully finished when all Pods have been restarted.

## Upgrade Database and Operator on OpenShift

Upgrading database and Operator on [Red Hat Marketplace](#) or to upgrade Red Hat certified Operators on [OpenShift](#) generally follows the [standard upgrade scenario](#), but includes a number of special steps specific for these platforms.

### Upgrading the Operator and CRD

## Operator 1.13.0 and older

1. First of all you need to manually update `initImage` Custom Resource option with the value of an alternative initial Operator installation image. You need doing this for all database clusters managed by the Operator. Without this step the cluster will go into error state after the Operator upgrade.

a. Find the initial Operator installation image with `kubectl get deploy` command:

```
$ kubectl get deploy percona-xtradb-cluster-operator -o yaml
```

### Expected output

```
...
"initContainer" : {
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:4edb5a53230e023bbe54c8e9e1154579668423fc3466415d5b04b8304a8e01d7"
},
...
```

b. [Apply a patch](#) to update the `initImage` option of your cluster Custom Resource with this value. Supposing that your cluster name is `cluster1`, the command should look as follows:


```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "initImage": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:4edb5a53230e023bbe54c8e9e1154579668423fc3466415d5b04b8304a8e01d7"
  }
}'
```

2. Now you can actually update the Operator via the [Operator Lifecycle Manager \(OLM\)](#) web interface.

Login to your OLM installation and list installed Operators for your Namespace to see if there are upgradable items:

## Installed Operators

Installed Operators are represented by ClusterServiceVersions within this Namespace.

| Name   | Status   |
|--|--|
|  Percona Operator for MySQL based on Percona XtraDB Cluster<br>1.14.0 provided by Percona | <span>✔ Succeeded</span><br><span>↻ Upgrade available</span> |

Click the "Upgrade available" link to see upgrade details, then click "Preview InstallPlan" button, and finally "Approve" to upgrade the Operator.

## Operator 1.14.0

1. First of all you need to manually update `initContainer.image` Custom Resource option with the value of an alternative initial Operator installation image. You need doing this for all database clusters managed by the Operator. Without this step the cluster will go into error state after the Operator upgrade.

a. Find the initial Operator installation image with `kubectl get deploy` command:

```
$ kubectl get deploy percona-xtradb-cluster-operator -o yaml
```

```

Expected output
...
"initContainer" : {
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:4edb5a53230e023bbe54c8e9e1154579668423fc3466415d5b04b8304a8e01d7"
},
...

```

b. [Apply a patch](#) to update the `initContainer.image` option of your cluster Custom Resource with this value. Supposing that your cluster name is `cluster1`, the command should look as follows:

```

$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "initContainer": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:4edb5a53230e023bbe54c8e9e1154579668423fc3466415d5b04b8304a8e01d7" }
  }
}'


```

2. Now you can actually update the Operator via the [Operator Lifecycle Manager \(OLM\)](#) web interface.

Login to your OLM installation and list installed Operators for your Namespace to see if there are upgradable items:

### Installed Operators

Installed Operators are represented by ClusterServiceVersions within this Namespace.

| Name  | Status  |
|---|---|
|  <b>Percona Operator for MySQL</b><br>based on Percona XtraDB Cluster<br>1.14.0 provided by Percona | <span style="color: green;">✔</span> Succeeded<br><span style="color: blue;">↕</span> Upgrade available |

Click the “Upgrade available” link to see upgrade details, then click “Preview InstallPlan” button, and finally “Approve” to upgrade the Operator.


### Operator 1.15.0 and newer

You can actually update the Operator via the [Operator Lifecycle Manager \(OLM\)](#) web interface.

Login to your OLM installation and list installed Operators for your Namespace to see if there are upgradable items:

### Installed Operators

Installed Operators are represented by ClusterServiceVersions within this Namespace.

| Name   | Status  |
|--|---|
|  <b>Percona Operator for MySQL</b><br>based on Percona XtraDB Cluster<br>1.14.0 provided by Percona | <span style="color: green;">✔</span> Succeeded<br><span style="color: blue;">↕</span> Upgrade available |

Click the “Upgrade available” link to see upgrade details, then click “Preview InstallPlan” button, and finally “Approve” to upgrade the Operator.

## Upgrading Percona XtraDB Cluster

1. Make sure that `spec.updateStrategy` option in the [Custom Resource](#) is set to `SmartUpdate`, `spec.upgradeOptions.apply` option is set to `Never` or `Disabled` (this means that the Operator will not carry on upgrades automatically).

```
...
spec:
  updateStrategy: SmartUpdate
  upgradeOptions:
    apply: Disabled
  ...
```

2. Find the **new** initial Operator installation image name (it had changed during the Operator upgrade) and other image names for the components of your cluster with the `kubectl get deploy` command:

```
$ kubectl get deploy percona-xtradb-cluster-operator -o yaml
```

#### Expected output

```
...
"initContainer" : {
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:e8c0237ace948653d8f3e297ec67276f23f4f7fb4f8018f97f246b65604d49e6"
},
...
"pxc": {
  "size": 3,
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:b526b83865ca26808aa1ef96f64319f65deba94b76c5b5b6aa181981ebd4282f",
  ...
"haproxy": {
  "enabled": true,
  "size": 3,
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:cbd4f1791941765eb6732f2dc88bad29bf23469898bd30f02d22a95c0f2aab9b",
  ...
"proxysql": {
  "enabled": false,
  "size": 3,
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:24f6d959efcf2083addf42f3b816220654133dc8a5a8a989ffd4cafffe122e19c",
  ...
"logcollector": {
  "enabled": true,
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:cb6ccda7839b3205ffaf5cb8016d1f91ed3be4438334d2122beb38791a32c015",
  ...
"pmm": {
  "enabled": false,
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:165f97cd4e2b6def546b0df7f50d88d83c150578bdb9c992953ed866615016f1",
  ...
"backup": {
  "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:483acaa57378ee5529479dbcabb3b8002751c1c43edd5553b52f001f323d4723",
  ...
```

3. [Apply a patch](#) to set the necessary `crVersion` value (equal to the Operator version) and update images in your cluster Custom Resource. Supposing that your cluster name is `cluster1`, the command should look as follows:



## Operator 1.13.0 or older

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.13.0",
    "initImage": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator@sha256:e8c0237ace948653d8f3e297ec67276f23f4f7fb4f8018f97f246b65604d49e6",
    "pxc": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:b526b83865ca26808aa1ef96f64319f65deba94b76c5b5b6aa181981ebd4282f" },
    "proxysql": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:24f6d959efcf2083addf42f3b816220654133dc8a5a8a989ffd4cafffe122e19c" },
    "haproxy": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:cbd4f1791941765eb6732f2dc88bad29bf23469898bd30f02d22a95c0f2aab9b" },
    "backup": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:483acaa57378ee5529479dbcabb3b8002751c1c43edd5553b52f001f323d4723" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:165f97cdae2b6def546b0df7f50d88d83c150578bdb9c992953ed866615016f1" }
  }
}'
```

## Operator 1.14.0 or newer

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "initContainer": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator@sha256:e8c0237ace948653d8f3e297ec67276f23f4f7fb4f8018f97f246b65604d49e6" },
    "pxc": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:b526b83865ca26808aa1ef96f64319f65deba94b76c5b5b6aa181981ebd4282f" },
    "proxysql": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:24f6d959efcf2083addf42f3b816220654133dc8a5a8a989ffd4cafffe122e19c" },
    "haproxy": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:cbd4f1791941765eb6732f2dc88bad29bf23469898bd30f02d22a95c0f2aab9b" },
    "backup": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:483acaa57378ee5529479dbcabb3b8002751c1c43edd5553b52f001f323d4723" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" },
    "pmm": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-containers@sha256:165f97cdae2b6def546b0df7f50d88d83c150578bdb9c992953ed866615016f1" }
  }
}'
```

#### Warning

The above command upgrades various components of the cluster including PMM Client. If you didn't follow the [official recommendation](#) to upgrade PMM Server before upgrading PMM Client, you can avoid PMM Client upgrade by removing it from the list of images as follows:

#### Operator 1.13.0 or older

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.13.0",
    "initImage": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:e8c0237ace948653d8f3e297ec67276f23f4f7fb4f8018f97f246b65604d49e6",
    "pxc": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:b526b83865ca26808aa1ef96f64319f65deba94b76c5b5b6aa181981ebd4282f" },
    "proxysql": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:24f6d959efcf2083addf42f3b816220654133dc8a5a8a989ffd4caffe122e19c" },
    "haproxy": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:cbd4f1791941765eb6732f2dc88bad29bf23469898bd30f02d22a95c0f2aab9b" },
    "backup": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:483acaa57378ee5529479dbcabb3b8002751c1c43edd5553b52f001f323d4723" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

#### Operator 1.14.0 or newer

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "crVersion": "1.17.0",
    "initContainer": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-
operator@sha256:e8c0237ace948653d8f3e297ec67276f23f4f7fb4f8018f97f246b65604d49e6" },
    "pxc": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:b526b83865ca26808aa1ef96f64319f65deba94b76c5b5b6aa181981ebd4282f" },
    "proxysql": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:24f6d959efcf2083addf42f3b816220654133dc8a5a8a989ffd4caffe122e19c" },
    "haproxy": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:cbd4f1791941765eb6732f2dc88bad29bf23469898bd30f02d22a95c0f2aab9b" },
    "backup": { "image": "registry.connect.redhat.com/percona/percona-xtradb-cluster-operator-
containers@sha256:483acaa57378ee5529479dbcabb3b8002751c1c43edd5553b52f001f323d4723" },
    "logcollector": { "image": "percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0" }
  }
}'
```

4. The deployment rollout will be automatically triggered by the applied patch. You can track the rollout process in real time with the `kubectl rollout status` command with the name of your cluster:

```
$ kubectl rollout status sts cluster1-pxc
```

# Configuration

# Users

MySQL user accounts within the Cluster can be divided into two different groups:

- *application-level users*: the unprivileged user accounts,
- *system-level users*: the accounts needed to automate the cluster deployment and management tasks, such as Percona XtraDB Cluster Health checks or ProxySQL integration.

As these two groups of user accounts serve different purposes, they are considered separately in the following sections.

## Unprivileged users

The Operator does not create unprivileged (general purpose) user accounts by default. There are two ways to create general purpose users:

- manual creation of custom MySQL users,
- automated users creation via Custom Resource (Operator versions 1.16.0 and newer).

### Create users in the Custom Resource

Starting from the Operator version 1.16.0 declarative creation of custom MySQL users is supported via the `users` subsection in the Custom Resource.

#### Warning

Declarative user management has technical preview status and is not yet recommended for production environments.

You can change `users` section in the `deploy/cr.yaml` configuration file at the cluster creation time, and adjust it over time. You can specify a new user in `deploy/cr.yaml` configuration file, setting the user's login name, hosts this user is allowed to connect from, accessible databases, a reference to a key in some Secret resource that contains user's password, as well as MySQL privilege grants for this user. You can find detailed description of the corresponding options in the [Custom Resource reference](#), and here is a self-explanatory example:

```
...
users:
- name: my-user
  dbs:
  - db1
  - db2
  hosts:
  - localhost
  grants:
  - SELECT
  - DELETE
  - INSERT
  withGrantOption: true
  passwordSecretRef:
    name: my-user-pwd
    key: my-user-pwd-key
...
```

The Secret mentioned in the `users.passwordSecretRef.name` option should look as follows:

```
apiVersion: v1
kind: Secret
metadata:
  name: my-user-pwd
type: Opaque
stringData:
  password: my-user-pwd-key
```

The Operator tracks password changes in the Secret object, and updates the user password in the database, when needed. The following specifics should be taken into account:

- When a user sets an invalid grant or sets an administrative (global) grant with some value present in `spec.user.dbs`, the Operator logs error and creates the user with the default grants (`GRANT USAGE`).

- The Operator doesn't delete users if they are removed from Custom Resource, to avoid affecting any pre-existing users.
- Not deleting users can bring a number of consequences. For example, when the host is updated in the `users.hosts` array (for example, `host1` changed to `host2`), a new user `user@host2` is created in addition to already existing `user@host1`. Moreover, if the password was updated in the secret for `user@host2`, and later the host in the Custom Resource was changed back to `host1`, the `user@host1` user will continue using the old password different from what the Custom Resource contains.
- The Operator updates grants specified for the user in additive manner: it adds new grants but doesn't revoke existing ones.
- It is not possible to add two entries for the same user (e.g. with different grants for different databases), but sequential updates of the Custom Resource can achieve the same effect.

The only necessary field to create new user is `users.name`, everything else can be generated by the Operator. For example, if the Secret object was not specified, user password will be generated and stored in a generated secret named `<cluster-name>-<custom-user-name>-secret`. Similarly, omitting `grants` and/or `db`s will result in default grants provided by MySQL.

## Create users manually

You can create unprivileged users manually. Supposing your cluster name is `cluster1`, the command should look as follows (don't forget to substitute `root_password` with the real root password):

```
$ kubectl run -it --rm percona-client --image=percona:8.0 --restart=Never -- mysql -hcluster1-pxc -uroot -proot_password
mysql> GRANT ALL PRIVILEGES ON database1.* TO 'user1'@'%' IDENTIFIED BY 'password1';
```

### Note

MySQL password for the user you create should not exceed 32 characters due to the [replication-specific limit introduced in MySQL 5.7.5](#).

Verify that the user was created successfully. If successful, the following command will let you successfully login to MySQL shell via ProxySQL:

```
$ kubectl run -it --rm percona-client --image=percona:8.0 --restart=Never -- bash -il
percona-client:/$ mysql -h cluster1-proxysql -uuser1 -ppassword1
mysql> SELECT * FROM database1.table1 LIMIT 1;
```

You may also try executing any simple SQL statement to ensure the permissions have been successfully granted.

## System Users

To automate the deployment and management of the cluster components, the Operator requires system-level Percona XtraDB Cluster users.

Credentials for these users are stored as a [Kubernetes Secrets](#) object. The Operator requires Kubernetes Secrets before Percona XtraDB Cluster is started. It will either use existing Secrets or create a new Secrets object with randomly generated passwords if it didn't exist. The name of the required Secret (`cluster1-secrets` by default) should be set in the `spec.secretsName` option of the `deploy/cr.yaml` configuration file.

### Note

In addition to `cluster1-secrets`, the Operator will also create an internal Secrets object named `internal-cluster1`, which exists for technical purposes and should not be edited by end users.

The following table shows system users' names and purposes.

### Warning

These users should not be used to run an application.

| User Purpose | Username | Password Secret Key | Description  |
|--------------|----------|---------------------|--|
| Admin        | root     | root                | Database administrative user, can be used by the application if needed |

| User Purpose        | Username   | Password Secret Key | Description  |
|---------------------|--|---------------------|--|
| ProxySQLAdmin       | proxyadmin   | proxyadmin          | ProxySQL administrative user, can be used to <a href="#">add general-purpose ProxySQL users</a>  |
| Backup              | xtrabackup   | xtrabackup          | The <a href="#">user to run backups</a> , granted <code>all</code> privileges for the <a href="#">point-in-time recovery</a> needs   |
| Monitoring          | monitor  | monitor             | User for internal monitoring purposes like liveness/readiness checks and <a href="#">PMM agent</a>   |
| PMM Server Password | should be set through the <a href="#">operator options</a> | pmmserver           | <a href="#">Password used to access PMM Server</a> . <b>Password-based authorization method is deprecated since the Operator 1.11.0. Use token-based authorization instead</b> |
| Operator Admin      | operator   | operator            | Database administrative user, should be used only by the Operator  |
| Replication         | replication  | replication         | Administrative user needed for <a href="#">cross-site Percona XtraDB Cluster</a>   |

#### Note

The administrative database user `operator` is created in MySQL as `operator@%`. Configurations with `operator@'something'` user having the host part different from `%` are not supported, and such users should not exist in the database.

## YAML Object Format

The default name of the Secrets object for these users is `cluster1-secrets` and can be set in the CR for your cluster in `spec.secretName` to something different. When you create the object yourself, it should match the following simple format:

```
apiVersion: v1
kind: Secret
metadata:
  name: cluster1-secrets
type: Opaque
stringData:
  root: root_password
  xtrabackup: backup_password
  monitor: monitor
  proxyadmin: admin_password
  operator: operatoradmin
  replication: repl_password
```

The example above matches what is shipped in `deploy/secrets.yaml` which contains default passwords. You should NOT use these in production, but they are present to assist in automated testing or simple use in a development environment.

As you can see, because we use the `stringData` type when creating the Secrets object, all values for each key/value pair are stated in plain text format convenient from the user's point of view. But the resulting Secrets object contains passwords stored as `data` - i.e., base64-encoded strings. If you want to update any field, you'll need to encode the value into base64 format. To do this, you can run `echo -n "password" | base64 --wrap=0` (or just `echo -n "password" | base64` in case of Apple macOS) in your local shell to get valid values. For example, setting the Admin user's password to `new_password` in the `cluster1-secrets` object can be done with the following command:

#### in Linux

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"root": "'$(echo -n new_password | base64 --wrap=0)'"}}'
```

#### in macOS

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"root": "'$(echo -n new_password | base64)'"}}'
```

## Password Rotation Policies and Timing


When there is a change in user secrets, the Operator creates the necessary transaction to change passwords. This rotation happens almost instantly (the delay can be up to a few seconds), and it's not needed to take any action beyond changing the password.

 **Note**

Please don't change `secretName` option in CR, make changes inside the secrets object itself.

Starting from the Operator version 1.13.0 system users are created with the `PASSWORD EXPIRE NEVER` policy. Also, same policy is automatically applied to system users on existing clusters when the Operator is upgraded to 1.13.0.

## Marking System Users In MySQL

Starting with MySQL 8.0.16, a new feature called Account Categories has been implemented, which allows us to mark our system users as such. See [the official documentation on this feature](#)  for more details.

## Development Mode

To make development and testing easier, `deploy/secrets.yaml` secrets file contains default passwords for Percona XtraDB Cluster system users.

These development mode credentials from `deploy/secrets.yaml` are:

| Secret Key  | Secret Value                 |
|-------------|------------------------------|
| root        | <code>root_password</code>   |
| xtrabackup  | <code>backup_password</code> |
| monitor     | <code>monitory</code>        |
| proxyadmin  | <code>admin_password</code>  |
| operator    | <code>operatoradmin</code>   |
| replication | <code>repl_password</code>   |

 **Warning**

Do not use the default Percona XtraDB Cluster user passwords in production!


# Exposing cluster

Percona Operator for MySQL based on Percona XtraDB Cluster provides entry points for accessing the database by client applications in several scenarios. In either way the cluster is exposed with regular Kubernetes [Service objects](#), configured by the Operator.

This document describes the usage of [Custom Resource manifest options](#) to expose the clusters deployed with the Operator.

## Exposing cluster with HAProxy or ProxySQL

The Operator provides a choice of two cluster components to provide load balancing and proxy service: you can use either [HAProxy](#) or [ProxySQL](#).

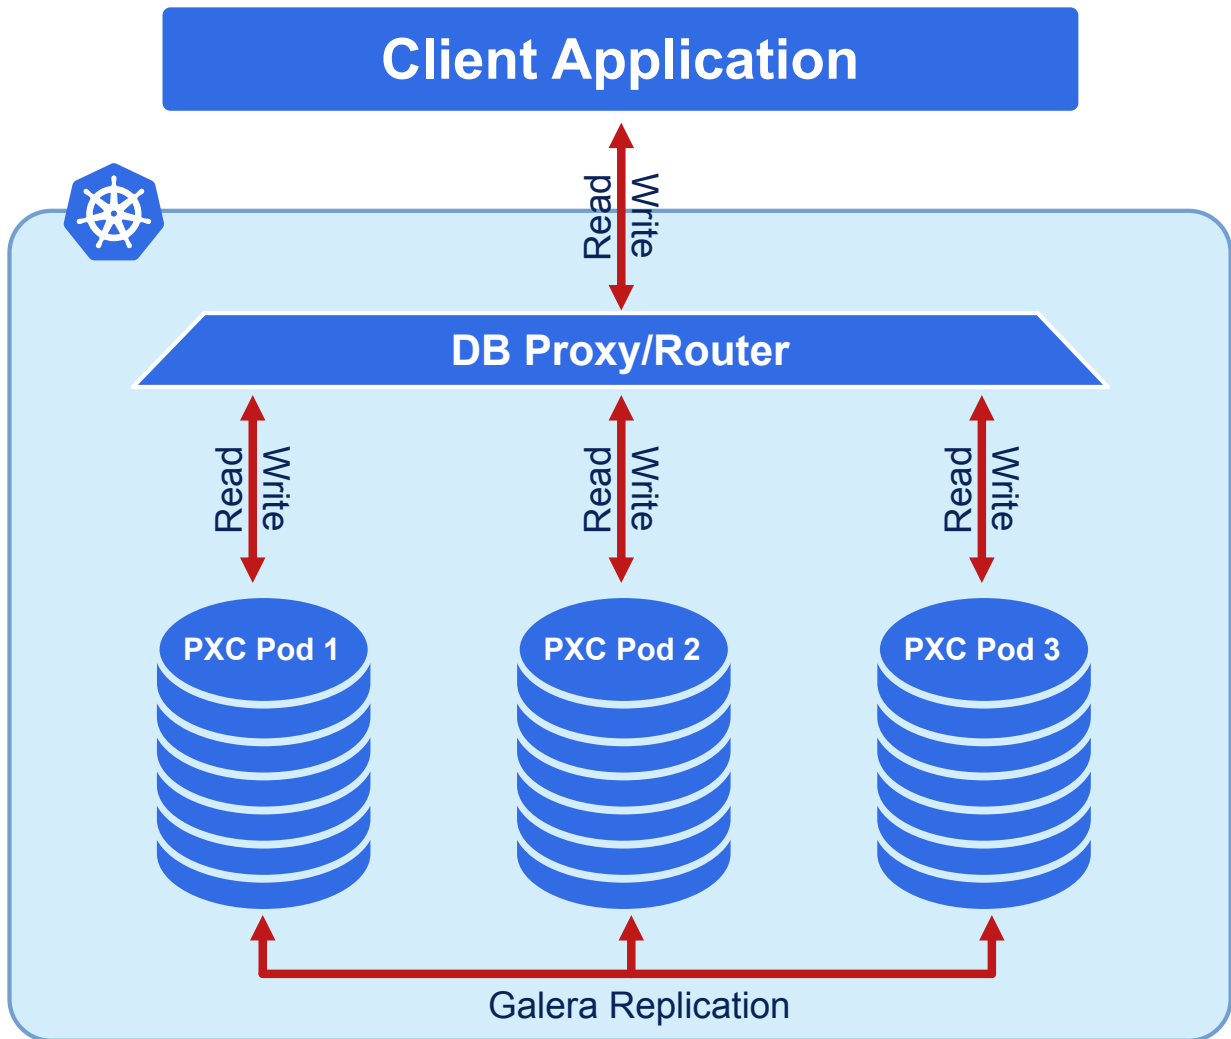

Load balancing and proxy service with [HAProxy](#) is the default choice.

- See [how you can enable and use HAProxy and what are the limitations](#).
- See [how you can enable and use ProxySQL and what are the limitations](#).



## HAProxy

The default HAProxy based setup will contain the `cluster1-haproxy` Service listening on ports 3306 (MySQL primary) and 3309 (the [proxy protocol](#) useful for operations such as asynchronous calls), and also `cluster1-haproxy-replicas` Service for MySQL replicas, listening on port 3306 (this Service **should not be used for write requests**).

You can find the endpoint (the public IP address of the load balancer in our example) by getting the Service object with the `kubectl get service` command. The output will be as follows:

```
$ kubectl get service cluster1-haproxy
NAME                                TYPE           CLUSTER-IP   EXTERNAL-IP   PORT(S)
AGE
cluster1-haproxy                    LoadBalancer   10.12.23.173 <pending>
3306:32548/TCP,3309:30787/TCP,33062:32347/TCP,33060:31867/TCP 14s
cluster1-haproxy-replicas           LoadBalancer   10.12.25.208 <pending>
3306:32166/TCP
14s
```

You can control creation of these two Services with the following Custom Resource options:

- [haproxy.exposePrimary.enabled](#) enables or disables `cluster1-haproxy` Service,
- [haproxy.exposeReplicas.enabled](#) enables or disables `haproxy-replicas` Service.

By default `haproxy-replica` Service directs connections to all Pods of the database cluster in a round-robin manner, but `haproxy.exposeReplicas.onlyReaders` Custom Resource option allows to modify this behavior: setting it to `true` excludes current MySQL primary instance (writer) from the list, leaving only the reader instances. By default the option is set to `false`, which means that `haproxy-replicas` sends traffic to all Pods, including the active writer. The feature can be useful to simplify the application logic by splitting read and write MySQL traffic on the Kubernetes level.

Also, it should be noted that changing `haproxy.exposeReplicas.onlyReaders` value will cause HAProxy Pods to restart.

## ProxySQL

If you configured your cluster with ProxySQL based setup, you will have `cluster1-proxysql` Service. You can find the endpoint (the public IP address of the load balancer in our example) by getting the Service object with the `kubectl get service` command. The output will be as follows:


```
$ kubectl get service cluster1-proxysql
NAME                                TYPE           CLUSTER-IP   EXTERNAL-IP   PORT(S)
AGE
cluster1-proxysql                    LoadBalancer   10.0.238.36  35.192.172.85 3306:30408/TCP,33062:30217/TCP 115s
```

As you could notice, this command also shows mapped ports the application can use to communicate with MySQL primary instance (3306 for the classic MySQL protocol).

You can enable or disable this Service with the [proxysql.expose.enabled](#) Custom Resource option.

## Service per Pod

Still, sometimes it is required to expose all Percona XtraDB Cluster instances, where each of them gets its own IP address (e.g. in case of load balancing implemented on the application level).

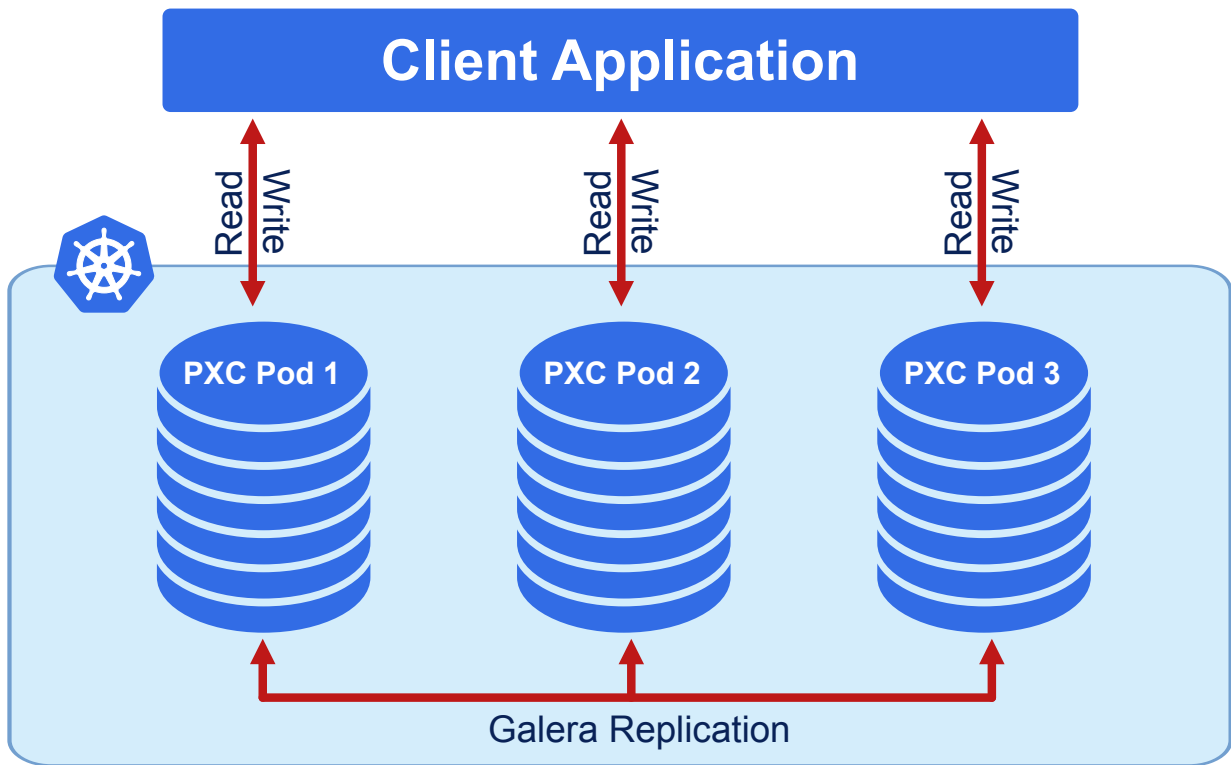

This is possible by setting the following options in [spec.pxc section](#).

- [pxc.expose.enabled](#) enables or disables exposure of Percona XtraDB Cluster instances,
- [pxc.expose.type](#) defines the Kubernetes Service object type.

The following example creates a dedicated LoadBalancer Service for each node of the MySQL cluster:

```
pxc:
  expose:
    enabled: true
    type: LoadBalancer
```

When the cluster instances are exposed in this way, you can find the corresponding Services with the `kubectl get services` command:

```
$ kubectl get services
NAME                                TYPE           CLUSTER-IP      EXTERNAL-IP      PORT(S)          AGE
...
cluster1-pxc-0                      LoadBalancer   10.120.15.23    34.132.93.114   3306:30771/TCP   111s
cluster1-pxc-1                      LoadBalancer   10.120.8.132   35.188.39.15    3306:30832/TCP   111s
cluster1-pxc-2                      LoadBalancer   10.120.14.65   34.16.25.126    3306:32018/TCP   111s
```

As you could notice, this command also shows mapped ports the application can use to communicate with MySQL instances (e.g. 3306 for the classic MySQL protocol, or 33060 for [MySQL X Protocol](#) useful for operations such as asynchronous calls).

# Changing MySQL Options

You may require a configuration change for your application. MySQL allows the option to configure the database with a configuration file. You can pass options from the [my.cnf](#) configuration file to be included in the MySQL configuration in one of the following ways:

- edit the `deploy/cr.yaml` file,
- use a ConfigMap,
- use a Secret object.

Often there's no need to add custom options, as the Operator takes care of providing MySQL with reasonable defaults. Also, some MySQL options can not be changed: you shouldn't change `require_secure_transport` option to `ON`, as it would break the behavior of the Operator.

## Note

If you still need something equal to `require_secure_transport=ON` to force encrypted connections between client and server, the most convenient workaround would be [creating MySQL users](#) with `REQUIRE SSL` option.

If you provide custom configuration to the Operator with several different ways at once, it will choose only one. First, it looks for a Secret object. If no matching Secrets are found, it looks for a custom configuration specified in the Custom Resource (the one provided via the `deploy/cr.yaml` file). If it wasn't found either, the Operator searches for a ConfigMap.

## Edit the `deploy/cr.yaml` file

You can add options from the [my.cnf](#) configuration file by editing the configuration section of the `deploy/cr.yaml`. Here is an example:

```
spec:
  secretsName: cluster1-secrets
  pxc:
    ...
    configuration: |
      [mysqld]
      wsrep_debug=CLIENT
      [sst]
      wsrep_debug=CLIENT
```

See the [Custom Resource options, PXC section](#) for more details.

## Use a ConfigMap

You can use a configmap and the cluster restart to reset configuration options. A configmap allows Kubernetes to pass or update configuration data inside a containerized application.

Use the `kubect1` command to create the configmap from external resources, for more information see [Configure a Pod to use a ConfigMap](#).

For example, let's suppose that your application requires more connections. To increase your `max_connections` setting in MySQL, you define a `my.cnf` configuration file with the following setting:

```
[mysqld]
...
max_connections=250
```

You can create a configmap from the `my.cnf` file with the `kubect1 create configmap` command.

You should use the combination of the cluster name with the `-pxc` suffix as the naming convention for the configmap. To find the cluster name, you can use the following command:

```
$ kubect1 get pxc
```

The syntax for `kubect1 create configmap` command is:

```
$ kubectl create configmap <cluster-name>-pxc <resource-type=resource-name>
```

The following example defines `cluster1-pxc` as the configmap name and the `my.cnf` file as the data source:

```
$ kubectl create configmap cluster1-pxc --from-file=my.cnf
```

To view the created configmap, use the following command:

```
$ kubectl describe configmaps cluster1-pxc
```

## Use a Secret Object

The Operator can also store configuration options in [Kubernetes Secrets](#). This can be useful if you need additional protection for some sensitive data.

You should create a Secret object with a specific name, composed of your cluster name and the `pxc` suffix.

### Note

To find the cluster name, you can use the following command:

```
$ kubectl get pxc
```

Configuration options should be put inside a specific key inside of the `data` section. The name of this key is `my.cnf` for Percona XtraDB Cluster Pods.

Actual options should be encoded with [Base64](#).

For example, let's define a `my.cnf` configuration file and put there a pair of MySQL options we used in the previous example:

```
[mysqld]
wsrep_debug=CLIENT
[sst]
wsrep_debug=CLIENT
```

You can get a Base64 encoded string from your options via the command line as follows:

### in Linux

```
$ cat my.cnf | base64 --wrap=0
```

### in macOS

```
$ cat my.cnf | base64
```

### Note

Similarly, you can read the list of options from a Base64 encoded string:

```
$ echo "W215c3FsZF0Kd3NyZXBfZGVidWc9T04KW3NzdF0Kd3NyZXBfZGVidWc9T04K" | base64 --decode
```

Finally, use a yaml file to create the Secret object. For example, you can create a `deploy/my-pxc-secret.yaml` file with the following contents:

```
apiVersion: v1
kind: Secret
metadata:
  name: cluster1-pxc
data:
  my.cnf: "W215c3FsZF0Kd3NyZXBfZGVidWc9T04KW3NzdF0Kd3NyZXBfZGVidWc9T04K"
```

When ready, apply it with the following command:

```
$ kubectl create -f deploy/my-pxc-secret.yaml
```

**Note**

Do not forget to restart Percona XtraDB Cluster to ensure the cluster has updated the configuration.

## Make changed options visible to Percona XtraDB Cluster

Do not forget to restart Percona XtraDB Cluster to ensure the cluster has updated the configuration (see details on how to connect in the [Install Percona XtraDB Cluster on Kubernetes](#) page).

## Auto-tuning MySQL options

Few configuration options for MySQL can be calculated and set by the Operator automatically based on the available Pod resource limits (memory and CPU) if **constant values for these options are not specified by user** (either in CR.yaml or in ConfigMap).

Options which can be set automatically are the following ones:

- `innodb_buffer_pool_size`
- `max_connections`

If Percona XtraDB Cluster Pod limits are defined, then limits values are used to calculate these options. If Percona XtraDB Cluster Pod limits are not defined, auto-tuning is not done.

Also, starting from the Operator 1.12.0, there is another way of auto-tuning. You can use `"{{ containerMemoryLimit }}"` as a value in `spec.pxc.configuration` as follows:

```
pxc:
  configuration: |
    [mysqld]
    innodb_buffer_pool_size={{containerMemoryLimit * 3 / 4}}
    ...
```

# Binding Percona XtraDB Cluster components to Specific Kubernetes/OpenShift Nodes

The operator does good job automatically assigning new Pods to nodes with sufficient to achieve balanced distribution across the cluster. Still there are situations when it worth to ensure that pods will land on specific nodes: for example, to get speed advantages of the SSD equipped machine, or to reduce costs choosing nodes in a same availability zone.

Appropriate sections of the [deploy/cr.yaml](#) file (such as `pxc`, `haproxy`, and `proxysql`) contain keys which can be used to do this, depending on what is the best for a particular situation.

## Node selector

`nodeSelector` contains one or more key-value pairs. If the node is not labeled with each key-value pair from the Pod's `nodeSelector`, the Pod will not be able to land on it.

The following example binds the Pod to any node having a self-explanatory `disktype: ssd` label:

```
nodeSelector:  
  disktype: ssd
```

## Affinity and anti-affinity

Affinity makes Pod eligible (or not eligible - so called "anti-affinity") to be scheduled on the node which already has Pods with specific labels. Particularly this approach is good to reduce costs making sure several Pods with intensive data exchange will occupy the same availability zone or even the same node - or, on the contrary, to make them land on different nodes or even different availability zones for the high availability and balancing purposes.

Percona Operator for MySQL provides two approaches for doing this:

- simple way to set anti-affinity for Pods, built-in into the Operator,
- more advanced approach based on using standard Kubernetes constraints.

### Simple approach - use topologyKey of the Percona Operator for MySQL

Percona Operator for MySQL provides a `topologyKey` option, which may have one of the following values:

- `kubernetes.io/hostname` - Pods will avoid residing within the same host,
- `topology.kubernetes.io/zone` - Pods will avoid residing within the same zone,
- `topology.kubernetes.io/region` - Pods will avoid residing within the same region,
- `none` - no constraints are applied.

The following example forces Percona XtraDB Cluster Pods to avoid occupying the same node:

```
affinity:  
  topologyKey: "kubernetes.io/hostname"
```

### Advanced approach - use standard Kubernetes constraints

Previous way can be used with no special knowledge of the Kubernetes way of assigning Pods to specific nodes. Still in some cases more complex tuning may be needed. In this case `advanced` option placed in the [deploy/cr.yaml](#) file turns off the effect of the `topologyKey` and allows to use standard Kubernetes affinity constraints of any complexity:

```

affinity:
  advanced:
    podAffinity:
      requiredDuringSchedulingIgnoredDuringExecution:
        - labelSelector:
            matchExpressions:
              - key: security
                operator: In
                values:
                  - S1
            topologyKey: topology.kubernetes.io/zone
    podAntiAffinity:
      preferredDuringSchedulingIgnoredDuringExecution:
        - weight: 100
          podAffinityTerm:
            labelSelector:
              matchExpressions:
                - key: security
                  operator: In
                  values:
                    - S2
            topologyKey: kubernetes.io/hostname
    nodeAffinity:
      requiredDuringSchedulingIgnoredDuringExecution:
        nodeSelectorTerms:
          - matchExpressions:
              - key: kubernetes.io/e2e-az-name
                operator: In
                values:
                  - e2e-az1
                  - e2e-az2
            preferredDuringSchedulingIgnoredDuringExecution:
              - weight: 1
                preference:
                  matchExpressions:
                    - key: another-node-label-key
                      operator: In
                      values:
                        - another-node-label-value

```

See explanation of the advanced affinity options [in Kubernetes documentation](#).

## Tolerations

*Tolerations* allow Pods having them to be able to land onto nodes with matching *taints*. Toleration is expressed as a `key` with an `operator`, which is either `exists` or `equal` (the latter variant also requires a `value` the key is equal to). Moreover, toleration should have a specified `effect`, which may be a self-explanatory `NoSchedule`, less strict `PreferNoSchedule`, or `NoExecute`. The last variant means that if a *taint* with `NoExecute` is assigned to node, then any Pod not tolerating this *taint* will be removed from the node, immediately or after the `tolerationSeconds` interval, like in the following example:

```

tolerations:
- key: "node.alpha.kubernetes.io/unreachable"
  operator: "Exists"
  effect: "NoExecute"
  tolerationSeconds: 6000

```

The [Kubernetes Taints and Tolerations](#) contains more examples on this topic.

## Priority Classes


Pods may belong to some *priority classes*. This allows scheduler to distinguish more and less important Pods to resolve the situation when some higher priority Pod cannot be scheduled without evicting a lower priority one. This can be done adding one or more `PriorityClasses` in your Kubernetes cluster, and specifying the `PriorityClassName` in the [deploy/cr.yaml](#) file:

```
priorityClassName: high-priority
```

See the [Kubernetes Pods Priority and Preemption documentation](#) to find out how to define and use priority classes in your cluster.

## Pod Disruption Budgets

Creating the *Pod Disruption Budget* is the Kubernetes style to limits the number of Pods of an application that can go down simultaneously due to such *voluntary disruptions* as cluster administrator's actions during the update of deployments or nodes, etc. By such a way Distribution Budgets allow large applications to retain their high availability while maintenance and other administrative activities.

We recommend to apply Pod Disruption Budgets manually to avoid situation when Kubernetes stopped all your database Pods. See [the official Kubernetes documentation](#)  for details.



# Labels and annotations

[Labels](#) and [annotations](#) are used to attach additional metadata information to Kubernetes resources.

Labels and annotations are rather similar. The difference between them is that labels are used by Kubernetes to identify and select objects, while annotations are assigning additional *non-identifying* information to resources. Therefore, typical role of Annotations is facilitating integration with some external tools.

## Setting labels and annotations in the Custom Resource

You can set labels and/or annotations as key/value string pairs in the Custom Resource metadata section of the `deploy/cr.yaml` as follows:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBCluster
metadata:
  name: cluster1
  annotations:
    percona.com/issue-vault-token: "true"
  labels:
    ...
```

### Note

Setting `percona.com/issue-vault-token: "true"` annotation is just an example, but this exact annotation has a special meaning. If you add this annotation present and have [HashiCorp Vault](#) installed (for example, it is used for [data at rest encryption](#)), the Operator will not start a cluster but will be printing a `wait for token issuing` log message in a loop until the annotation is deleted (for example, this can be combined with a user's automation script making some Vault-related preparations).

The easiest way to check which labels are attached to a specific object with is using the additional `--show-labels` option of the `kubectl get` command. Checking the annotations is not much more difficult: it can be done as in the following example:

```
$ kubectl get pod cluster1-pxc-0 -o jsonpath='{.metadata.annotations}'
```

## Specifying labels and annotations ignored by the Operator

Sometimes various Kubernetes flavors can add their own annotations to the objects managed by the Operator.

The Operator keeps track of all changes to its objects and can remove annotations that appeared without its participation.

If there are no annotations or labels in the Custom Resource, the Operator does nothing if new label or annotation added to the object.

If there is an annotation or a label specified in the Custom Resource, the Operator starts to manage annotations and labels. In this case it removes unknown annotations and labels.

Still, it is possible to specify which annotations and labels should be ignored by the Operator by listing them in the `spec.ignoreAnnotations` or `spec.ignoreLabels` keys of the `deploy/cr.yaml`, as follows:

```
spec:
  ignoreAnnotations:
    - some.custom.cloud.annotation/smith
  ignoreLabels:
    - some.custom.cloud.label/smith
  ...
```

The Operator will ignore any Service annotation or label, key of which **starts** with the mentioned above examples. For example, the following annotations and labels will be ignored after applying the above `cr.yaml` fragment:

```
annotations:
  some.custom.cloud.annotation/smith: somethinghere
labels:
  some.custom.cloud.label/smith: somethinghere
```

# Local Storage support for the Percona Operator for MySQL

Among the wide range of volume types, available in Kubernetes, there are some which allow Pod containers to access part of the local filesystem on the node. Two such options provided by Kubernetes itself are *emptyDir* and *hostPath* volumes. More comprehensive setups require additional components, such as [OpenEBS Container Attached Storage solution](#) [↗](#)

## emptyDir

The name of this option is self-explanatory. When Pod having an [emptyDir volume](#) [↗](#) is assigned to a Node, a directory with the specified name is created on this node and exists until this Pod is removed from the node. When the Pod have been deleted, the directory is deleted too with all its content. All containers in the Pod which have mounted this volume will gain read and write access to the correspondent directory.

The `emptyDir` options in the [deploy/cr.yaml](#) [↗](#) file can be used to turn the `emptyDir` volume on by setting the directory name.

## hostPath

A [hostPath volume](#) [↗](#) mounts some existing file or directory from the node's filesystem into the Pod.

The `volumeSpec.hostPath` subsection in the [deploy/cr.yaml](#) [↗](#) file may include `path` and `type` keys to set the node's filesystem object path and to specify whether it is a file, a directory, or something else (e.g. a socket):

```
volumeSpec:
  hostPath:
    path: /data
    type: Directory
```

Please note, that `hostPath` directory is not created automatically! It should be [created manually on the node's filesystem](#). Also, it should have the attributives (access permissions, ownership, SELinux security context) which would allow Pod to access the correspondent filesystem objects according to [pxc.containerSecurityContext](#) and [pxc.podSecurityContext](#).

`hostPath` is useful when you are able to perform manual actions during the first run and have strong need in improved disk performance. Also, please consider using tolerations to avoid cluster migration to different hardware in case of a reboot or a hardware failure.

More details can be found in the [official hostPath Kubernetes documentation](#) [↗](#).

## OpenEBS Local Persistent Volume Hostpath

Both *emptyDir* and *hostPath* volumes do not support [Dynamic Volume Provisioning](#) [↗](#). Options that allow combining Dynamic Volume Provisioning with Local Persistent Volumes are provided by [OpenEBS](#) [↗](#). Particularly, [OpenEBS Local PV Hostpath](#) [↗](#) allows creating Kubernetes Local Persistent Volumes using a directory (Hostpath) on the node. Such volume can be further accessed by applications via [Storage Class](#) [↗](#) and [PersistentVolumeClaim](#) [↗](#).

Using it involves the following steps.

1. Install OpenEBS on your system along with the official [installation guide](#) [↗](#).
2. Define a new [Kubernetes Storage Class](#) [↗](#) with OpenEBS with the YAML file (e. g. `local-hostpath.yaml`) as follows:

```
apiVersion: storage.k8s.io/v1
kind: StorageClass
metadata:
  name: localpv
  annotations:
    openebs.io/cas-type: local
    cas.openebs.io/config: |
      - name: StorageType
        value: hostpath
      - name: BasePath
        value: /var/local-hostpath
provisioner: openebs.io/local
reclaimPolicy: Delete
volumeBindingMode: WaitForFirstConsumer
```

Two things to edit in this example are the `metadata.name` key (you will use it as a storage class name) and the `value` option under the `cas.openebs.io/config` (it should point to an already existing directory on the local filesystem of your node).

When ready, apply the file with the `kubectl apply -f local-hostpath.yaml` command.

3. Now you can deploy the Operator and Percona XtraDB Cluster using this StorageClass in `deploy/cr.yaml`:

```
...
volumeSpec:
  persistentVolumeClaim:
    storageClassName: localpv
    accessModes: [ "ReadWriteOnce" ]
    resources:
      requests:
        storage: 200Gi
```

#### Note

There are other storage options provided by the OpenEBS, which may be helpful within your cluster setup. Look at the [OpenEBS for the Management of Kubernetes Storage Volumes](#) blog post for more examples. Also, consider looking at the [Measuring OpenEBS Local Volume Performance Overhead in Kubernetes](#) post.

## Define environment variables

Sometimes you need to define new environment variables to provide additional configuration for the components of your cluster. For example, you can use it to customize the configuration of HAProxy, or to add additional options for PMM Client.

The Operator can store environment variables in [Kubernetes Secrets](#). Here is an example with several options related to HAProxy:

```
apiVersion: v1
kind: Secret
metadata:
  name: my-env-var-secrets
type: Opaque
data:
  HA_CONNECTION_TIMEOUT: MTAwMA==
  OK_IF_DONOR: MQ==
  HA_SERVER_OPTIONS: Y2h1Y2sgaW50ZXIgaWZAwMDAgcm1zZSxIGZhbGwgNSB3ZWlnaHQgMQ==
```

### Note

[Variables used in this example have the following effect:](#)

- [HA\\_CONNECTION\\_TIMEOUT](#) allows to set custom timeout for health checks done by HAProxy (it repeatedly executes a simple status query on XtraDB Cluster instances). The default 10 seconds timeout is good for most workloads, but increase should be helpful in case of unstable Kubernetes network or soft lockups happening on Kubernetes nodes.
- [OK\\_IF\\_DONOR](#) allows application connections to XtraDB Cluster donors. The backup is running on the donor node, and SQL queries combined with it could run slower than usual. Enable the option to grant application access when there is only one XtraDB Cluster node alive, and a second XtraDB Cluster node is joining the cluster via SST.
- [HA\\_SERVER\\_OPTIONS](#) allows to set the custom options for the server in the HAProxy configuration file. You can start with the default `check inter 30000 rise 1 fall 5 weight 1` set, and add required options [referenced in the upstream documentation](#).

As you can see, environment variables are stored as `data` - i.e., base64-encoded strings, so you'll need to encode the value of each variable. For example, To have `HA_CONNECTION_TIMEOUT` variable equal to `1000`, you can run `echo -n "1000" | base64 --wrap=0` (or just `echo -n "1000" | base64` in case of Apple macOS) in your local shell and get `MTAwMA==`.

### Note

Similarly, you can read the list of options from a Base64-encoded string:

```
$ echo "MTAwMA==" | base64 --decode
```

When ready, apply the YAML file with the following command:

```
$ kubectl create -f deploy/my-env-secret.yaml
```

Put the name of this Secret to the `envVarsSecret` key either in `pxc`, `haproxy` or `proxysql` section of the `deploy/cr.yaml` configuration file:

```
haproxy:
  ...
  envVarsSecret: my-env-var-secrets
  ...
```

Now apply the `deploy/cr.yaml` file with the following command:

```
$ kubectl apply -f deploy/cr.yaml
```

Another example shows how to pass `LD_PRELOAD` environment variable with the alternative memory allocator library name to `mysqld`. It's often a recommended practice to try using an alternative allocator library for `mysqld` in case the memory usage is suspected to be higher than expected, and you can use `jemalloc` allocator already present in Percona XtraDB Cluster Pods with the following environment variable:

```
LD_PRELOAD=/usr/lib64/libjemalloc.so.1
```

Create a new YAML file with the contents similar to the previous example, but with `LD_PRELOAD` variable, stored as base64-encoded strings:

```
apiVersion: v1
kind: Secret
metadata:
  name: my-new-env-var-secrets
type: Opaque
data:
  LD_PRELOAD: L3Vzci9saWI2NC9saWJqZW1hbGxvYy5zby4x
```

If this YAML file was named `deploy/my-new-env-var-secret`, the command to apply it will be the following one:

```
$ kubectl create -f deploy/my-new-env-secret.yaml
```

Now put the name of this new Secret to the `envVarsSecret` key in `pxc` section of the `deploy/cr.yaml` configuration file:

```
pxc:
  ....
  envVarsSecret: my-new-env-var-secrets
  ....
```

Don't forget to apply the `deploy/cr.yaml` file, as usual:

```
$ kubectl apply -f deploy/cr.yaml
```

# Configuring Load Balancing with HAProxy

You can use either [HAProxy](#) or [ProxySQL](#) for load balancing and proxy services.

You can control which one to use, if any, by enabling or disabling via the `haproxy.enabled` and `proxysql.enabled` options in the `deploy/cr.yaml` configuration file.

Use the following command to enable HAProxy:

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "haproxy": {
      "enabled": true,
      "size": 3,
      "image": "percona/percona-xtradb-cluster-operator:1.17.0-haproxy" },
    "proxysql": { "enabled": false }
  }
}'
```

## Warning

Switching from ProxySQL to HAProxy will cause Percona XtraDB Cluster Pods restart. Switching from HAProxy to ProxySQL is not possible, and if you need ProxySQL, this should be configured at cluster creation time.

## HAProxy services

The Operator creates two services for HAProxy:

### `cluster1-haproxy` service

The `cluster1-haproxy` service listens on the following ports:

- `3306` is the default MySQL port. It is used by the `mysql` client, MySQL Connectors, and utilities such as `mysqldump` and `mysqlpump`
- `3309` is the [proxy protocol](#) port. Proxy protocol is used to store the client's IP address
- `33062` is the port to connect to the MySQL Administrative Interface
- `33060` is the port for the [MySQLX protocol](#). It is supported by clients such as MySQL Shell, MySQL Connectors and MySQL Router
- `8404` is the port to connect to the [HAProxy statistics page](#)

The `haproxy.enabled` Custom Resource option enables or disables `cluster1-haproxy` service.

By default, the `cluster1-haproxy` service points to the number zero Percona XtraDB Cluster member (`cluster1-pxc-0`), when this member is available. If a zero member is not available, members are selected in descending order of their numbers: `cluster1-pxc-2`, then `cluster1-pxc-1`. This service can be used for both read and write load, or it can also be used just for write load (single writer mode) in setups with split write and read loads.

The `haproxy.exposePrimary.enabled` Custom Resource option enables or disables the `cluster1-haproxy` service.

### `cluster1-haproxy-replicas` service

The `cluster1-haproxy-replicas` service listens on port 3306 (MySQL).

This service selects Percona XtraDB Cluster members to serve queries following the Round Robin load balancing algorithm.

**Don't use it for write requests.**

The `haproxy.exposeReplicas.enabled` Custom Resource option enables or disables `cluster1-haproxy-replicas` service (on by default).

#### Note

If you need to configure `cluster1-haproxy` and `cluster1-haproxy-replicas` as a headless Service [↗](#) (e.g. to use on the tenant network), add the following [annotation](#) in the Custom Resource metadata section of the `deploy/cr.yaml`:

```
yaml
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBCluster
metadata:
  name: cluster1
  annotations:
    percona.com/headless-service: true
  ...
```

This annotation works only at service creation time and can't be added later.

When the cluster with HAProxy is upgraded, the following steps take place. First, reader members are upgraded one by one: the Operator waits until the upgraded Percona XtraDB Cluster member becomes synced, and then proceeds to upgrade the next member. When the upgrade is finished for all the readers, then the writer Percona XtraDB Cluster member is finally upgraded.

## Exposing HAProxy

You can expose HAProxy, so that clients can connect to your database cluster from the outside. To do so, you need to set the service type `LoadBalancer` for the `haproxy-primary` service.

By default, the HAProxy is available for all clients. If you need to restrict the client IP addresses from which the load balancer should be reachable, list these IP addresses in the `loadBalancerSourceRanges` option.

Edit the `deploy/cr.yaml` Custom Resource manifest and specify the following configuration:

```
spec:
  haproxy:
    exposePrimary:
      type: LoadBalancer
      loadBalancerSourceRanges:
        - 10.0.0.0/8
```

Note that the `haproxy-replica` service inherits this setup. You can override it for the `haproxy-replica` service by setting the IP ranges to access the cluster for read requests. The configuration for the `haproxy-replica` service will be as follows:

```
spec:
  haproxy:
    enabled: true
    exposeReplicas:
      enabled: true
      type: LoadBalancer
```

## Passing custom configuration options to HAProxy

You can pass custom configuration to HAProxy in one of the following ways:

- edit the `deploy/cr.yaml` file,
- use a ConfigMap,
- use a Secret object.

#### Note

If you specify a custom HAProxy configuration in this way, the Operator doesn't provide its own HAProxy configuration file except [several hardcoded options](#) [↗](#) (which therefore can't be overwritten). That's why you should specify either a full set of configuration options or nothing. Additionally, when [upgrading Percona XtraDB Cluster](#) it would be wise to check the [HAProxy configuration file](#) [↗](#) provided by the Operator and make sure that your custom config is still compatible with the new variant.

## Edit the `deploy/cr.yaml` file

You can add options from the [haproxy.cfg](#) configuration file by editing `haproxy.configuration` key in the `deploy/cr.yaml` file. Here is an example:

```
...
haproxy:
  enabled: true
  size: 3
  image: percona/percona-xtradb-cluster-operator:1.17.0-haproxy
  configuration: |
    global
      maxconn 2048
      external-check
      stats socket /var/run/haproxy.sock mode 600 expose-fd listeners level user
    defaults
      log global
      mode tcp
      retries 10
      timeout client 10000
      timeout connect 100500
      timeout server 10000
    frontend galera-in
      bind *:3309 accept-proxy
      bind *:3306
      mode tcp
      option clitcpka
      default_backend galera-nodes

    frontend galera-admin-in
      bind *:33062
      mode tcp
      option clitcpka
      default_backend galera-admin-nodes

    frontend galera-replica-in
      bind *:3307
      mode tcp
      option clitcpka
      default_backend galera-replica-nodes

    frontend galera-mysqlx-in
      bind *:33060
      mode tcp
      option clitcpka
      default_backend galera-mysqlx-nodes

    frontend stats
      bind *:8404
      mode http
      http-request use-service prometheus-exporter if { path /metrics }
```

## Use a ConfigMap

You can use a configmap and the cluster restart to reset configuration options. A configmap allows Kubernetes to pass or update configuration data inside a containerized application.

Use the `kubect1` command to create the configmap from external resources, for more information see [Configure a Pod to use a ConfigMap](#).

For example, you define a `haproxy.cfg` configuration file with the following setting:



```

global
  maxconn 2048
  external-check
  stats socket /var/run/haproxy.sock mode 600 expose-fd listeners level user
defaults
  log global
  mode tcp
  retries 10
  timeout client 10000
  timeout connect 100500
  timeout server 10000
frontend galera-in
  bind *:3309 accept-proxy
  bind *:3306
  mode tcp
  option clitcpka
  default_backend galera-nodes
frontend galera-admin-in
  bind *:33062
  mode tcp
  option clitcpka
  default_backend galera-admin-nodes
frontend galera-replica-in
  bind *:3307
  mode tcp
  option clitcpka
  default_backend galera-replica-nodes
frontend galera-mysqlx-in
  bind *:33060
  mode tcp
  option clitcpka
  default_backend galera-mysqlx-nodes
frontend stats
  bind *:8404
  mode http
  http-request use-service prometheus-exporter if { path /metrics }

```

You can create a configmap from the `haproxy.cfg` file with the `kubectl create configmap` command.

You should use the combination of the cluster name with the `-haproxy` suffix as the naming convention for the configmap. To find the cluster name, you can use the following command:

```
$ kubectl get pxc
```

The syntax for `kubectl create configmap` command is:

```
kubectl create configmap <cluster-name>-haproxy <resource-type=resource-name>
```

The following example defines `cluster1-haproxy` as the configmap name and the `haproxy.cfg` file as the data source:

```
$ kubectl create configmap cluster1-haproxy --from-file=haproxy.cfg
```

To view the created configmap, use the following command:

```
$ kubectl describe configmaps cluster1-haproxy
```

## Use a Secret Object

The Operator can also store configuration options in [Kubernetes Secrets](#). This can be useful if you need additional protection for some sensitive data.

You should create a Secret object with a specific name, composed of your cluster name and the `haproxy` suffix.

**Note**

To find the cluster name, you can use the following command:

```
$ kubectl get pxc
```

Configuration options should be put inside a specific key inside of the `data` section. The name of this key is `haproxy.cfg` for ProxySQL Pods.

Actual options should be encoded with [Base64](#).

For example, let's define a `haproxy.cfg` configuration file and put there options we used in the previous example:

```
global
  maxconn 2048
  external-check
  stats socket /var/run/haproxy.sock mode 600 expose-fd listeners level user
defaults
  log global
  mode tcp
  retries 10
  timeout client 10000
  timeout connect 100500
  timeout server 10000
frontend galera-in
  bind *:3309 accept-proxy
  bind *:3306
  mode tcp
  option clitcpka
  default_backend galera-nodes
frontend galera-admin-in
  bind *:33062
  mode tcp
  option clitcpka
  default_backend galera-admin-nodes
frontend galera-replica-in
  bind *:3307
  mode tcp
  option clitcpka
  default_backend galera-replica-nodes
frontend galera-mysqlx-in
  bind *:33060
  mode tcp
  option clitcpka
  default_backend galera-mysqlx-nodes
frontend stats
  bind *:8404
  mode http
  http-request use-service prometheus-exporter if { path /metrics }
```

You can get a Base64 encoded string from your options via the command line as follows:

**in Linux**

```
$ cat haproxy.cfg | base64 --wrap=0
```

**in macOS**

```
$ cat haproxy.cfg | base64
```

#### Note

Similarly, you can read the list of options from a Base64 encoded string:

```
$ echo "IGdsb2JhbAogICBtYXhjb25uIDIwNDgKICAgZXh0ZXJlY2sKICAgc3RhdHMgc29ja2V0\  
IC92YXlvcnVul2hhchJveHkuc29jayBtb2RlIDYwMmBlcHBvc2UzZmQgbG1zdGVuZlZlIGxldmVs\  
IHVzZXIKIGRlZmF1bHRzCiAgIGxvZyBnbG9iYWwKICAgbW9kZSB0Y3AKICAgcmV0cmllcyAxMAog\  
ICB0aW1lb3V0IGNsaWVudCAxMDAwMAogICB0aW1lb3V0IGNvbm5lY3QgMTAwNTAwCiAgIHRpbWVv\  
dXQgc2VydmlvYDEwMDAwCiBmcm9udGVuZCBnYWxlcmeW4KICAgYm1uZCAQ0jMzMDkgYWNjZXB0\  
LXByb3h5CiAgIGJpbmQgKjozMzA2CiAgIG1vZGUgdGNwCiAgIG9wdGlvbiBjbG10Y3BrYQogICBk\  
ZWZhdWx0X2JhY2t1bmqGZ2FzZXJhLW5vZGVzCiBmcm9udGVuZCBnYWxlcmeWVwbG1jYS1pbGog\  
ICBiaW5kICo6MzMwOSBhY2NlcHQtchJveHkKICAgYm1uZCAQ0jMzMDcKICAgbW9kZSB0Y3AKICAg\  
b3B0aW9uIGNsaXRjcGthCiAgIGRlZmF1bHRfYmFja2VuZCBnYWxlcmeWVwbG1jYS1ub2Rlcwo=" | base64 --decode
```

Finally, use a yaml file to create the Secret object. For example, you can create a `deploy/my-haproxy-secret.yaml` file with the following contents:

```
apiVersion: v1  
kind: Secret  
metadata:  
  name: cluster1-haproxy  
data:  
  haproxy.cfg: "IGdsb2JhbAogICBtYXhjb25uIDIwNDgKICAgZXh0ZXJlY2sKICAgc3RhdHMgc29ja2V0\  
IC92YXlvcnVul2hhchJveHkuc29jayBtb2RlIDYwMmBlcHBvc2UzZmQgbG1zdGVuZlZlIGxldmVs\  
IHVzZXIKIGRlZmF1bHRzCiAgIGxvZyBnbG9iYWwKICAgbW9kZSB0Y3AKICAgcmV0cmllcyAxMAog\  
ICB0aW1lb3V0IGNsaWVudCAxMDAwMAogICB0aW1lb3V0IGNvbm5lY3QgMTAwNTAwCiAgIHRpbWVv\  
dXQgc2VydmlvYDEwMDAwCiBmcm9udGVuZCBnYWxlcmeW4KICAgYm1uZCAQ0jMzMDkgYWNjZXB0\  
LXByb3h5CiAgIGJpbmQgKjozMzA2CiAgIG1vZGUgdGNwCiAgIG9wdGlvbiBjbG10Y3BrYQogICBk\  
ZWZhdWx0X2JhY2t1bmqGZ2FzZXJhLW5vZGVzCiBmcm9udGVuZCBnYWxlcmeWVwbG1jYS1pbGog\  
ICBiaW5kICo6MzMwOSBhY2NlcHQtchJveHkKICAgYm1uZCAQ0jMzMDcKICAgbW9kZSB0Y3AKICAg\  
b3B0aW9uIGNsaXRjcGthCiAgIGRlZmF1bHRfYmFja2VuZCBnYWxlcmeWVwbG1jYS1ub2Rlcwo="
```

When ready, apply it with the following command:

```
$ kubectl create -f deploy/my-haproxy-secret.yaml
```

#### Note

Do not forget to restart Percona XtraDB Cluster to ensure the cluster has updated the configuration.

## Enabling the Proxy protocol

The Proxy protocol [allows](#) HAProxy to provide a real client address to Percona XtraDB Cluster.

#### Note

To use this feature, you should have a Percona XtraDB Cluster image version `8.0.21` or newer.

Normally Proxy protocol is disabled, and Percona XtraDB Cluster sees the IP address of the proxying server (HAProxy) instead of the real client address. But there are scenarios when making real client IP-address visible for Percona XtraDB Cluster is important: e.g. it allows to have privilege grants based on client/application address, and significantly enhance auditing.

You can enable Proxy protocol on Percona XtraDB Cluster by adding `proxy_protocol_networks` option to `pxc.configuration` key in the `deploy/cr.yaml` configuration file.

#### Note

Depending on the load balancer of your cloud provider, you may also need setting `haproxy.externaltrafficpolicy` option in `deploy/cr.yaml`.

More information about Proxy protocol can be found in the [official HAProxy documentation](#).

# Configuring Load Balancing with ProxySQL

You can use either [HAProxy](#) or [ProxySQL](#) for load balancing and proxy services.

You can control which one to use: enable or disable the `haproxy.enabled` and `proxysql.enabled` options in the `deploy/cr.yaml` configuration file.

## Warning

You can enable ProxySQL only when you create a cluster. For a running cluster you can enable only HAProxy. Also note, if you have already enabled HAProxy, the switch from it to ProxySQL is not possible.

## cluster1-proxysql service

The `cluster1-proxysql` service listens on the following ports:

- `3306` is the default MySQL port. It is used by the `mysql` client, MySQL Connectors, and utilities such as `mysqldump` and `mysqlpump`
- `33062` is the port to connect to the MySQL Administrative Interface
- `6070` is the port to connect to the built-in Prometheus exporter to gather ProxySQL statistics and manage the ProxySQL observability stack

The `cluster1-proxysql` service uses the number zero Percona XtraDB Cluster member (`cluster1-pxc-0` by default) as the writer.

[proxysql.expose.enabled](#) Custom Resource option enables or disables the `cluster1-proxysql` service.

## Note

If you need to configure ProxySQL service as a headless Service (e.g. to use on the tenant network), add the following annotation in the Custom Resource metadata section of the `deploy/cr.yaml`:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBCluster
metadata:
  name: cluster1
  annotations:
    percona.com/headless-service: true
  ...
```

This annotation works only at service creation time and can't be added later.

When a cluster with ProxySQL is upgraded, the following steps take place. First, reader members are upgraded one by one: the Operator waits until the upgraded member shows up in ProxySQL with online status, and then proceeds to upgrade the next member. When the upgrade is finished for all the readers, then the writer Percona XtraDB Cluster member is finally upgraded.

## Note

when both ProxySQL and Percona XtraDB Cluster are upgraded, they are upgraded in parallel.

## Passing custom configuration options to ProxySQL

You can pass custom configuration to ProxySQL

- edit the `deploy/cr.yaml` file,
- use a ConfigMap,
- use a Secret object.

## Note

If you specify a custom ProxySQL configuration in this way, ProxySQL will try to merge the passed parameters with the previously set configuration parameters, if any. If ProxySQL fails to merge some option, you will see a warning in its log.

## Edit the `deploy/cr.yaml` file

You can add options from the [proxysql.cnf](#) configuration file by editing the `proxysql.configuration` key in the `deploy/cr.yaml` file. Here is an example:

```
...
proxysql:
  enabled: true
  size: 3
  image: percona/percona-xtradb-cluster-operator:1.17.0-proxysql
  configuration: |
    datadir="/var/lib/proxysql"

    admin_variables =
    {
      admin_credentials="proxyadmin:admin_password"
      mysql_ifaces="0.0.0.0:6032"
      refresh_interval=2000
      restapi_enabled=true
      restapi_port=6070

      cluster_username="proxyadmin"
      cluster_password="admin_password"
      cluster_check_interval_ms=200
      cluster_check_status_frequency=100
      cluster_mysql_query_rules_save_to_disk=true
      cluster_mysql_servers_save_to_disk=true
      cluster_mysql_users_save_to_disk=true
      cluster_proxysql_servers_save_to_disk=true
      cluster_mysql_query_rules_diffs_before_sync=1
      cluster_mysql_servers_diffs_before_sync=1
      cluster_mysql_users_diffs_before_sync=1
      cluster_proxysql_servers_diffs_before_sync=1
    }

  mysql_variables=
  {
    monitor_password="monitor"
    monitor_galera_healthcheck_interval=1000
    threads=2
    max_connections=2048
    default_query_delay=0
    default_query_timeout=10000
    poll_timeout=2000
    interfaces="0.0.0.0:3306"
    default_schema="information_schema"
    stacksize=1048576
    connect_timeout_server=10000
    monitor_history=60000
    monitor_connect_interval=20000
    monitor_ping_interval=10000
    ping_timeout_server=200
    commands_stats=true
    sessions_sort=true
    have_ssl=true
    ssl_p2s_ca="/etc/proxysql/ssl-internal/ca.crt"
    ssl_p2s_cert="/etc/proxysql/ssl-internal/tls.crt"
    ssl_p2s_key="/etc/proxysql/ssl-internal/tls.key"
    ssl_p2s_cipher="ECDHE-RSA-AES128-GCM-SHA256"
  }
```

## Use a ConfigMap

You can use a configmap and the cluster restart to reset configuration options. A configmap allows Kubernetes to pass or update configuration data inside a containerized application.

Use the `kubectl` command to create the configmap from external resources, for more information see [Configure a Pod to use a ConfigMap](#).

For example, you define a `proxysql.cnf` configuration file with the following setting:

```

datadir="/var/lib/proxysql"

admin_variables =
{
  admin_credentials="proxyadmin:admin_password"
  mysql_ifaces="0.0.0.0:6032"
  refresh_interval=2000
  restapi_enabled=true
  restapi_port=6070

  cluster_username="proxyadmin"
  cluster_password="admin_password"
  cluster_check_interval_ms=200
  cluster_check_status_frequency=100
  cluster_mysql_query_rules_save_to_disk=true
  cluster_mysql_servers_save_to_disk=true
  cluster_mysql_users_save_to_disk=true
  cluster_proxysql_servers_save_to_disk=true
  cluster_mysql_query_rules_diffs_before_sync=1
  cluster_mysql_servers_diffs_before_sync=1
  cluster_mysql_users_diffs_before_sync=1
  cluster_proxysql_servers_diffs_before_sync=1
}

mysql_variables=
{
  monitor_password="monitor"
  monitor_galera_healthcheck_interval=1000
  threads=2
  max_connections=2048
  default_query_delay=0
  default_query_timeout=10000
  poll_timeout=2000
  interfaces="0.0.0.0:3306"
  default_schema="information_schema"
  stacksize=1048576
  connect_timeout_server=10000
  monitor_history=60000
  monitor_connect_interval=20000
  monitor_ping_interval=10000
  ping_timeout_server=200
  commands_stats=true
  sessions_sort=true
  have_ssl=true
  ssl_p2s_ca="/etc/proxysql/ssl-internal/ca.crt"
  ssl_p2s_cert="/etc/proxysql/ssl-internal/tls.crt"
  ssl_p2s_key="/etc/proxysql/ssl-internal/tls.key"
  ssl_p2s_cipher="ECDHE-RSA-AES128-GCM-SHA256"
}

```

You can create a configmap from the `proxysql.cnf` file with the `kubectl create configmap` command.

You should use the combination of the cluster name with the `-proxysql` suffix as the naming convention for the configmap. To find the cluster name, you can use the following command:

```
$ kubectl get pxc
```

The syntax for `kubectl create configmap` command is:

```
$ kubectl create configmap <cluster-name>-proxysql <resource-type=resource-name>
```

The following example defines `cluster1-proxysql` as the configmap name and the `proxysql.cnf` file as the data source:

```
$ kubectl create configmap cluster1-proxysql --from-file=proxysql.cnf
```

To view the created configmap, use the following command:

```
$ kubectl describe configmaps cluster1-proxysql
```

## Use a Secret Object

The Operator can also store configuration options in [Kubernetes Secrets](#). This can be useful if you need additional protection for some sensitive data.

You should create a Secret object with a specific name, composed of your cluster name and the `proxysql` suffix.

### Note

To find the cluster name, you can use the following command:

```
$ kubectl get pxc
```

Configuration options should be put inside a specific key inside of the `data` section. The name of this key is `proxysql.cnf` for ProxySQL Pods.

Actual options should be encoded with [Base64](#).

For example, let's define a `proxysql.cnf` configuration file and put there options we used in the previous example:

```
datadir="/var/lib/proxysql"

admin_variables =
{
  admin_credentials="proxyadmin:admin_password"
  mysql_ifaces="0.0.0.0:6032"
  refresh_interval=2000
  restapi_enabled=true
  restapi_port=6070

  cluster_username="proxyadmin"
  cluster_password="admin_password"
  cluster_check_interval_ms=200
  cluster_check_status_frequency=100
  cluster_mysql_query_rules_save_to_disk=true
  cluster_mysql_servers_save_to_disk=true
  cluster_mysql_users_save_to_disk=true
  cluster_proxysql_servers_save_to_disk=true
  cluster_mysql_query_rules_diffs_before_sync=1
  cluster_mysql_servers_diffs_before_sync=1
  cluster_mysql_users_diffs_before_sync=1
  cluster_proxysql_servers_diffs_before_sync=1
}

mysql_variables=
{
  monitor_password="monitor"
  monitor_galera_healthcheck_interval=1000
  threads=2
  max_connections=2048
  default_query_delay=0
  default_query_timeout=10000
  poll_timeout=2000
  interfaces="0.0.0.0:3306"
  default_schema="information_schema"
  stacksize=1048576
  connect_timeout_server=10000
  monitor_history=60000
  monitor_connect_interval=20000
  monitor_ping_interval=10000
  ping_timeout_server=200
  commands_stats=true
  sessions_sort=true
  have_ssl=true
  ssl_p2s_ca="/etc/proxysql/ssl-internal/ca.crt"
  ssl_p2s_cert="/etc/proxysql/ssl-internal/tls.crt"
  ssl_p2s_key="/etc/proxysql/ssl-internal/tls.key"
  ssl_p2s_cipher="ECDHE-RSA-AES128-GCM-SHA256"
}
```

You can get a Base64 encoded string from your options via the command line as follows:

## in Linux

```
$ cat proxysql.cnf | base64 --wrap=0
```

## in macOS

```
$ cat proxysql.cnf | base64
```

### Note

Similarly, you can read the list of options from a Base64 encoded string:

```
$ echo "ZGF0YWRpcj0iL3Zhci9saWVhcHJveHlzcWwiCgphZG1pb192YXJpYWJsZXMGpPQp7CiBhZG1pb19j\  
cmVhZG1pb192YXJpY2x1c3Rlc191c2VybWVtZT0icHJv\  
LjAuMD02MDMyIgotgcmVmcVzaF9pbmRlcnZhbD0yMDAwCgogY2x1c3Rlc191c2VybWVtZT0icHJv\  
eHlhcHJpbiIKIGNsdxN0ZXJfcGFzc3dvcmQ9ImFkbWluX3Bhc3N3b3JkIgotY2x1c3Rlc191c2VybWVtZT0icHJv\  
a19pbmRlcnZhbD0yMDAwCgogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfcHJveHlzcWwiCgphZG1pb192YXJpYWJsZXMGpPQp7CiBhZG1pb19j\  
dXN0ZXJfbXlzcWxfXVlcn1fcVnVzXNfc2F2ZV90b19kaXNrPXRydWUKIGNsdxN0ZXJfbXlzcWxf\  
c2VydmdVyc19zYXZlX3RvX2Rpc2s9dHJ1ZQogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
c2s9dHJ1ZQogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
dGVyX215c3FsX3F1ZXJ5X3J1bGVzX2RmZmZzX2JlZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
c2VydmdVyc19kaWZmc19iZWZvcVfc3luYz0xciBjbHVzdGVyX215c3FsX3VzZXJzX2RmZmZzX2Jl\  
Zm9yZV9zeW5jPTEKIGNsdxN0ZXJfcHJveHlzcWxfc2VydmdVyc19kaWZmc19iZWZvcVfc3luYz0x\  
Cn0Kcm15c3FsX3ZhcmlhYmxlc20KewogbW9uaXRvc19wYXNzd29yZD0ibW9uaXRvc19kaWZmc19iZWZvcVfc3luYz0x\  
b3JfZ2FzZXJhX2h1YX0aGNoZWNRX21udGVydmFscPTEwMDAKIHRocmVhZHM9MgogbWF4X2NvbW51\  
Y3Rpb25zPTIwNDgKIGRlZmF1bHRfcXVlcn1fcZGVsYXk9MAogZGVmYXVsdF9xdWVveV90aW11b3V0\  
PTEwMDAwCiBwb2x3X3RpbWVvdXQ9MjAwMAogZGVmYXVsdF9xdWVveV90aW11b3V0\  
YXVsdF9zY2h1bWE9Im1uZm9ybW90aW9uX3NjaGvtYSIKIH0YWNrc216ZT0xMDQ4NTc2CiBjb25u\  
ZWN0X3RpbWVvdXRfc2VydmdVycPTEwMDAwCiBtb25pdG9yX2hpc3Rvcnk9NjAwMDAKIG1vbm10b3Jf\  
Y29ubmVjdF9pbmRlcnZhbD0yMDAwMAogbW9uaXRvc19waW5nX21udGVydmFscPTEwMDAwCiBwaW5n\  
X3RpbWVvdXRfc2VydmdVycPTEwMDAwY29tbW9uZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
cnVlciBoYXZlX3NzbD10cnVlciBzc2xfcDZjX2NhPSlvcXJlL3Bib3h5c3FsL3NzbC1pbmRlcm5h\  
bC9jYS5jcnciCiBzc2xfcDZjX2NlcnQ9Ii9ldGMvcHJveHlzcWwvc3NsLW1udGVybmFscL3Rscy5j\  
cnQ1ciBzc2xfcDZjX2tleT0iL2V0Yy9wcm94eXNxbC9zc2wtaW50ZXJyYXVwdGxzLmt1eSIKIHZz\  
bF9wMnNfY21waGvYPSJFQ0RIRS1SU0EtQUVTMTI4LUdDTS1TSEYNTYiCn0K" | base64 --decode
```

Finally, use a yaml file to create the Secret object. For example, you can create a `deploy/my-proxysql-secret.yaml` file with the following contents:

```
apiVersion: v1
kind: Secret
metadata:
  name: cluster1-proxysql
data:
  proxysql.cnf: "ZGF0YWRpcj0iL3Zhci9saWVhcHJveHlzcWwiCgphZG1pb192YXJpYWJsZXMGpPQp7CiBhZG1pb19j\  
cmVhZG1pb192YXJpY2x1c3Rlc191c2VybWVtZT0icHJv\  
LjAuMD02MDMyIgotgcmVmcVzaF9pbmRlcnZhbD0yMDAwCgogY2x1c3Rlc191c2VybWVtZT0icHJv\  
eHlhcHJpbiIKIGNsdxN0ZXJfcGFzc3dvcmQ9ImFkbWluX3Bhc3N3b3JkIgotY2x1c3Rlc191c2VybWVtZT0icHJv\  
a19pbmRlcnZhbD0yMDAwCgogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfcHJveHlzcWwiCgphZG1pb192YXJpYWJsZXMGpPQp7CiBhZG1pb19j\  
dXN0ZXJfbXlzcWxfXVlcn1fcVnVzXNfc2F2ZV90b19kaXNrPXRydWUKIGNsdxN0ZXJfbXlzcWxf\  
c2VydmdVyc19zYXZlX3RvX2Rpc2s9dHJ1ZQogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
c2s9dHJ1ZQogY2x1c3Rlc191c2VybWVtZT0icHJvZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
dGVyX215c3FsX3F1ZXJ5X3J1bGVzX2RmZmZzX2JlZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
c2VydmdVyc19kaWZmc19iZWZvcVfc3luYz0xciBjbHVzdGVyX215c3FsX3VzZXJzX2RmZmZzX2Jl\  
Zm9yZV9zeW5jPTEKIGNsdxN0ZXJfcHJveHlzcWxfc2VydmdVyc19kaWZmc19iZWZvcVfc3luYz0x\  
Cn0Kcm15c3FsX3ZhcmlhYmxlc20KewogbW9uaXRvc19wYXNzd29yZD0ibW9uaXRvc19kaWZmc19iZWZvcVfc3luYz0x\  
b3JfZ2FzZXJhX2h1YX0aGNoZWNRX21udGVydmFscPTEwMDAKIHRocmVhZHM9MgogbWF4X2NvbW51\  
Y3Rpb25zPTIwNDgKIGRlZmF1bHRfcXVlcn1fcZGVsYXk9MAogZGVmYXVsdF9xdWVveV90aW11b3V0\  
PTEwMDAwCiBwb2x3X3RpbWVvdXQ9MjAwMAogZGVmYXVsdF9xdWVveV90aW11b3V0\  
YXVsdF9zY2h1bWE9Im1uZm9ybW90aW9uX3NjaGvtYSIKIH0YWNrc216ZT0xMDQ4NTc2CiBjb25u\  
ZWN0X3RpbWVvdXRfc2VydmdVycPTEwMDAwCiBtb25pdG9yX2hpc3Rvcnk9NjAwMDAKIG1vbm10b3Jf\  
Y29ubmVjdF9pbmRlcnZhbD0yMDAwMAogbW9uaXRvc19waW5nX21udGVydmFscPTEwMDAwCiBwaW5n\  
X3RpbWVvdXRfc2VydmdVycPTEwMDAwY29tbW9uZm9yZV9zeW5jPTEKIGNsdxN0ZXJfbXlzcWxf\  
cnVlciBoYXZlX3NzbD10cnVlciBzc2xfcDZjX2NhPSlvcXJlL3Bib3h5c3FsL3NzbC1pbmRlcm5h\  
bC9jYS5jcnciCiBzc2xfcDZjX2NlcnQ9Ii9ldGMvcHJveHlzcWwvc3NsLW1udGVybmFscL3Rscy5j\  
cnQ1ciBzc2xfcDZjX2tleT0iL2V0Yy9wcm94eXNxbC9zc2wtaW50ZXJyYXVwdGxzLmt1eSIKIHZz\  
bF9wMnNfY21waGvYPSJFQ0RIRS1SU0EtQUVTMTI4LUdDTS1TSEYNTYiCn0K"
```

When ready, apply it with the following command:

```
$ kubectl create -f deploy/my-proxysql-secret.yaml
```



 **Note**

Do not forget to restart Percona XtraDB Cluster to ensure the cluster has updated the configuration.

## Accessing the ProxySQL Admin Interface

You can use [ProxySQL admin interface](#) to configure its settings.

Configuring ProxySQL in this way means connecting to it using the MySQL protocol, and two things are needed to do it:

- the ProxySQL Pod name
- the ProxySQL admin password

You can find out ProxySQL Pod name with the `kubectl get pods` command, which will have the following output:

```
$ kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
cluster1-pxc-node-0                 1/1    Running   0          5m
cluster1-pxc-node-1                 1/1    Running   0          4m
cluster1-pxc-node-2                 1/1    Running   0          2m
cluster1-proxysql-0                 1/1    Running   0          5m
percona-xtradb-cluster-operator-dc67778fd-qtspz 1/1    Running   0          6m
```

The next command will print you the needed admin password:

```
$ kubectl get secrets $(kubectl get pxc -o jsonpath='{.items[].spec.secretsName}') -o template='{{ .data.proxyadmin | base64decode }}'
```

When both Pod name and admin password are known, connect to the ProxySQL as follows, substituting `cluster1-proxysql-0` with the actual Pod name and `admin_password` with the actual password:

```
$ kubectl exec -it cluster1-proxysql-0 -- mysql -h127.0.0.1 -P6032 -uproxyadmin -padmin_password
```

# **Workload transfer and disaster recovery**

# Multi-data center setup for disaster recovery

Disaster can happen at any moment. To keep your services running smoothly, you can set up two Percona XtraDB Clusters in different locations (called "sites"). You then configure multi-site replication between them. You then configure them to replicate data between each other. This makes sure both clusters have the same data and stay in sync. One site works as the primary site, and the other is a replica. It is usually in a standby mode.

If the primary site goes down, you need a way to move the workload to the backup site so that users won't notice anything.

Once the primary site is fixed, you can move the services back to it.

This guide explains how to set up a disaster recovery system and transfer workloads between sites when something goes wrong.

## Assumptions

- This guide is about two Percona XtraDB Clusters (PXC) set up with the Operator in Kubernetes. The clusters are in two separate sites which represent different Kubernetes environments.

To differentiate the clusters, let's name them:

- `cluster1` is the PXC on the primary site
- `cluster2` is the PXC on the replica site
- The primary and replica sites must be identical. The easiest way to achieve this is to make a backup on the primary site and restore it on the replica.
- We assume your applications are already set up to automatically switch to the replica site B if the primary site goes down. Setting this up is not covered in this guide.

# Set up the primary site

## Before you start

Clone the repository with all manifests and source code. You'll need it to edit configuration files for the database clusters, Secrets, backups and restores. Run the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

Make sure to clone the correct branch. The branch name is the same as the Operator release version.

## Install the Operator and PXC

1. Create a namespace.

```
$ kubectl create namespace <namespace>
```

2. Use the [Quickstart guide](#) to install the Operator and Percona XtraDB Cluster.

You now have the `cluster1` database cluster up and running.

## Export the database secrets

While on the primary site, export the Secrets object with the user credentials. Both the primary and the replica sites must have the same user credentials. This enables the Operator to restore the backup from the primary on the replica site.

1. List the Secrets objects.

```
$ kubectl get secrets -n <namespace>
```

### Expected output

|                       |                   |   |       |
|-----------------------|-------------------|---|-------|
| cluster1-secrets      | Opaque            | 6 | 5m43s |
| cluster1-ssl          | kubernetes.io/tls | 3 | 5m42s |
| cluster1-ssl-internal | kubernetes.io/tls | 3 | 5m40s |
| internal-cluster1     | Opaque            | 6 | 5m43s |

The file we are interested in is called `cluster1-secrets` where `cluster1` is the name of your cluster.

2. Export the database cluster's Secret file. You'll need it later to set up the replica site. The replica must have the same users as the primary site to replicate data from it. The following command exports the `cluster1-secrets` Secret to a `pxcsecret.yaml` file. Feel free to use your name and namespace:

```
$ kubectl get secret cluster1-secrets -n <namespace> -o yaml > pxcsecret.yaml
```

3. Edit the exported `pxcsecret.yaml` file: remove the `annotations`, `creationTimestamp`, `resourceVersion`, `selfLink`, and `uid` metadata fields.

## Create a backup from the primary site

We will use this backup to deploy the replica site.

1. Configure the backup storage. Use either the Amazon S3 / S3-compatible storage, or the Azure Blob Storage. Persistent Volumes are specific to a namespace, meaning only Pods in the same namespace can access them.

Use the [Configure storage for backups tutorial](#) for the steps.

2. [Make an on-demand backup](#) on the primary site.
3. View the information about a backup:

```
$ kubectl get pxc-backup -n <namespace>
```

 Expected output

| NAME    | CLUSTER  | STORAGE    | DESTINATION                                     | STATUS    | COMPLETED | AGE  |
|---------|----------|------------|---|-----------|-----------|------|
| backup1 | cluster1 | s3-us-west | s3://mybucket/cluster1-2025-03-18-10:55:43-full | Succeeded | 3m25s     | 4m4s |

# Set up the replica site

The replica site must be the exact copy of the primary site and must have the same system user credentials. The easiest way to achieve this is to [make a backup on the primary site](#) and restore it on the replica.

## Before you start

Clone the repository with all manifests and source code. You'll need it to edit configuration files for the database clusters, Secrets, backups and restores. Run the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

Make sure to clone the correct branch. The branch name is the same as the Operator release version.

## Procedure

Let's create `cluster2` on the replica site.

1. Create a namespace.

```
$ kubectl create namespace <namespace>
```

2. Create the Secrets object with the user credentials for the replica site. The Operator uses this Secret object when installing Percona XtraDB Cluster. As a result, the users in both sites have the same credentials. This is required to restore the backup from the main site on the replica.

Edit the `pxcsecret.yaml` file that you exported from the primary site, if you haven't done it before. Remove the `annotations`, `creationTimestamp`, `resourceVersion`, `selfLink`, and `uid` metadata fields.

You can create the replica site with the same name as the primary. In our setup we differentiate the clusters and must change the name in the Secret.

The resulting Secret file must resemble the following:

```
apiVersion: v1
kind: Secret
metadata:
  name: cluster2-secrets # Change the name if needed
type: Opaque
stringData:
  monitor: <monitor-password> # Decoded passwords here
  operator: <operator-password>
  proxyadmin: <proxyadmin-password>
  replication: <replication-password>
  root: <root-password>
  xtrabackup: <xtrabackup-password>
```

3. Create the Secret with the following command. Replace the `<namespace>` placeholder with your name:

```
$ kubectl apply -f path/to/pxcsecret.yaml -n <namespace>
```

4. Install Percona XtraDB Cluster. Edit the `deploy/cr.yaml` file and specify the following configuration:

- `metadata.name` - The name of the cluster if you want to change it. It must match the name you defined for the user Secret on step 2.

```
metadata:
  name: cluster2 # The name of your cluster if you want to change it
```

5. Run the following command to install Percona XtraDB Cluster:

```
$ kubectl apply -f deploy/cr.yaml -n <namespace>
```

It may take some time to install and initialize the cluster.

6. Check the status of the cluster:

```
$ kubectl get pxc -n <namespace>
```

#### Expected output

| NAME     | ENDPOINT                     | STATUS | PXC | PROXYSQL | HAPROXY | AGE |
|----------|------------------------------|--------|-----|----------|---------|-----|
| cluster2 | cluster2-haproxy.<namespace> | ready  | 3   |          | 3       | 36m |

## Restore the backup on the replica site

1. Create the Secret object with the credentials from the cloud storage where you made the backup to. The Operator uses the same Secret for backups and restores. For example, if you named the Secret `deploy/backup/backup-s3-secret.yaml`, run the following command to create the Secrets object on the replica site. Replace the `<namespace>` placeholder with your namespace.

```
$ kubectl apply -f deploy/backup/backup-s3-secret.yaml -n <namespace>
```

2. To restore from a backup, create a special restore configuration file. Edit the sample [deploy/backup/restore.yaml](#) file.

Specify the following information:

- `spec.pxcCluster` - the name of the cluster on the replica site.
- `spec.backupSource.destination` - the location of the backup on the backup storage. Run the `kubectl get pxc-backup -n <namespace>` on the main site to check the destination.

Specify the storage information specific to the storage you used for the backup. For S3 storage, this will be the following:

- `spec.backupSource.s3.bucket` - the name of the bucket where the backup is stored
- `spec.backupSource.s3.credentialsSecret` - the name of the Secrets object with the credentials from the backup storage that you created in step 1.
- `spec.backupSource.s3.region` - the region where the bucket is located. It must match the region that you defined in the `deploy/cr.yaml` file on when you [made a backup](#).

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster2
  backupSource:
    destination: s3://mybucket/cluster1-2025-03-18-10:55:43-full
    s3:
      bucket: mybucket
      credentialsSecret: my-cluster-name-backup-s3
      region: us-west-2
```

3. Run the following command to start a restore:

```
$ kubectl apply -f deploy/backup/restore.yaml -n <namespace>
```

4. Check the cluster status to see if the restore was successful:

```
$ kubectl get pxc -n <namespace>
```

#### Expected output

| NAME     | ENDPOINT                     | STATUS | PXC | PROXYSQL | HAPROXY | AGE |
|----------|------------------------------|--------|-----|----------|---------|-----|
| cluster2 | cluster2-haproxy.<namespace> | ready  | 3   |          | 3       | 36m |

# Configure replication between the sites

The sites must have the same copy of data. To do so, configure the replication between them so that sites are always in sync. The replication is defined via a replication channel where you specify which site is the source of data and which site receives it.

## Prepare the primary site

Your replica site needs to connect to your primary site to replicate data from it. For this, each database Pod on the primary site must have an external IP addresses to be reached directly. This is done by exposing the database cluster Pods using the LoadBalancer service type. Read more about [exposing a cluster](#).

1. Since the primary site is already running, we will patch its configuration with the following command. Replace the `<namespace>` placeholder with your namespace:

```
$ kubectl patch pxc cluster1 -n <namespace> --type=merge --patch '{
  "spec": {
    "pxc": {
      "expose": {
        "enabled": true,
        "type": "LoadBalancer"
      }
    }
  }
}'
```

2. Configure the replication channel on the primary site. Specify the following Custom Resource options in the `spec.pxc.replicationChannels` subsection in the `deploy/cr.yaml` file:

- `pxc.replicationChannels.[].name` is the name of the channel,
- `pxc.replicationChannels.[].isSource` defines what cluster the data is replicated from. Set the value to `true`.

Run the following command to add this configuration:

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
  "spec": {
    "pxc": {
      "replicationChannels": [
        {
          "name": "pxc1_to_pxc2",
          "isSource": true
        }
      ]
    }
  }
}'
```

3. Check that the Pods are exposed by listing the services:

```
$ kubectl get services -n <namespace>
```

### Expected output

| NAME           | TYPE         | CLUSTER-IP     | EXTERNAL-IP    | PORT(S)        |      |
|----------------|--------------|----------------|----------------|----------------|------|
| cluster1-pxc-0 | LoadBalancer | 34.118.227.242 | 104.197.82.173 | 3306:32522/TCP | 7m5s |
| cluster1-pxc-1 | LoadBalancer | 34.118.236.108 | 34.44.97.95    | 3306:32361/TCP | 7m5s |
| cluster1-pxc-2 | LoadBalancer | 34.118.236.170 | 35.222.208.249 | 3306:31607/TCP |      |

Store the public IP addresses of your Pods. You will need them during the replica site setup.

## Prepare the replica site

Configure the replication channel on the replica site. Specify the following Custom Resource options in the `spec.pxc.replicationChannels` subsection in the `deploy/cr.yaml` file:

- `spec.pxc.replicationChannels` - The replication channel configuration. The name of the channel must match the name on the primary site.



- `spec.pxc.replicationChannels[].isSource` - Set the value to `false` to indicate that the replica site is not the source of the data.
- `spec.pxc.replicationChannels[].sourcesList` - The list of sources. Specify the external IP addresses of the database Pods from the primary site.

Run the following command to apply a patch to the replica site's configuration with the required information. Don't forget to replace the `<placeholders>` with your values:

```
$ kubectl patch pxc cluster1 -n <namespace> --type=merge --patch '{
"spec": {
  "pxc": {
    "replicationChannels": [
      {
        "name": "pxc1_to_pxc2",
        "isSource": false,
        "sourcesList": [
          { "host": "34.118.227.242", "port": 3306, "weight": 100 },
          { "host": "34.118.227.242", "port": 3306, "weight": 100 },
          { "host": "34.118.227.242", "port": 3306, "weight": 100 }
        ]
      }
    ]
  }
}
```

## Verify the replication

To verify that the replication is working, do the following:

1. [Connect to Percona XtraDB Cluster](#) on the primary site.
2. Create a database and a table.

```
mysql> CREATE DATABASE demo;
```

### Expected output

```
Query OK, 1 row affected (0.02 sec)
```

```
mysql> CREATE TABLE demo.users(user_id INT PRIMARY KEY, user_name VARCHAR(30));
```

### Expected output

```
Query OK, 0 rows affected (0.03 sec)
```

3. Insert some data into the database:

```
mysql> INSERT INTO demo.users VALUES (1, 'percona');
```

4. [Connect to Percona XtraDB Cluster](#) on the replica site.

5. Retrieve the data from the database:

```
mysql> SELECT * FROM demo.users;
```

Expected output

```
+-----+-----+
| user_id | user_name |
+-----+-----+
|      1 | percona  |
+-----+-----+
1 row in set (0.00 sec)
```

# Promote the replica site to a new primary

Let's say the primary site with `cluster1` is down. The client applications have automatically switched to the replica site. Now you need to reconfigure your setup to make `cluster2` on the replica site a new primary and have it handle the load.

Here's how to do it:

1. Modify the replication channel for `cluster2` within the `deploy/cr.yaml` file:

- Set the `isSource` value to `true` to make the replica site the source of the data.
- Remove the `sourcesList` configuration.

Run the following command to apply a patch configuration to `cluster2`.

```
$ kubectl patch pxc cluster2 -n <namespace> --type=merge --patch '{
  "spec": {
    "pxc": {
      "replicationChannels": [
        {
          "name": "pxc1_to_pxc2",
          "isSource": true
        }
      ]
    }
  }
}'
```

Now `cluster2` acts as the primary site.

2. While the old primary site is unavailable, `cluster1` no longer has up-to-date data. So you can delete it. Refer to the [Delete the database cluster](#) tutorial for the steps how to do it.

# Restore the previous primary site

Let's say the root of the outage is no longer present. You can now install a new database cluster on this site. Let's use the previous name `cluster1` for it.

## Install a new database cluster on the previous primary site

The new `cluster1` must be the exact copy of the current primary `cluster2`. We will use the same approach as we did when creating `cluster2`: make a backup from `cluster2` and restore it on `cluster1`.

The steps are the following:

1. Create the namespace
2. If you deleted the Operator, install it. Use the [Quickstart](#) for the steps.
3. Prepare the Secrets file with the user credentials for `cluster1`. The users on both sites must have the same credentials.

You can reuse the `pxcsecret.yaml` secrets file or create a new one. Make sure that the passwords in this file match the passwords from the `cluster2-secrets` Secrets object. Check the [Export the database secrets](#) section to refresh your memory how to find the required Secrets object.

Edit the `pxcsecret.yaml` file and change the name of the cluster to `cluster1`.

```
apiVersion: v1
kind: Secret
metadata:
  name: cluster1-secrets # The name of the cluster to-be-installed
type: Opaque
stringData:
  monitor: <monitor-password> # Decoded passwords here
  operator: <operator-password>
  proxyadmin: <proxyadmin-password>
  replication: <replication-password>
  root: <root-password>
  xtrabackup: <xtrabackup-password>
```

4. Create the Secrets object:

```
$ kubectl apply -f path/to/pxcsecret.yaml -n <namespace>
```

5. Install Percona XtraDB Cluster with the `cluster1` name and the default parameters:

```
$ kubectl apply -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cr.yaml -n <namespace>
```

6. Check the status of the cluster:

```
$ kubectl get pxc -n <namespace>
```

### Expected output

| NAME     | ENDPOINT                     | STATUS | PXC | PROXYSQL | HAPROXY | AGE |
|----------|------------------------------|--------|-----|----------|---------|-----|
| cluster1 | cluster1-haproxy.<namespace> | ready  | 3   |          | 3       | 3m  |

## Make a backup on the current primary site

1. Make a backup on the current primary `cluster2`. See the [Create a backup from the primary site](#) section for the steps.

#### Expected output

| NAME    | CLUSTER  | STORAGE    | DESTINATION                                     | STATUS    | COMPLETED | AGE  |
|---------|----------|------------|---|-----------|-----------|------|
| backup1 | cluster2 | s3-us-west | s3://mybucket/cluster2-2025-03-21-12:05:37-full | Succeeded | 2m55s     | 6m6s |

## Restore the backup on a new database cluster

1. Restore the backup from `cluster2` on `cluster1`. Change the `deploy/backup/restore.yaml` file as follows:

- Change the `pxcCluster` name to `cluster1`. This is where you make the restore.
- Change the `backupSource.destination` to the location of the backup on the backup storage. Run the `kubectl get pxc-backup -n <namespace>` on `cluster2` (the current primary) to check the destination.

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster1
  backupSource:
    destination: s3://mybucket/cluster2-2025-03-21-12:05:37-full
    s3:
      bucket: mybucket
      credentialsSecret: my-cluster-name-backup-s3
      region: us-west-2
```

2. Start the restore with the following command:

```
$ kubectl apply -f deploy/backup/restore.yaml -n <namespace>
```

3. Check the status of the cluster:

```
$ kubectl get pxc -n <namespace>
```

The cluster should report the Ready status.

## Promote the new database cluster as the primary

The newly deployed site with `cluster1` is now the working copy of the current primary `cluster2`. It's time to configure it back as the primary site.

To do this, configure the replication channels on both sites. Refer to the [Configure replication between the sites](#) section for the steps.

# Transport Layer Security (TLS)

The Percona Operator for MySQL uses Transport Layer Security (TLS) cryptographic protocol for the following types of communication:

- Internal - communication between Percona XtraDB Cluster instances,
- External - communication between the client application and ProxySQL.

The internal certificate is also used as an authorization method.

TLS security can be configured in several ways:

- The Operator generates long-term certificates automatically if there are no certificate secrets available (default option, and requires you renew them manually),
- The Operator can use a specifically installed *cert-manager*, which will automatically generate and renew short-term TLS certificates,
- Certificates can be generated manually.

You can also use pre-generated certificates available in the `deploy/ssl-secrets.yaml` file for test purposes, but we strongly recommend avoiding their usage on any production system!

The following subsections explain how to configure TLS security with the Operator yourself, as well as how to temporarily disable it if needed.

## Install and use the *cert-manager*

### About the *cert-manager*

A [cert-manager](#) is a Kubernetes certificate management controller which is widely used to automate the management and issuance of TLS certificates. It is community-driven, and open source.

When you have already installed *cert-manager* and deploy the operator, the operator requests a certificate from the *cert-manager*. The *cert-manager* acts as a self-signed issuer and generates certificates. The Percona Operator self-signed issuer is local to the operator namespace. This self-signed issuer is created because Percona XtraDB Cluster requires all certificates issued by the same .

Self-signed issuer allows you to deploy and use the Percona Operator without creating a clusterissuer separately.

### Installation of the *cert-manager*

The steps to install the *cert-manager* are the following:

- Create a namespace,
- Disable resource validations on the cert-manager namespace,
- Install the cert-manager.

The following commands perform all the needed actions:

```
$ kubectl create namespace cert-manager
$ kubectl label namespace cert-manager certmanager.k8s.io/disable-validation=true
$ kubectl apply -f https://github.com/cert-manager/cert-manager/releases/download/v1.17.1/cert-manager.yaml
```

After the installation, you can verify the *cert-manager* by running the following command:

```
$ kubectl get pods -n cert-manager
```

The result should display the *cert-manager* and webhook active and running.

## Generate certificates manually

To generate certificates manually, follow these steps:

1. Provision a Certificate Authority (CA) to generate TLS certificates
2. Generate a CA key and certificate file with the server details
3. Create the server TLS certificates using the CA keys, certs, and server details

The set of commands generate certificates with the following attributes:

- `Server.pem` - Certificate
- `Server-key.pem` - the private key
- `ca.pem` - Certificate Authority

You should generate certificates twice: one set is for external communications, and another set is for internal ones. A secret created for the external use must be added to `cr.yaml/spec/sslSecretName`. A certificate generated for internal communications must be added to the `cr.yaml/spec/sslInternalSecretName`.

```
$ cat <<EOF | cfssl gencert -initca - | cfssljson -bare ca
{
  "CN": "Root CA",
  "key": {
    "algo": "rsa",
    "size": 2048
  }
}
EOF


$ cat <<EOF | cfssl gencert -ca=ca.pem -ca-key=ca-key.pem - | cfssljson -bare server
{
  "hosts": [
    "${CLUSTER_NAME}-proxysql",
    "*.${CLUSTER_NAME}-proxysql-unready",
    "*.${CLUSTER_NAME}-pxc"
  ],
  "CN": "${CLUSTER_NAME}-pxc",
  "key": {
    "algo": "rsa",
    "size": 2048
  }
}
EOF

$ kubectl create secret generic cluster1-ssl --from-file=tls.crt=server.pem --
from-file=tls.key=server-key.pem --from-file=ca.crt=ca.pem --
type=kubernetes.io/tls
```

## Update certificates

If a cert-manager is used, it should take care of updating the certificates. If you generate certificates manually, you should take care of updating them in proper time.

TLS certificates issued by cert-manager are short-term ones. Starting from the Operator version 1.9.0 cert-manager issues TLS certificates for 3 months, while root certificate is valid for 3 years. This allows to reissue TLS certificates automatically on schedule and without downtime.

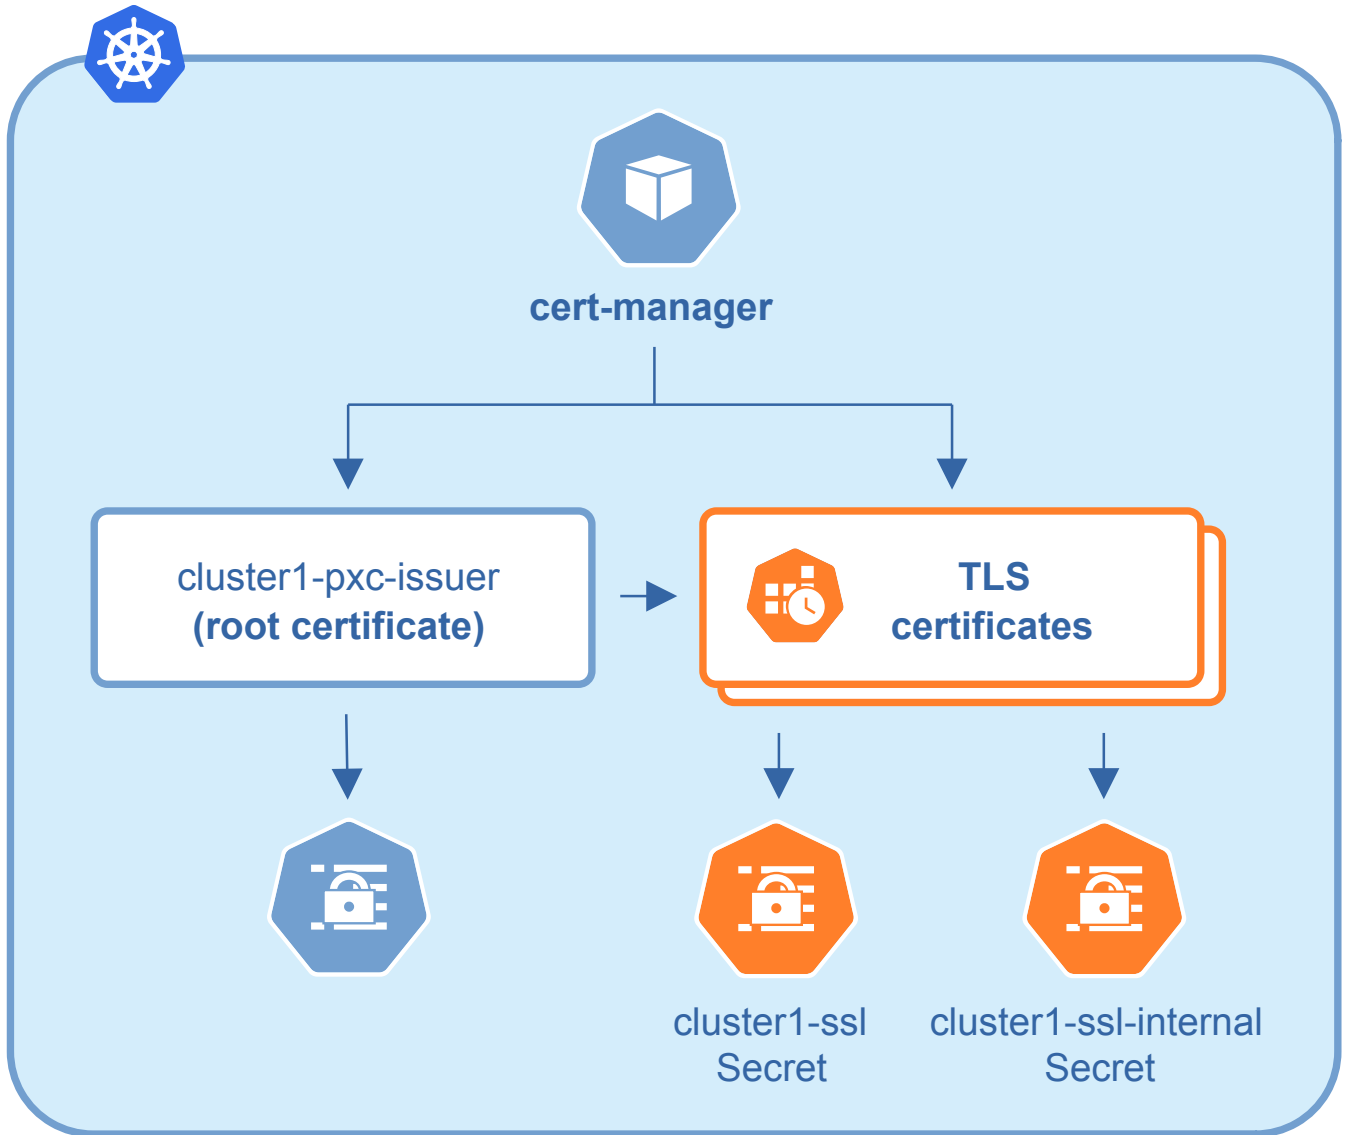

Versions of the Operator prior 1.9.0 have used 3 month root certificate, which caused issues with the automatic TLS certificates update. If that's your case, you can make the Operator update along with the [official instruction](#).

**Note**

If you use the cert-manager version earlier than 1.9.0, and you would like to avoid downtime while updating the certificates after the Operator update to 1.9.0 or newer version, force the certificates regeneration by a cert-manager.

### Check your certificates for expiration

1. First, check the necessary secrets names (`cluster1-ssl` and `cluster1-ssl-internal` by default):

```
$ kubectl get certificate
```

You will have the following response:

| NAME                  | READY | SECRET                | AGE |
|-----------------------|-------|-----------------------|-----|
| cluster1-ca-cert      | True  | cluster1-ca-cert      | 49m |
| cluster1-ssl          | True  | cluster1-ssl          | 49m |
| cluster1-ssl-internal | True  | cluster1-ssl-internal | 49m |

2. Optionally you can also check that the certificates issuer is up and running:



```
$ kubectl get issuer
```

The response should be as follows:

| NAME                   | READY | AGE |
|------------------------|-------|-----|
| cluster1-pxc-ca-issuer | True  | 49m |
| cluster1-pxc-issuer    | True  | 49m |

3. Now use the following command to find out the certificates validity dates, substituting Secrets names if necessary:

```
$ {  
  kubectl get secret/cluster1-ssl-internal -o jsonpath='{.data.tls.crt}' | base64 --decode | openssl x509 -inform pem -  
  noout -text | grep "Not After"  
  kubectl get secret/cluster1-ssl -o jsonpath='{.data.ca.crt}' | base64 --decode | openssl x509 -inform pem -noout -  
  text | grep "Not After"  
}
```

The resulting output will be self-explanatory:

```
Not After : Sep 15 11:04:53 2021 GMT  
Not After : Sep 15 11:04:53 2021 GMT
```

## Update certificates without downtime

If you don't use cert-manager and have *created certificates manually*, you can follow the next steps to perform a no-downtime update of these certificates *if they are still valid*.

### Note

For already expired certificates, follow the alternative way.

Having non-expired certificates, you can roll out new certificates (both CA and TLS) with the Operator as follows.

1. Generate a new CA certificate (`ca.pem`). Optionally you can also generate a new TLS certificate and a key for it, but those can be generated later on step 6.
2. Get the current CA (`ca.pem.old`) and TLS (`tls.pem.old`) certificates and the TLS certificate key (`tls.key.old`):

```
$ kubectl get secret/cluster1-ssl-internal -o jsonpath='{.data.ca.crt}' | base64 --decode > ca.pem.old  
$ kubectl get secret/cluster1-ssl-internal -o jsonpath='{.data.tls.crt}' | base64 --decode > tls.pem.old  
$ kubectl get secret/cluster1-ssl-internal -o jsonpath='{.data.tls.key}' | base64 --decode > tls.key.old
```

3. Combine new and current `ca.pem` into a `ca.pem.combined` file:

```
$ cat ca.pem ca.pem.old >> ca.pem.combined
```

4. Create a new Secrets object with *old* TLS certificate (`tls.pem.old`) and key (`tls.key.old`), but a *new combined* `ca.pem` (`ca.pem.combined`):

```
$ kubectl delete secret/cluster1-ssl-internal  
$ kubectl create secret generic cluster1-ssl-internal --from-file=tls.crt=tls.pem.old --from-file=tls.key=tls.key.old --  
from-file=ca.crt=ca.pem.combined --type=kubernetes.io/tls
```

5. The cluster will go through a rolling reconciliation, but it will do it without problems, as every node has old TLS certificate/key, and both new and old CA certificates.
6. If new TLS certificate and key weren't generated on step 1, do that now.
7. Create a new Secrets object for the second time: use new TLS certificate (`server.pem` in the example) and its key (`server-key.pem`), and again the combined CA certificate (`ca.pem.combined`):

```
$ kubectl delete secret/cluster1-ssl-internal  
$ kubectl create secret generic cluster1-ssl-internal --from-file=tls.crt=server.pem --from-file=tls.key=server-key.pem  
--from-file=ca.crt=ca.pem.combined --type=kubernetes.io/tls
```

- The cluster will go through a rolling reconciliation, but it will do it without problems, as every node already has a new CA certificate (as a part of the combined CA certificate), and can successfully allow joiners with new TLS certificate to join. Joiner node also has a combined CA certificate, so it can authenticate against older TLS certificate.
- Create a final Secrets object: use new TLS certificate (`server.pem`) and its key (`server-key.pem`), and just the new CA certificate (`ca.pem`):

```
$ kubectl delete secret/cluster1-ssl-internal
$ kubectl create secret generic cluster1-ssl-internal --from-file=tls.crt=server.pem --from-file=tls.key=server-key.pem
--from-file=ca.crt=ca.pem --type=kubernetes.io/tls
```

- The cluster will go through a rolling reconciliation, but it will do it without problems: the old CA certificate is removed, and every node is already using new TLS certificate and no nodes rely on the old CA certificate any more.

## Update certificates with downtime

If your certificates have been already expired (or if you continue to use the Operator version prior to 1.9.0), you should move through the *pause - update Secrets - unpause* route as follows.

- Pause the cluster [in a standard way](#), and make sure it has reached its paused state.
- If cert-manager is used, delete issuer and TLS certificates:

```
$ {
  kubectl delete issuer/cluster1-pxc-ca
  kubectl delete certificate/cluster1-ssl certificate/cluster1-ssl-internal
}
```

- Delete Secrets to force the SSL reconciliation:

```
$ kubectl delete secret/cluster1-ssl secret/cluster1-ssl-internal
```

- Check certificates to make sure reconciliation have succeeded.
- Unpause the cluster [in a standard way](#), and make sure it has reached its running state.

## Keep certificates after deleting the cluster

In case of cluster deletion, objects, created for SSL (Secret, certificate, and issuer) are not deleted by default.

If the user wants the cleanup of objects created for SSL, there is a [finalizers.delete-ssl](#) option in `deploy/cr.yaml`: if this finalizer is set, the Operator will delete Secret, certificate and issuer after the cluster deletion event.

## Run Percona XtraDB Cluster without TLS

Omitting TLS is also possible, but we recommend that you run your cluster with the TLS protocol enabled.

To have TLS protocol disabled (e.g. for demonstration purposes) set the `unsafeFlags.tls` key to `true` and set the `tls.enabled` key to `false` in the `deploy/cr.yaml` file:

```
...
spec:
  ...
  unsafeFlags
    tls: true
  ...
  tls:
    enabled: false
```

## Enabling or disabling TLS on a running cluster

You can set `tls.enabled` Custom Resource option to `true` or `false` to enable or disable TLS. However, doing this on a running cluster results in downtime and has the following side effects.

When the cluster is already running and the user switches `tls.enabled` to `false`, the Operator [pauses the cluster](#), waits until all Pods are deleted, sets `unsafeFlags.tls` Custom Resource option to `true`, deletes TLS secrets, and [unpauses the cluster](#).

Similarly, when the user switches `tls.enabled` to `true`, the Operator [pauses the cluster](#), waits until all Pods are deleted, sets `unsafeFlags.tls` Custom Resource option to `false`, and [unpauses the cluster](#).

 **Warning**

Don't change `tls.enabled` Custom Resource option when the cluster is in the process of enabling or disabling TLS: changing its value will immediately unpause the cluster even though the process has not yet completed.

# Data at Rest Encryption

Full [data at rest encryption in Percona XtraDB Cluster](#) is supported by the Operator since version 1.4.0.

## Note

[Data at rest](#) means inactive data stored as files, database records, etc.

To implement these features, the Operator uses `keyring_vault` plugin, which ships with Percona XtraDB Cluster, and utilizes [HashiCorp Vault](#) storage for encryption keys.

## Installing Vault

The following steps will deploy Vault on Kubernetes with the [Helm 3 package manager](#). Other Vault installation methods should also work, so the instruction placed here is not obligatory and is for illustration purposes. Read more about installation in Vault's [documentation](#).

1. Add helm repo and install:

```
$ helm repo add hashicorp https://helm.releases.hashicorp.com
"hashicorp" has been added to your repositories

$ helm install vault hashicorp/vault
```

2. After the installation, Vault should be first initialized and then unsealed. Initializing Vault is done with the following commands:

```
$ kubectl exec -it pod/vault-0 -- vault operator init -key-shares=1 -key-threshold=1 -format=json > /tmp/vault-init
$ unsealKey=$(jq -r ".unseal_keys_b64[]" < /tmp/vault-init)
```

To unseal Vault, execute the following command **for each Pod** of Vault running:

```
$ kubectl exec -it pod/vault-0 -- vault operator unseal "$unsealKey"
```

## Configuring Vault

1. First, you should enable secrets within Vault. For this you will need a [Vault token](#). Percona XtraDB Cluster can use any regular token which allows all operations inside the secrets mount point. In the following example we are using the *root token* to be sure the permissions requirement is met, but actually there is no need in root permissions. We don't recommend using the root token on the production system.

```
$ cat /tmp/vault-init | jq -r ".root_token"
```

The output will be like follows:

```
s.VgQvaX18xGF01RUxAPbPbsfN
```

Now login to Vault with this token and enable the "pxc-secret" secrets path:

```
$ kubectl exec -it vault-0 -- /bin/sh
$ vault login s.VgQvaX18xGF01RUxAPbPbsfN
$ vault secrets enable --version=1 -path=pxc-secret kv
```

## Note

You can also enable audit, which is not mandatory, but useful:

```
$ vault audit enable file file_path=/vault/vault-audit.log
```

2. To enable Vault secret within Kubernetes, create and apply the YAML file, as described further.

a. To access the Vault server via HTTP, follow the next YAML file example:

```
apiVersion: v1
kind: Secret
metadata:
  name: some-name-vault
type: Opaque
stringData:
  keyring_vault.conf: |-
    token = s.VgQvaXl8xGF01RUxAPbPbsfN
    vault_url = http://vault-service.vault-service.svc.cluster.local:8200
    secret_mount_point = pxc-secret
```

**Note**

the `name` key in the above file should be equal to the `spec.vaultSecretName` key from the `deploy/cr.yaml` configuration file.

b. To turn on TLS and access the Vault server via HTTPS, you should do two more things:

- add one more item to the secret: the contents of the `ca.cert` file with your certificate,
- store the path to this file in the `vault_ca` key.

```
apiVersion: v1
kind: Secret
metadata:
  name: some-name-vault
type: Opaque
stringData:
  keyring_vault.conf: |-
    token = s.VgQvaXl8xGF01RUxAPbPbsfN
    vault_url = https://vault-service.vault-service.svc.cluster.local:8200
    secret_mount_point = pxc-secret
    vault_ca = /etc/mysql/vault-keyring-secret/ca.cert
  ca.cert: |-
    -----BEGIN CERTIFICATE-----
    MIIEcZCCA1ugAwIBAgIBADANBgkqhkiG9w0BAQFAD..AKGA1UEBhMCR0Ix
    EzARBgNVBAgTC1NvbWUtU3RhdGUxFTASBgNVBAoTC0..0EgTHRkMTcwNQYD
    7vQMfXdGsRrXNGRGnX+vWDZ3/zWI0joDtCkNnqEpVn..HoX
    -----END CERTIFICATE-----
```

**Note**

the `name` key in the above file should be equal to the `spec.vaultSecretName` key from the `deploy/cr.yaml` configuration file.

**Note**

For technical reasons the `vault_ca` key should either exist or not exist in the YAML file; commented option like `#vault_ca = ...` is not acceptable.

More details on how to install and configure Vault can be found [in the official documentation](#).

## Using the encryption


If using *Percona XtraDB Cluster 5.7*, you should turn encryption on explicitly when you create a table or a tablespace. This can be done by adding the `ENCRYPTION='Y'` part to your SQL statement, like in the following example:

```
CREATE TABLE t1 (c1 INT, PRIMARY KEY pk(c1)) ENCRYPTION='Y';
CREATE TABLESPACE foo ADD DATAFILE 'foo.ibd' ENCRYPTION='Y';
```

**Note**

See more details on encryption in Percona XtraDB Cluster 5.7 [here](#).

If using *Percona XtraDB Cluster 8.0*, the encryption is turned on by default (in case if Vault is configured).

The following table presents the default values of the [correspondent my.cnf configuration options](#) :

| Option  | Default value   |
|---|---|
| <code>early-plugin-load</code>                              | <code>keyring_vault.so</code>                                   |
| <code>keyring_vault_config</code>                           | <code>/etc/mysql/vault-keyring-secret/keyring_vault.conf</code> |
| <code>default_table_encryption</code>                       | <code>ON</code>   |
| <code>table_encryption_privilege_check</code>               | <code>ON</code>   |
| <code>innodb_undo_log_encrypt</code>                        | <code>ON</code>   |
| <code>innodb_redo_log_encrypt</code>                        | <code>ON</code>   |
| <code>binlog_encryption</code>                              | <code>ON</code>   |
| <code>binlog_rotate_encryption_master_key_at_startup</code> | <code>ON</code>   |
| <code>innodb_temp_tablespace_encrypt</code>                 | <code>ON</code>   |
| <code>innodb_parallel_dblwr_encrypt</code>                  | <code>ON</code>   |
| <code>innodb_encrypt_online_alter_logs</code>               | <code>ON</code>   |
| <code>encrypt_tmp_files</code>                              | <code>ON</code>   |

# Telemetry

The Telemetry function enables the Operator gathering and sending basic anonymous data to Percona, which helps us to determine where to focus the development and what is the uptake for each release of Operator.

The following information is gathered:

- ID of the Custom Resource (the `metadata.uid` field)
- Kubernetes version
- Platform (is it Kubernetes or Openshift)
- PMM Version
- Operator version
- Percona XtraDB Cluster version
- HAProxy version
- ProxySQL version
- Percona XtraBackup version
- Is Operator deployed in a cluster-wide mode

We do not gather anything that identify a system, but the following thing should be mentioned: Custom Resource ID is a unique ID generated by Kubernetes for each Custom Resource.

Telemetry is enabled by default and is sent to the [Version Service server](#) when the Operator connects to it at scheduled times to obtain fresh information about version numbers and valid image paths needed for the upgrade.

The landing page for this service, [check.percona.com](https://check.percona.com) [↗](#), explains what this service is.

You can disable telemetry with a special option when installing the Operator:

- if you [install the Operator with helm](#), use the following installation command:

```
$ helm install my-db percona/pxc-db --version 1.17.0 --namespace my-namespace --set disable_telemetry="true"
```

- if you don't use helm for installation, you have to edit the `operator.yaml` before applying it with the `kubectl apply -f deploy/operator.yaml` command. Open the `operator.yaml` file with your text editor, find the value of the `DISABLE_TELEMETRY` environment variable and set it to `true`:

```
env:  
  ...  
  - name: DISABLE_TELEMETRY  
    value: "true"  
  ...
```

# Management



## **Backup and restore**

# Providing Backups

It's important to back up your database to keep your data safe. Backups help protect your system against data loss and corruption and ensure business stability. They are also a quick way to recover the database if something happens with it.

A backup starts after you create a Backup object. You can create a Backup object in two ways:


- manually at any moment. This way you start an [on-demand backup](#).
- instruct the Operator to create it automatically according to a schedule that you define for it. This is a [scheduled backup](#).

The Operator does physical backups using the [Percona XtraBackup](#) tool and the [SST](#) method.


## Backup storage

You can store backups outside of Kubernetes cluster in one of the supported cloud storages:

- [Amazon S3 or S3-compatible storage](#),
- [Azure Blob Storage](#):

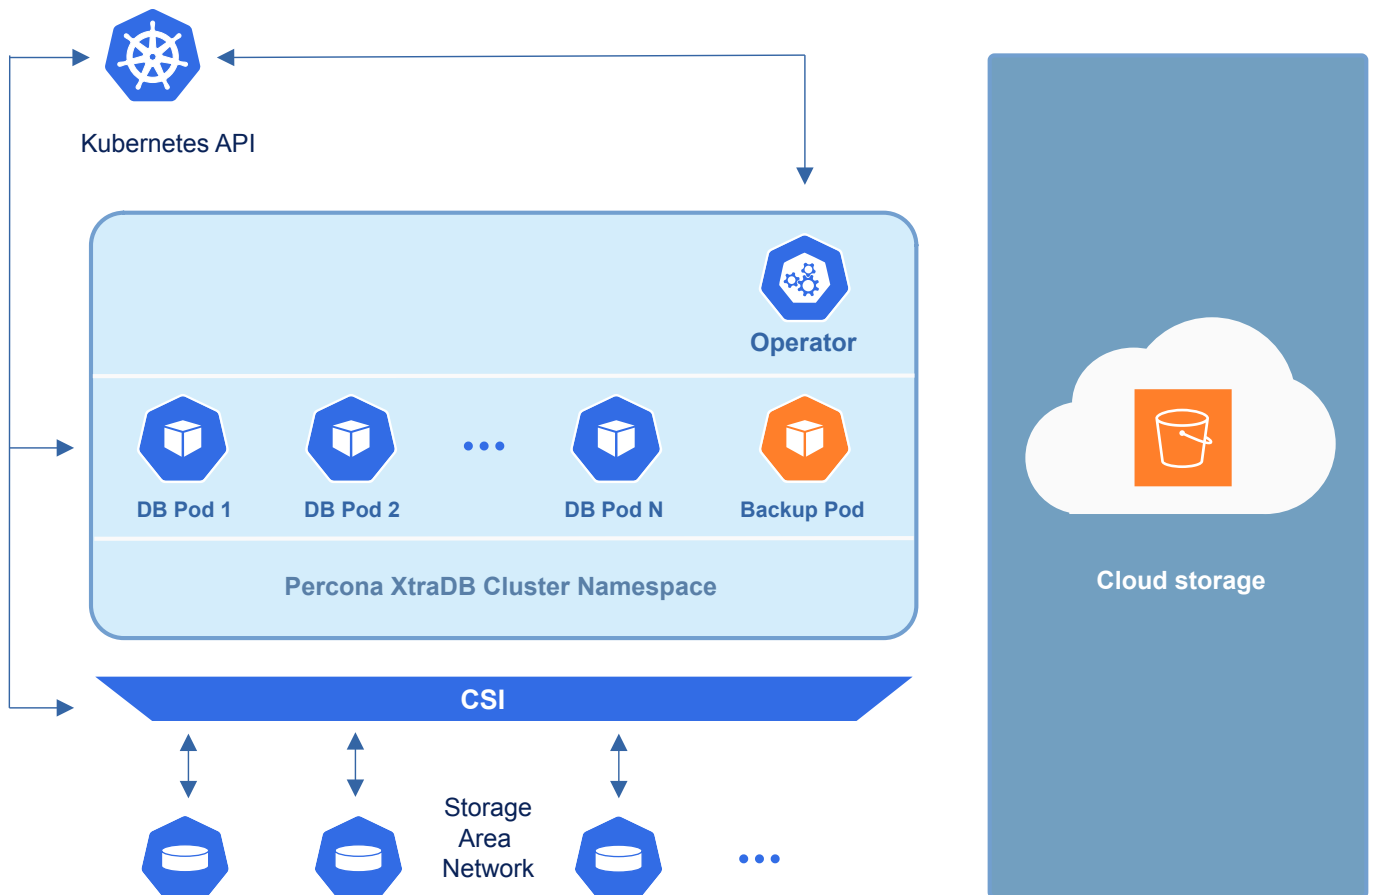

If you're running a Kubernetes cluster on premises, you can store backups inside it using a [Persistent Volume](#). For example, if you don't use a remote backup storage or if storage costs are high for you.

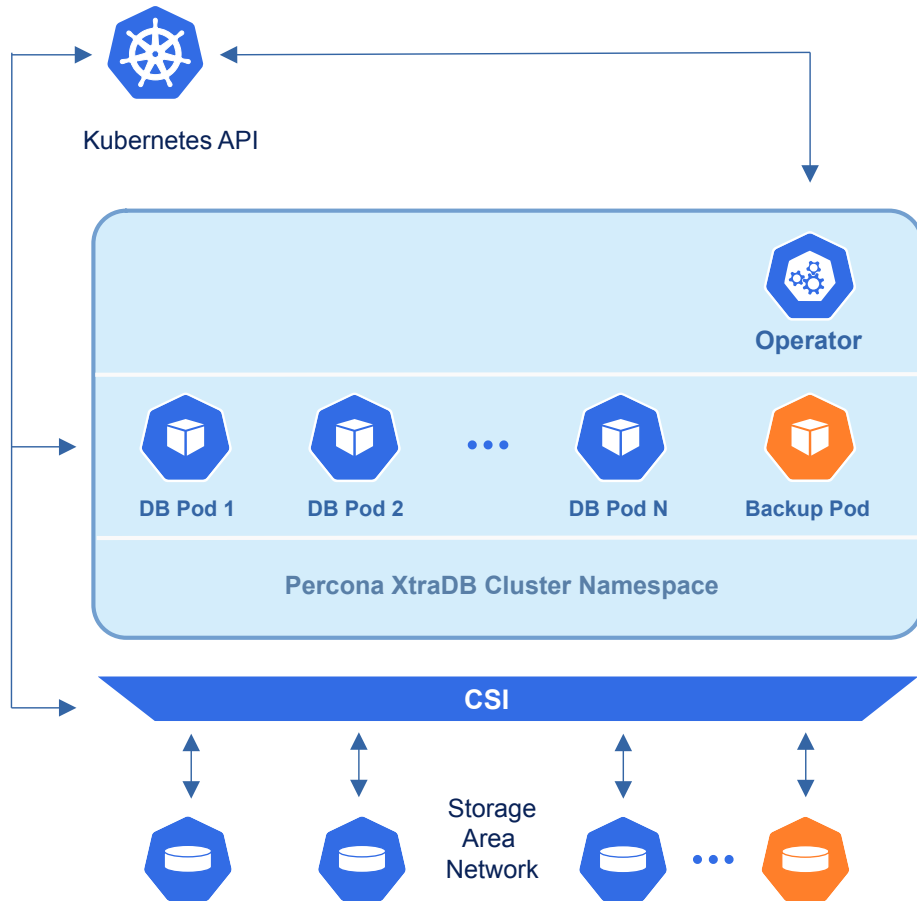

## Workflow

After you create a Backup object, the Operator sets up a backup Pod that runs Percona XtraBackup inside. It also creates a path in the storage to save the backup data.

The backup Pod starts copying the data files from the Percona XtraDB Cluster to the backup storage. The Percona XtraDB Cluster Pod that serves the data enters the Donor state and stops receiving all requests.

The backup task is resource-consuming and can affect performance. That's why the Operator uses one of the secondary Percona XtraDB Cluster Pods for backups. The exception is a one-pod deployment, where the same Pod is used for all tasks.

After the data files are copied, the Operator marks the backup Pod as 'Completed' and deletes it. The Operator also updates the status of the Backup object.

## Multiple backups

You can run several backups. For example, schedule weekly backups on one storage and daily backups on another one. You can also run an on-demand backup to be on the safe side before you do some maintenance work.

Several backups run in parallel by default if they happen at the same time. If they overload your cluster, you can turn off parallel backups with the `backup.allowParallel` configuration option in the `cr.yaml` file. Then, the Operator queues the backups and runs them sequentially.

The Operator ensures the sequence by creating a lock for a running backup. It releases the lock after the backup either succeeds or fails and starts the next one from the queue. The lock is also released if you delete a running backup.

You can fine-tune the queue by assigning a waiting time for a backup to start. Use the `spec.startingDeadlineSeconds` option in the `deploy/cr.yaml` file to set this time for all backups. You can also override it for a specific on-demand backup by defining the `startingDeadlineSeconds` option within the backup configuration. This setting has a higher priority.

If the backup doesn't start within the defined time, the Operator automatically marks it as "failed".

## Backup suspension for an unhealthy database cluster

Your database cluster can become unhealthy. For example, when one of the Pods crashes and restarts. The Operator monitors the database cluster state while a backup is running and suspends it for an unhealthy cluster to reduce the load on the cluster.

To offload the database cluster even more, you can define how long a backup remains suspended. Use the `spec.backup.suspendedDeadlineSeconds` option in the `cr.yaml` file for all backups. Or set it in the `backup.yaml` configuration files for a specific backup. The setting in the `backup.yaml` file has a higher priority.

After this duration expires, the Operator automatically marks this backup as “failed”.


Otherwise, after the cluster is recovered and reports the Ready status, the Operator resumes the backup and tries to finish it.

Note that if some files were already saved on the storage when a backup was suspended, the Operator deletes them and reruns the backup.

If you want to run backups in an unhealthy cluster, set the `spec.unsafeFlags.backupIfUnhealthy` option in the `deply/cr.yaml` file to `true`. Use this option with caution because it can affect the cluster performance.

## Configure storage for backups

You can configure storage for backups in the `backup.storages` subsection of the Custom Resource, using the [deploy/cr.yaml](#)  configuration file.

You should also create the [Kubernetes Secret](#)  object with credentials needed to access the storage.

## Amazon S3 or S3-compatible storage

1. To store backups on the Amazon S3, you need to create a Secret with the following values:

- the `metadata.name` key is the name which you will further use to refer your Kubernetes Secret,
- the `data.AWS_ACCESS_KEY_ID` and `data.AWS_SECRET_ACCESS_KEY` keys are base64-encoded credentials used to access the storage (obviously these keys should contain proper values to make the access possible).

Create the Secrets file with these base64-encoded keys following the [deploy/backup/backup-secret-s3.yaml](#) [example](#):

```
apiVersion: v1
kind: Secret
metadata:
  name: my-cluster-name-backup-s3
type: Opaque
data:
  AWS_ACCESS_KEY_ID: UkVQTEFDRS1XSVRILUFxUy1BQ0NFU1MtS0VZ
  AWS_SECRET_ACCESS_KEY: UkVQTEFDRS1XSVRILUFxUy1TRUNSRVQtS0VZ
```

### Note

You can use the following command to get a base64-encoded string from a plain text one:

#### in Linux

```
$ echo -n 'plain-text-string' | base64 --wrap=0
```

#### in macOS

```
$ echo -n 'plain-text-string' | base64
```

Once the editing is over, create the Kubernetes Secret object as follows:

```
$ kubectl apply -f deploy/backup/backup-secret-s3.yaml
```

### Note

In case the previous backup attempt fails (because of a temporary networking problem, etc.) the backup job tries to delete the unsuccessful backup leftovers first, and then makes a retry. Therefore there will be no backup retry without [DELETE permissions to the objects in the bucket](#) [↗](#). Also, setting [Google Cloud Storage Retention Period](#) [↗](#) can cause a similar problem.

2. Put the data needed to access the S3-compatible cloud into the `backup.storages` subsection of the Custom Resource.

- `storages.<NAME>.type` should be set to `s3` (substitute the part with some arbitrary name you will later use to refer this storage when making backups and restores).
- `storages.<NAME>.s3.credentialsSecret` key should be set to the name used to refer your Kubernetes Secret (`my-cluster-name-backup-s3` in the last example).
- `storages.<NAME>.s3.bucket` and `storages.<NAME>.s3.region` should contain the S3 bucket and region.
- if you use some S3-compatible storage instead of the original Amazon S3, add the `endpointURL` [↗](#) key in the `s3` subsection, which should point to the actual cloud used for backups. This value is specific to the cloud provider. For example, using [Google Cloud](#) [↗](#) involves the [following](#) [↗](#) endpointUrl:

```
endpointUrl: https://storage.googleapis.com
```

The options within the `storages.<NAME>.s3` subsection are further explained in the [Operator Custom Resource options](#).

Here is an example of the [deploy/cr.yaml](#) [↗](#) configuration file which configures Amazon S3 storage for backups:

```

...
backup:
  ...
  storages:
    s3-us-west:
      type: s3
      s3:
        bucket: S3-BACKUP-BUCKET-NAME-HERE
        region: us-west-2
        credentialsSecret: my-cluster-name-backup-s3
  ...

```

## Microsoft Azure Blob storage

1. To store backups on the Azure Blob storage, you need to create a Secret with the following values:

- the `metadata.name` key is the name which you will further use to refer your Kubernetes Secret,
- the `data.AZURE_STORAGE_ACCOUNT_NAME` and `data.AZURE_STORAGE_ACCOUNT_KEY` keys are base64-encoded credentials used to access the storage (obviously these keys should contain proper values to make the access possible).

Create the Secrets file with these base64-encoded keys following the [deploy/backup/backup-secret-azure.yaml](#) [↗](#) example:

```

apiVersion: v1
kind: Secret
metadata:
  name: azure-secret
type: Opaque
data:
  AZURE_STORAGE_ACCOUNT_NAME: UkVQTEFDRS1XSVRILUFxUy1BQ0NFU1MtS0VZ
  AZURE_STORAGE_ACCOUNT_KEY: UkVQTEFDRS1XSVRILUFxUy1TRUNSRVQtS0VZ

```

### Note

You can use the following command to get a base64-encoded string from a plain text one:

#### in Linux

```
$ echo -n 'plain-text-string' | base64 --wrap=0
```

#### in macOS

```
$ echo -n 'plain-text-string' | base64
```

Once the editing is over, create the Kubernetes Secret object as follows:

```
$ kubectl apply -f deploy/backup/backup-secret-azure.yaml
```

2. Put the data needed to access the Azure Blob storage into the `backup.storages` subsection of the Custom Resource.

- `storages.<NAME>.type` should be set to `azure` (substitute the `<NAME>` part with some arbitrary name you will later use to refer this storage when making backups and restores).
- `storages.<NAME>.azure.credentialsSecret` key should be set to the name used to refer your Kubernetes Secret (`azure-secret` in the last example).
- `storages.<NAME>.azure.container` option should contain the name of the Azure [container](#) [↗](#).

The options within the `storages.<NAME>.azure` subsection are further explained in the [Operator Custom Resource options](#).

Here is an example of the [deploy/cr.yaml](#) [↗](#) configuration file which configures Azure Blob storage for backups:

```
...
backup:
  ...
  storages:
    azure-blob:
      type: azure
      azure:
        container: <your-container-name>
        credentialsSecret: azure-secret
      ...
```

## Persistent Volume

Here is an example of the `deploy/cr.yaml` backup section fragment, which configures a private volume for filesystem-type storage:

```
...
backup:
  ...
  storages:
    fs-pvc:
      type: filesystem
      volume:
        persistentVolumeClaim:
          accessModes: [ "ReadWriteOnce" ]
          resources:
            requests:
              storage: 6G
      ...
```

### Note

Please take into account that 6Gi storage size specified in this example may be insufficient for the real-life setups; consider using tens or hundreds of gigabytes. Also, you can edit this option later, and changes will take effect after applying the updated `deploy/cr.yaml` file with `kubectl`.

### Note

Typically, Percona XtraBackup tools used by the Operator to perform the backup/restore process does not require any additional configuration beyond the standard parameters mentioned above. However, if access to a non-standard cloud requires some fine-tuning, you can pass additional options to the binary XtraBackup utilities using the following Custom Resource options: [backup.storages.STORAGE\\_NAME.containerOptions.args.xtrabackup](#), [backup.storages.STORAGE\\_NAME.containerOptions.args.xbcloud](#), and [backup.storages.STORAGE\\_NAME.containerOptions.args.xbstream](#). Also, you can set environment variables for the XtraBackup container with [backup.storages.STORAGE\\_NAME.containerOptions.env](#).



# Making scheduled backups

Backups schedule is defined in the `backup` section of the Custom Resource and can be configured via the [deploy/cr.yaml](#) file.

1. The `backup.storages` subsection should contain at least one [configured storage](#).
2. The `backup.schedule` subsection allows to actually schedule backups:
  - set the `backup.schedule.name` key to some arbitrary backup name (this name will be needed later to [restore the backup](#)).
  - specify the `backup.schedule.schedule` option with the desired backup schedule in [crontab format](#).
  - set the `backup.schedule.storageName` key to the name of your [already configured storage](#).
  - you can optionally set the `backup.schedule.keep` key to the number of backups which should be kept in the storage.

Here is an example of the `deploy/cr.yaml` with a scheduled Saturday night backup kept on the Amazon S3 storage:

```
...
backup:
  storages:
    s3-us-west:
      type: s3
      s3:
        bucket: S3-BACKUP-BUCKET-NAME-HERE
        region: us-west-2
        credentialsSecret: my-cluster-name-backup-s3
  schedule:
    - name: "sat-night-backup"
      schedule: "0 0 * * 6"
      keep: 3
      storageName: s3-us-west
...
```

## Note

Before the Operator version 1.10 scheduled backups were based on [Kubernetes CronJobs](#), while newer Operator versions take care about scheduled backups itself. Clusters upgraded from the Operator version 1.9 may need manual deletion of scheduled backups CronJobs, if any existed prior to the upgrade (otherwise backups will run twice).

You can check if there are any CronJobs in the namespace of your cluster related to scheduled backups as follows:

```
$ kubectl get cronjobs -n <namespace>
```

### Expected output

```
NAME SCHEDULE SUSPEND ACTIVE LAST SCHEDULE AGE
sat-night-backup 0 0 * * 6 False 0 <none> 4m36s
```

Deleting CronJob is straightforward:

```
$ kubectl delete cronjob sat-night-backup -n <namespace>
```

### Expected output

```
cronjob.batch "sat-night-backup" deleted
```

# Make on-demand backup

1. To make an on-demand backup, you should first check your Custom Resource for the necessary options and make changes, if needed, using the `deploy/cr.yaml` configuration file. The `backup.storages` subsection should contain at least one [configured storage](#).

You can apply changes in the `deploy/cr.yaml` file with the usual `kubectl apply -f deploy/cr.yaml` command.

2. Now use a *special backup configuration YAML file* with the following keys:

- `metadata.name` key should be set to the **backup name** (this name will be needed later to [restore the backup](#)),
- `spec.pxcCluster` key should be set to the name of your cluster,
- `spec.storageName` key should be set to the name of your [already configured storage](#).
- optionally you can set the `metadata.finalizers.delete-s3-backup` key (it triggers the actual deletion of backup files from the S3 bucket or azure container when there is a manual or scheduled removal of the corresponding backup object).

You can find the example of such file in [deploy/backup/backup.yaml](#) ↗:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterBackup
metadata:
  finalizers:
    - delete-s3-backup
  name: backup1
spec:
  pxcCluster: cluster1
  storageName: fs-pvc
```

3. Run the actual backup command using this file:

```
$ kubectl apply -f deploy/backup/backup.yaml
```

4. Track the backup process by checking the status of the Backup object:

```
$ kubectl get pxc-backup -w
```

The `-w` flag instructs the Operator to provide real-time updates about the backup progress. The Succeeded status indicates that a backup is completed.

# Store binary logs for point-in-time recovery

Point-in-time recovery allows users to roll back the cluster to a specific transaction or time. You can even skip a transaction if you don't need it anymore. To make a point-in-time recovery, the Operator needs a backup and binary logs (binlogs) of the server to.

A binary log records all changes made to the database, such as updates, inserts, and deletes. It is used to synchronize data across servers for and point-in-time recovery.

Point-in-time recovery is off by default and is supported by the Operator with Percona XtraDB Cluster versions starting from 8.0.21-12.1.

After you [enable point-in-time recovery](#), the Operator spins up a separate point-in-time recovery Pod, which starts saving binary log updates [to the backup storage](#).

## Considerations

1. You must use either s3-compatible or Azure-compatible storage for both binlog and full backup to make the point-in-time recovery work
2. The Operator saves binlogs without any cluster-based filtering. Therefore, either use a separate folder per cluster on the same bucket or use different buckets for binlogs.  
Also, we recommend to have an empty bucket or a folder on a bucket for binlogs when you enable point-in-time recovery. This bucket/folder should not contain no binlogs nor files from previous attempts or other clusters.
3. Don't [purge binlogs](#) before they are transferred to the backup storage. Doing so breaks point-in-time recovery.
4. Disable the [retention policy](#) as it is incompatible with the point-in-time recovery. To clean up the storage, configure the [Bucket lifecycle](#) on the storage

## Enable point-in-time recovery

To use point-in-time recovery, set the following keys in the `pitr` subsection under the `backup` section of the [deploy/cr.yaml](#) manifest:

- `backup.pitr.enabled` - set it to `true`
- `backup.pitr.storageName` - specify the same storage name that you have defined in the `storages` subsection
- `timeBetweenUploads` - specify the number of seconds between running the binlog uploader

The following example shows how the `pitr` subsection looks like if you use the S3 storage:

```
backup:
  ...
  pitr:
    enabled: true
    storageName: s3-us-west
    timeBetweenUploads: 60
```

For how to restore a database to a specific point in time, see [Restore the cluster with point-in-time recovery](#).

## Binary logs statistics

The point-in-time recovery Pod has statistics metrics for binlogs. They provide insights into the success and failure rates of binlog operations, timeliness of processing and uploads and potential gaps or inconsistencies in binlog data.

The available metrics are:

- `pxc_binlog_collector_success_total` - The total number of successful binlog collection cycles. It helps monitor how often the binlog collector successfully processes and uploads binary logs.
- `pxc_binlog_collector_gap_detected_total` - Tracks the total number of gaps detected in the binlog sequence during collection. Highlights potential issues with missing or skipped binlogs, which could impact replication or recovery.
- `pxc_binlog_collector_last_processing_timestamp` - Records the timestamp of the last successful binlog collection operation.
- `pxc_binlog_collector_last_upload_timestamp` - Records the timestamp of the last successful binlog upload to the storage
- `pxc_binlog_collector_uploaded_total` - The total number of successfully uploaded binlogs

## Gather metrics data

You can connect to the point-in-time recovery Pod using the `<pitr-pod-service>:8080/metrics` endpoint to gather these metrics and further analyze them.

List services to get the point-in-time-recovery service name:

```
$ kubectl get services | grep 'pitr'
```

### Expected output

|               |           |                |        |          |
|---------------|-----------|----------------|--------|----------|
| cluster1-pitr | ClusterIP | 34.118.225.138 | <none> | 8080/TCP |
|---------------|-----------|----------------|--------|----------|

## Access locally via port forwarding

Use this method to access the metrics from your local machine.

1. Forward the Kubernetes service's port:

```
$ kubectl port-forward svc/cluster1-pitr 8080:8080
```

2. Open your browser and visit `<http://localhost:8080/metrics>`



Expected output



```

# HELP go_gc_duration_seconds A summary of the wall-time pause (stop-the-world) duration in garbage collection cycles.
# TYPE go_gc_duration_seconds summary
go_gc_duration_seconds{quantile="0"} 0.000109735
go_gc_duration_seconds{quantile="0.25"} 0.000147529
go_gc_duration_seconds{quantile="0.5"} 0.000176199
go_gc_duration_seconds{quantile="0.75"} 0.000196962
go_gc_duration_seconds{quantile="1"} 0.000570426
go_gc_duration_seconds_sum 0.002970858
go_gc_duration_seconds_count 14
# HELP go_gc_gogc_percent Heap size target percentage configured by the user, otherwise 100. This value is set by the GOGC environment
variable, and the runtime/debug.SetGCPercent function. Sourced from /gc/gogc:percent.
# TYPE go_gc_gogc_percent gauge
go_gc_gogc_percent 100
# HELP go_gc_gomemlimit_bytes Go runtime memory limit configured by the user, otherwise math.MaxInt64. This value is set by the GOMEMLIMIT
environment variable, and the runtime/debug.SetMemoryLimit function. Sourced from /gc/gomemlimit:bytes.
# TYPE go_gc_gomemlimit_bytes gauge
go_gc_gomemlimit_bytes 9.223372036854776e+18
# HELP go_goroutines Number of goroutines that currently exist.
# TYPE go_goroutines gauge
go_goroutines 31
# HELP go_info Information about the Go environment.
# TYPE go_info gauge
go_info{version="go1.24.3"} 1
# HELP go_memstats_alloc_bytes Number of bytes allocated in heap and currently in use. Equals to /memory/classes/heap/objects:bytes.
# TYPE go_memstats_alloc_bytes gauge
go_memstats_alloc_bytes 2.83268e+06
# HELP go_memstats_alloc_bytes_total Total number of bytes allocated in heap until now, even if released already. Equals to
/gc/heap/allocs:bytes.
# TYPE go_memstats_alloc_bytes_total counter
go_memstats_alloc_bytes_total 5.80031448e+08
# HELP go_memstats_buck_hash_sys_bytes Number of bytes used by the profiling bucket hash table. Equals to
/memory/classes/profiling/buckets:bytes.
# TYPE go_memstats_buck_hash_sys_bytes gauge
go_memstats_buck_hash_sys_bytes 5696
# HELP go_memstats_frees_total Total number of heap objects frees. Equals to /gc/heap/frees:objects + /gc/heap/tiny/allocs:objects.
# TYPE go_memstats_frees_total counter
go_memstats_frees_total 112652
# HELP go_memstats_gc_sys_bytes Number of bytes used for garbage collection system metadata. Equals to
/memory/classes/metadata/other:bytes.
# TYPE go_memstats_gc_sys_bytes gauge
go_memstats_gc_sys_bytes 3.83684e+06
# HELP go_memstats_heap_alloc_bytes Number of heap bytes allocated and currently in use, same as go_memstats_alloc_bytes. Equals to
/memory/classes/heap/objects:bytes.
# TYPE go_memstats_heap_alloc_bytes gauge
go_memstats_heap_alloc_bytes 2.83268e+06
# HELP go_memstats_heap_idle_bytes Number of heap bytes waiting to be used. Equals to /memory/classes/heap/released:bytes +
/memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_idle_bytes gauge
go_memstats_heap_idle_bytes 5.681152e+08
# HELP go_memstats_heap_inuse_bytes Number of heap bytes that are in use. Equals to /memory/classes/heap/objects:bytes +
/memory/classes/heap/unused:bytes
# TYPE go_memstats_heap_inuse_bytes gauge
go_memstats_heap_inuse_bytes 5.423104e+06
# HELP go_memstats_heap_objects Number of currently allocated objects. Equals to /gc/heap/objects:objects.
# TYPE go_memstats_heap_objects gauge
go_memstats_heap_objects 11876
# HELP go_memstats_heap_released_bytes Number of heap bytes released to OS. Equals to /memory/classes/heap/released:bytes.
# TYPE go_memstats_heap_released_bytes gauge
go_memstats_heap_released_bytes 5.66616064e+08
# HELP go_memstats_heap_sys_bytes Number of heap bytes obtained from system. Equals to /memory/classes/heap/objects:bytes +
/memory/classes/heap/unused:bytes + /memory/classes/heap/released:bytes + /memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_sys_bytes gauge
go_memstats_heap_sys_bytes 5.73538304e+08
# HELP go_memstats_last_gc_time_seconds Number of seconds since 1970 of last garbage collection.
# TYPE go_memstats_last_gc_time_seconds gauge
go_memstats_last_gc_time_seconds 1.7492150571437228e+09
# HELP go_memstats_mallocs_total Total number of heap objects allocated, both live and gc-ed. Semantically a counter version for
go_memstats_heap_objects gauge. Equals to /gc/heap/allocs:objects + /gc/heap/tiny/allocs:objects.
# TYPE go_memstats_mallocs_total counter
go_memstats_mallocs_total 124528
# HELP go_memstats_mcache_inuse_bytes Number of bytes in use by mcache structures. Equals to
/memory/classes/metadata/mcache/inuse:bytes.
# TYPE go_memstats_mcache_inuse_bytes gauge
go_memstats_mcache_inuse_bytes 4832
# HELP go_memstats_mcache_sys_bytes Number of bytes used for mcache structures obtained from system. Equals to
/memory/classes/metadata/mcache/inuse:bytes + /memory/classes/metadata/mcache/free:bytes.
# TYPE go_memstats_mcache_sys_bytes gauge
go_memstats_mcache_sys_bytes 15704
# HELP go_memstats_mspan_inuse_bytes Number of bytes in use by mspan structures. Equals to /memory/classes/metadata/mspan/inuse:bytes.
# TYPE go_memstats_mspan_inuse_bytes gauge
go_memstats_mspan_inuse_bytes 125920
# HELP go_memstats_mspan_sys_bytes Number of bytes used for mspan structures obtained from system. Equals to
/memory/classes/metadata/mspan/inuse:bytes + /memory/classes/metadata/mspan/free:bytes.
# TYPE go_memstats_mspan_sys_bytes gauge
go_memstats_mspan_sys_bytes 146880
# HELP go_memstats_next_gc_bytes Number of heap bytes when next garbage collection will take place. Equals to /gc/heap/goal:bytes.

```

```

# TYPE go_memstats_next_gc_bytes gauge
go_memstats_next_gc_bytes 6.04629e+06
# HELP go_memstats_other_sys_bytes Number of bytes used for other system allocations. Equals to /memory/classes/other:bytes.
# TYPE go_memstats_other_sys_bytes gauge
go_memstats_other_sys_bytes 764832
# HELP go_memstats_stack_inuse_bytes Number of bytes obtained from system for stack allocator in non-CGO environments. Equals to /memory/classes/heap/stacks:bytes.
# TYPE go_memstats_stack_inuse_bytes gauge
go_memstats_stack_inuse_bytes 1.081344e+06
# HELP go_memstats_stack_sys_bytes Number of bytes obtained from system for stack allocator. Equals to /memory/classes/heap/stacks:bytes + /memory/classes/os-stacks:bytes.
# TYPE go_memstats_stack_sys_bytes gauge
go_memstats_stack_sys_bytes 1.081344e+06
# HELP go_memstats_sys_bytes Number of bytes obtained from system. Equals to /memory/classes/total:byte.
# TYPE go_memstats_sys_bytes gauge
go_memstats_sys_bytes 5.793896e+08
# HELP go_sched_gomaxprocs_threads The current runtime.GOMAXPROCS setting, or the number of operating system threads that can execute user-level Go code simultaneously. Sourced from /sched/gomaxprocs:threads.
# TYPE go_sched_gomaxprocs_threads gauge
go_sched_gomaxprocs_threads 4
# HELP go_threads Number of OS threads created.
# TYPE go_threads gauge
go_threads 10
# HELP process_cpu_seconds_total Total user and system CPU time spent in seconds.
# TYPE process_cpu_seconds_total counter
process_cpu_seconds_total 0.55
# HELP process_max_fds Maximum number of open file descriptors.
# TYPE process_max_fds gauge
process_max_fds 1.048576e+06
# HELP process_network_receive_bytes_total Number of bytes received by the process over the network.
# TYPE process_network_receive_bytes_total counter
process_network_receive_bytes_total 1.172862e+06
# HELP process_network_transmit_bytes_total Number of bytes sent by the process over the network.
# TYPE process_network_transmit_bytes_total counter
process_network_transmit_bytes_total 632432
# HELP process_open_fds Number of open file descriptors.
# TYPE process_open_fds gauge
process_open_fds 9
# HELP process_resident_memory_bytes Resident memory size in bytes.
# TYPE process_resident_memory_bytes gauge
process_resident_memory_bytes 3.9350272e+07
# HELP process_start_time_seconds Start time of the process since unix epoch in seconds.
# TYPE process_start_time_seconds gauge
process_start_time_seconds 1.74921402754e+09
# HELP process_virtual_memory_bytes Virtual memory size in bytes.
# TYPE process_virtual_memory_bytes gauge
process_virtual_memory_bytes 1.901723648e+09
# HELP process_virtual_memory_max_bytes Maximum amount of virtual memory available in bytes.
# TYPE process_virtual_memory_max_bytes gauge
process_virtual_memory_max_bytes 1.8446744073709552e+19
# HELP promhttp_metric_handler_requests_in_flight Current number of scrapes being served.
# TYPE promhttp_metric_handler_requests_in_flight gauge
promhttp_metric_handler_requests_in_flight 1
# HELP promhttp_metric_handler_requests_total Total number of scrapes by HTTP status code.
# TYPE promhttp_metric_handler_requests_total counter
promhttp_metric_handler_requests_total{code="200"} 3
promhttp_metric_handler_requests_total{code="500"} 0
promhttp_metric_handler_requests_total{code="503"} 0
# HELP pxc_binlog_collector_failure_total Total number of failed binlog collection cycles
# TYPE pxc_binlog_collector_failure_total counter
pxc_binlog_collector_failure_total 0
# HELP pxc_binlog_collector_gap_detected_total Total number of times the gap was detected in binlog
# TYPE pxc_binlog_collector_gap_detected_total counter
pxc_binlog_collector_gap_detected_total 0
# HELP pxc_binlog_collector_last_processing_timestamp Timestamp of the last successful binlog processing
# TYPE pxc_binlog_collector_last_processing_timestamp gauge
pxc_binlog_collector_last_processing_timestamp 1.7492150471803956e+09
# HELP pxc_binlog_collector_last_upload_timestamp Timestamp of the last successful binlog upload
# TYPE pxc_binlog_collector_last_upload_timestamp gauge
pxc_binlog_collector_last_upload_timestamp 1.749214031447092e+09
# HELP pxc_binlog_collector_success_total Total number of successful binlog collection cycles
# TYPE pxc_binlog_collector_success_total counter
pxc_binlog_collector_success_total 19
# HELP pxc_binlog_collector_uploaded_total Total number of successfully uploaded binlogs
# TYPE pxc_binlog_collector_uploaded_total counter
pxc_binlog_collector_uploaded_total 1

```

## Access directly from a Pod

You can gather the metrics from inside a database cluster.

1. Connect to the cluster as follows, replacing the `<namespace>` placeholder with your value:

```
$ kubectl run -n <namespace> -i --rm --tty percona-client --image=percona:8.0 --restart=Never -- bash -il
```

2. Connect to the point-in-time recovery port using `curl`:

```
$ curl cluster1-pitr:8080/metrics
```





Expected output



```

# HELP go_gc_duration_seconds A summary of the wall-time pause (stop-the-world) duration in garbage collection cycles.
# TYPE go_gc_duration_seconds summary
go_gc_duration_seconds{quantile="0"} 0.000109735
go_gc_duration_seconds{quantile="0.25"} 0.000147529
go_gc_duration_seconds{quantile="0.5"} 0.000176199
go_gc_duration_seconds{quantile="0.75"} 0.000196962
go_gc_duration_seconds{quantile="1"} 0.000570426
go_gc_duration_seconds_sum 0.002970858
go_gc_duration_seconds_count 14
# HELP go_gc_gogc_percent Heap size target percentage configured by the user, otherwise 100. This value is set by the GOGC environment
variable, and the runtime/debug.SetGCPercent function. Sourced from /gc/gogc:percent.
# TYPE go_gc_gogc_percent gauge
go_gc_gogc_percent 100
# HELP go_gc_gomemlimit_bytes Go runtime memory limit configured by the user, otherwise math.MaxInt64. This value is set by the GOMEMLIMIT
environment variable, and the runtime/debug.SetMemoryLimit function. Sourced from /gc/gomemlimit:bytes.
# TYPE go_gc_gomemlimit_bytes gauge
go_gc_gomemlimit_bytes 9.223372036854776e+18
# HELP go_goroutines Number of goroutines that currently exist.
# TYPE go_goroutines gauge
go_goroutines 31
# HELP go_info Information about the Go environment.
# TYPE go_info gauge
go_info{version="go1.24.3"} 1
# HELP go_memstats_alloc_bytes Number of bytes allocated in heap and currently in use. Equals to /memory/classes/heap/objects:bytes.
# TYPE go_memstats_alloc_bytes gauge
go_memstats_alloc_bytes 2.83268e+06
# HELP go_memstats_alloc_bytes_total Total number of bytes allocated in heap until now, even if released already. Equals to
/gc/heap/allocs:bytes.
# TYPE go_memstats_alloc_bytes_total counter
go_memstats_alloc_bytes_total 5.80031448e+08
# HELP go_memstats_buck_hash_sys_bytes Number of bytes used by the profiling bucket hash table. Equals to
/memory/classes/profiling/buckets:bytes.
# TYPE go_memstats_buck_hash_sys_bytes gauge
go_memstats_buck_hash_sys_bytes 5696
# HELP go_memstats_frees_total Total number of heap objects frees. Equals to /gc/heap/frees:objects + /gc/heap/tiny/allocs:objects.
# TYPE go_memstats_frees_total counter
go_memstats_frees_total 112652
# HELP go_memstats_gc_sys_bytes Number of bytes used for garbage collection system metadata. Equals to
/memory/classes/metadata/other:bytes.
# TYPE go_memstats_gc_sys_bytes gauge
go_memstats_gc_sys_bytes 3.83684e+06
# HELP go_memstats_heap_alloc_bytes Number of heap bytes allocated and currently in use, same as go_memstats_alloc_bytes. Equals to
/memory/classes/heap/objects:bytes.
# TYPE go_memstats_heap_alloc_bytes gauge
go_memstats_heap_alloc_bytes 2.83268e+06
# HELP go_memstats_heap_idle_bytes Number of heap bytes waiting to be used. Equals to /memory/classes/heap/released:bytes +
/memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_idle_bytes gauge
go_memstats_heap_idle_bytes 5.681152e+08
# HELP go_memstats_heap_inuse_bytes Number of heap bytes that are in use. Equals to /memory/classes/heap/objects:bytes +
/memory/classes/heap/unused:bytes
# TYPE go_memstats_heap_inuse_bytes gauge
go_memstats_heap_inuse_bytes 5.423104e+06
# HELP go_memstats_heap_objects Number of currently allocated objects. Equals to /gc/heap/objects:objects.
# TYPE go_memstats_heap_objects gauge
go_memstats_heap_objects 11876
# HELP go_memstats_heap_released_bytes Number of heap bytes released to OS. Equals to /memory/classes/heap/released:bytes.
# TYPE go_memstats_heap_released_bytes gauge
go_memstats_heap_released_bytes 5.66616064e+08
# HELP go_memstats_heap_sys_bytes Number of heap bytes obtained from system. Equals to /memory/classes/heap/objects:bytes +
/memory/classes/heap/unused:bytes + /memory/classes/heap/released:bytes + /memory/classes/heap/free:bytes.
# TYPE go_memstats_heap_sys_bytes gauge
go_memstats_heap_sys_bytes 5.73538304e+08
# HELP go_memstats_last_gc_time_seconds Number of seconds since 1970 of last garbage collection.
# TYPE go_memstats_last_gc_time_seconds gauge
go_memstats_last_gc_time_seconds 1.7492150571437228e+09
# HELP go_memstats_mallocs_total Total number of heap objects allocated, both live and gc-ed. Semantically a counter version for
go_memstats_heap_objects gauge. Equals to /gc/heap/allocs:objects + /gc/heap/tiny/allocs:objects.
# TYPE go_memstats_mallocs_total counter
go_memstats_mallocs_total 124528
# HELP go_memstats_mcache_inuse_bytes Number of bytes in use by mcache structures. Equals to
/memory/classes/metadata/mcache/inuse:bytes.
# TYPE go_memstats_mcache_inuse_bytes gauge
go_memstats_mcache_inuse_bytes 4832
# HELP go_memstats_mcache_sys_bytes Number of bytes used for mcache structures obtained from system. Equals to
/memory/classes/metadata/mcache/inuse:bytes + /memory/classes/metadata/mcache/free:bytes.
# TYPE go_memstats_mcache_sys_bytes gauge
go_memstats_mcache_sys_bytes 15704
# HELP go_memstats_mspan_inuse_bytes Number of bytes in use by mspan structures. Equals to /memory/classes/metadata/mspan/inuse:bytes.
# TYPE go_memstats_mspan_inuse_bytes gauge
go_memstats_mspan_inuse_bytes 125920
# HELP go_memstats_mspan_sys_bytes Number of bytes used for mspan structures obtained from system. Equals to
/memory/classes/metadata/mspan/inuse:bytes + /memory/classes/metadata/mspan/free:bytes.
# TYPE go_memstats_mspan_sys_bytes gauge
go_memstats_mspan_sys_bytes 146880
# HELP go_memstats_next_gc_bytes Number of heap bytes when next garbage collection will take place. Equals to /gc/heap/goal:bytes.

```

```

# TYPE go_memstats_next_gc_bytes gauge
go_memstats_next_gc_bytes 6.04629e+06
# HELP go_memstats_other_sys_bytes Number of bytes used for other system allocations. Equals to /memory/classes/other:bytes.
# TYPE go_memstats_other_sys_bytes gauge
go_memstats_other_sys_bytes 764832
# HELP go_memstats_stack_inuse_bytes Number of bytes obtained from system for stack allocator in non-CGO environments. Equals to /memory/classes/heap/stacks:bytes.
# TYPE go_memstats_stack_inuse_bytes gauge
go_memstats_stack_inuse_bytes 1.081344e+06
# HELP go_memstats_stack_sys_bytes Number of bytes obtained from system for stack allocator. Equals to /memory/classes/heap/stacks:bytes + /memory/classes/os-stacks:bytes.
# TYPE go_memstats_stack_sys_bytes gauge
go_memstats_stack_sys_bytes 1.081344e+06
# HELP go_memstats_sys_bytes Number of bytes obtained from system. Equals to /memory/classes/total:byte.
# TYPE go_memstats_sys_bytes gauge
go_memstats_sys_bytes 5.793896e+08
# HELP go_sched_gomaxprocs_threads The current runtime.GOMAXPROCS setting, or the number of operating system threads that can execute user-level Go code simultaneously. Sourced from /sched/gomaxprocs:threads.
# TYPE go_sched_gomaxprocs_threads gauge
go_sched_gomaxprocs_threads 4
# HELP go_threads Number of OS threads created.
# TYPE go_threads gauge
go_threads 10
# HELP process_cpu_seconds_total Total user and system CPU time spent in seconds.
# TYPE process_cpu_seconds_total counter
process_cpu_seconds_total 0.55
# HELP process_max_fds Maximum number of open file descriptors.
# TYPE process_max_fds gauge
process_max_fds 1.048576e+06
# HELP process_network_receive_bytes_total Number of bytes received by the process over the network.
# TYPE process_network_receive_bytes_total counter
process_network_receive_bytes_total 1.172862e+06
# HELP process_network_transmit_bytes_total Number of bytes sent by the process over the network.
# TYPE process_network_transmit_bytes_total counter
process_network_transmit_bytes_total 632432
# HELP process_open_fds Number of open file descriptors.
# TYPE process_open_fds gauge
process_open_fds 9
# HELP process_resident_memory_bytes Resident memory size in bytes.
# TYPE process_resident_memory_bytes gauge
process_resident_memory_bytes 3.9350272e+07
# HELP process_start_time_seconds Start time of the process since unix epoch in seconds.
# TYPE process_start_time_seconds gauge
process_start_time_seconds 1.74921402754e+09
# HELP process_virtual_memory_bytes Virtual memory size in bytes.
# TYPE process_virtual_memory_bytes gauge
process_virtual_memory_bytes 1.901723648e+09
# HELP process_virtual_memory_max_bytes Maximum amount of virtual memory available in bytes.
# TYPE process_virtual_memory_max_bytes gauge
process_virtual_memory_max_bytes 1.8446744073709552e+19
# HELP promhttp_metric_handler_requests_in_flight Current number of scrapes being served.
# TYPE promhttp_metric_handler_requests_in_flight gauge
promhttp_metric_handler_requests_in_flight 1
# HELP promhttp_metric_handler_requests_total Total number of scrapes by HTTP status code.
# TYPE promhttp_metric_handler_requests_total counter
promhttp_metric_handler_requests_total{code="200"} 3
promhttp_metric_handler_requests_total{code="500"} 0
promhttp_metric_handler_requests_total{code="503"} 0
# HELP pxc_binlog_collector_failure_total Total number of failed binlog collection cycles
# TYPE pxc_binlog_collector_failure_total counter
pxc_binlog_collector_failure_total 0
# HELP pxc_binlog_collector_gap_detected_total Total number of times the gap was detected in binlog
# TYPE pxc_binlog_collector_gap_detected_total counter
pxc_binlog_collector_gap_detected_total 0
# HELP pxc_binlog_collector_last_processing_timestamp Timestamp of the last successful binlog processing
# TYPE pxc_binlog_collector_last_processing_timestamp gauge
pxc_binlog_collector_last_processing_timestamp 1.7492150471803956e+09
# HELP pxc_binlog_collector_last_upload_timestamp Timestamp of the last successful binlog upload
# TYPE pxc_binlog_collector_last_upload_timestamp gauge
pxc_binlog_collector_last_upload_timestamp 1.749214031447092e+09
# HELP pxc_binlog_collector_success_total Total number of successful binlog collection cycles
# TYPE pxc_binlog_collector_success_total counter
pxc_binlog_collector_success_total 19
# HELP pxc_binlog_collector_uploaded_total Total number of successfully uploaded binlogs
# TYPE pxc_binlog_collector_uploaded_total counter
pxc_binlog_collector_uploaded_total 1

```

Note that the statistics data is not kept when the point-in-time recovery Pod restarts. This means that the counters like `pxc_binlog_collector_success_total` are reset.

## Enable compression for backups

You can enable [LZ4 compression](#) for backups if you run Percona XtraDB Cluster 8.0 and higher.

To enable compression, use the [pxc.configuration](#) key in the `deploy/cr.yaml` configuration file. Specify the following options from the `my.cnf` configuration file in the `[sst]` and `[xtrabackup]` sections:

```
pxc:
  image: percona/percona-xtradb-cluster:8.0.19-10.1
  configuration: |
    ...
    [sst]
    xstream-opts=--decompress
    [xtrabackup]
    compress=lz4
    ...
```

When enabled, compression will be used for both backups and [SST](#).

# Restore the cluster from a previously saved backup

The backup is normally restored on the Kubernetes cluster where it was made, but [restoring it on a different Kubernetes-based environment with the installed Operator is also possible](#).

Backups **cannot be restored** to [emptyDir and hostPath volumes](#), but it is possible to make a backup from such storage (i. e., from emptyDir/hostPath to S3), and later restore it to a [Persistent Volume](#).

To restore a backup, you will use the special restore configuration file. The example of such file is [deploy/backup/restore.yaml](#). The list of options that can be used in it can be found in the [restore options reference](#).

Following things are needed to restore a previously saved backup:

- Make sure that the cluster is running.
- Find out correct names for the **backup** and the **cluster**. Available backups can be listed with the following command:

```
$ kubectl get pxc-backup
```

And the following command will list available clusters:

```
$ kubectl get pxc
```

## Note

If you have [configured storing binlogs for point-in-time recovery](#), you will have possibility to roll back the cluster to a specific transaction, time (or even skip a transaction in some cases). Otherwise, restoring backups without point-in-time recovery is the only option.

When the correct names for the backup and the cluster are known, backup restoration can be done in the following way.

## Restore the cluster without point-in-time recovery

1. Set appropriate keys in the [deploy/backup/restore.yaml](#) file.

- set `spec.pxcCluster` key to the name of the target cluster to restore the backup on,
- set `spec.backupName` key to the name of your backup,
- you can also use a `storageName` key to specify the exact name of the storage (the actual storage should be [already defined](#) in the `backup.storages` subsection of the `deploy/cr.yaml` file):

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster1
  backupName: backup1
  storageName: s3-us-west
```

2. After that, the actual restoration process can be started as follows:

```
$ kubectl apply -f deploy/backup/restore.yaml
```

#### Note

Storing backup settings in a separate file can be replaced by passing its content to the `kubectl apply` command as follows:

```
$ cat <<EOF | kubectl apply -f-
apiVersion: "pxc.percona.com/v1"
kind: "PerconaXtraDBClusterRestore"
metadata:
  name: "restore1"
spec:
  pxcCluster: "cluster1"
  backupName: "backup1"
EOF
```

## Restore the cluster with point-in-time recovery

#### Note

Disable the point-in-time functionality on the existing cluster before restoring a backup on it, regardless of whether the backup was made with point-in-time recovery or without it.

1. Set appropriate keys in the [deploy/backup/restore.yaml](#) file.

- set `spec.pxcCluster` key to the name of the target cluster to restore the backup on,
- set `spec.backupName` key to the name of your backup,
- put additional restoration parameters to the `pitr` section:
  - `type` key can be equal to one of the following options,
    - `date` - roll back to specific date,
    - `transaction` - roll back to a specific transaction (available since Operator 1.8.0),
    - `latest` - recover to the latest possible transaction,
    - `skip` - skip a specific transaction (available since Operator 1.7.0).
  - `date` key is used with `type=date` option and contains value in datetime format,
  - `gtid` key (available since the Operator 1.8.0) is used with `type=transaction` option and contains exact GTID of a transaction **which follows** the last transaction included into the recovery
- use `backupSource.storageName` key to specify the exact name of the storage (the actual storage should be [already defined](#) in the `backup.storages` subsection of the `deploy/cr.yaml` file).

The resulting `restore.yaml` file may look as follows:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster1
  backupName: backup1
  pitr:
    type: date
    date: "2020-12-31 09:37:13"
  backupSource:
    storageName: "s3-us-west"
```

#### Note

Full backup objects available with the `kubectl get pxc-backup` command have a "Latest restorable time" information field handy when selecting a backup to restore. You can easily query the backup for this information as follows:

```
$ kubectl get pxc-backup <backup_name> -o jsonpath='{.status.latestRestorableTime}'
```

2. Run the actual restoration process:

```
$ kubectl apply -f deploy/backup/restore.yaml
```

#### Note

Storing backup settings in a separate file can be replaced by passing its content to the `kubectl apply` command as follows:

```
$ cat <<EOF | kubectl apply -f-
apiVersion: "pxc.percona.com/v1"
kind: "PerconaXtraDBClusterRestore"
metadata:
  name: "restore1"
spec:
  pxcCluster: "cluster1"
  backupName: "backup1"
  pitr:
    type: date
    date: "2020-12-31 09:37:13"
    backupSource:
      storageName: "s3-us-west"
EOF
```

Take into account, that Operator monitors the binlog gaps detected by binlog collector, if any. If backup contains such gaps, the Operator will mark the status of the latest successful backup with a new condition field that indicates backup can't guarantee consistent point-in-time recovery. This condition looks as follows:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterBackup
metadata:
  name: backup1
spec:
  pxcCluster: pitr
  storageName: minio
status:
  completed: "2022-11-25T15:57:29Z"
  conditions:
  - lastTransitionTime: "2022-11-25T15:57:48Z"
    message: Binlog with GTID set e41eb219-6cd8-11ed-94c8-9ebf697d3d20:21-22 not found
    reason: BinlogGapDetected
    status: "False"
    type: PITRReady
    state: Succeeded
```

Trying to restore from such backup (with the condition value "False") with point-in-time recovery will result in the following error:

```
Backup doesn't guarantee consistent recovery with PITR. Annotate PerconaXtraDBClusterRestore with percona.com/unsafe-pitr to force it.
```

You can disable this check and force the restore by annotating it with `pxc.percona.com/unsafe-pitr` as follows:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  annotations:
    percona.com/unsafe-pitr: "true"
  name: restore2
spec:
  pxcCluster: pitr
  backupName: backup1
  pitr:
    type: latest
    backupSource:
      storageName: "minio-binlogs"
```

## Restore the cluster when backup has different passwords

If the cluster is restored to a backup which has different user passwords, the Operator will be unable connect to database using the passwords in Secrets, and so will fail to reconcile the cluster.

Let's consider an example with four backups, first two of which were done before the password rotation and therefore have different passwords:

| NAME    | CLUSTER  | STORAGE | DESTINATION    | STATUS    | COMPLETED | AGE   |
|---------|----------|---------|----------------|-----------|-----------|-------|
| backup1 | cluster1 | fs-pvc  | pvc/xb-backup1 | Succeeded | 23m       | 24m   |
| backup2 | cluster1 | fs-pvc  | pvc/xb-backup2 | Succeeded | 18m       | 19m   |
| backup3 | cluster1 | fs-pvc  | pvc/xb-backup3 | Succeeded | 13m       | 14m   |
| backup3 | cluster1 | fs-pvc  | pvc/xb-backup4 | Succeeded | 8m53s     | 9m29s |
| backup4 | cluster1 | fs-pvc  | pvc/xb-backup5 | Succeeded | 3m11s     | 4m29s |

In this case you will need some manual operations same as the Operator does to propagate password changes in Secrets to the database **before restoring a backup**.

When the user updates a password in the Secret, the Operator creates a temporary Secret called `<clusterName>-mysql-init` and puts (or appends) the required `ALTER USER` statement into it. Then MySQL Pods are mounting this init Secret if exist and running corresponding statements on startup. When a new backup is created and successfully finished, the Operator deletes the init Secret.

In the above example passwords are changed after backup2 was finished, and then three new backups were created, so the init Secret does not exist. If you want to restore to backup2, you need to create the init secret by your own with the latest passwords as follows.

1. Make a base64-encoded string with needed SQL statements (substitute each `<latestPass>` with the password of the appropriate user):

#### in Linux

```
$ cat <<EOF | base64 --wrap=0
ALTER USER 'root'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'root'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'operator'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'monitor'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'clustercheck'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'xtrabackup'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'xtrabackup'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'replication'@'%' IDENTIFIED BY '<latestPass>';
EOF
```

#### in macOS

```
$ cat <<EOF | base64
ALTER USER 'root'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'root'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'operator'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'monitor'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'clustercheck'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'xtrabackup'@'%' IDENTIFIED BY '<latestPass>';
ALTER USER 'xtrabackup'@'localhost' IDENTIFIED BY '<latestPass>';
ALTER USER 'replication'@'%' IDENTIFIED BY '<latestPass>';
EOF
```

2. After you obtained the needed base64-encoded string, create the appropriate Secret:

```
$ kubectl apply -f - <<EOF
apiVersion: v1
kind: Secret
type: Opaque
metadata:
  name: cluster1-mysql-init
data:
  init.sql: <base64encodedstring>
EOF
```

3. Now you can restore the needed backup as usual.



## Copy backup to a local machine

Make a local copy of a previously saved backup requires not more than the backup name. This name can be taken from the list of available backups returned by the following command:

```
$ kubectl get pxc-backup
```

When the name is known, backup can be downloaded to the local machine as follows:

```
$ ./deploy/backup/copy-backup.sh <backup-name> path/to/dir
```

For example, this downloaded backup can be restored to the local installation of Percona Server:

```
$ service mysqld stop
$ rm -rf /var/lib/mysql/*
$ cat xtrabackup.stream | xbstream -x -C /var/lib/mysql
$ xtrabackup --prepare --target-dir=/var/lib/mysql
$ chown -R mysql:mysql /var/lib/mysql
$ service mysqld start
```

If needed, you can also restore the backup to a Kubernetes cluster following the instructions [in this howto](#).

## Delete the unneeded backup

The maximum amount of stored backups is controlled by the [backup.schedule.keep](#) option (only successful backups are counted). Older backups are automatically deleted, so that amount of stored backups do not exceed this number. Setting `keep=0` or removing this option from `deploy/cr.yaml` disables automatic deletion of backups.

Manual deleting of a previously saved backup requires not more than the backup name. This name can be taken from the list of available backups returned by the following command:

```
$ kubectl get pxc-backup
```

When the name is known, backup can be deleted as follows:

```
$ kubectl delete pxc-backup/<backup-name>
```

# Scale MySQL on Kubernetes and OpenShift

One of the great advantages brought by Kubernetes and the OpenShift platform is the ease of an application scaling. Scaling an application results in adding resources or Pods and scheduling them to available Kubernetes nodes.

Scaling can be vertical and horizontal. Vertical scaling adds more compute or storage resources to MySQL nodes; horizontal scaling is about adding more nodes to the cluster.

## Vertical scaling

### Scale compute

There are multiple components that Operator deploys and manages: Percona XtraDB Cluster (PXC), HAProxy or ProxySQL, etc. To add or reduce CPU or Memory you need to edit corresponding sections in the Custom Resource. We follow the structure for `requests` and `limits` that Kubernetes [provides](#).

To add more resources to your MySQL nodes in PXC edit the following section in the Custom Resource:

```
spec:
  ...
  pxc:
    ...
    resources:
      requests:
        memory: 4G
        cpu: 2
      limits:
        memory: 4G
        cpu: 2
```

Use our reference documentation for the [Custom Resource options](#) for more details about other components.

### Scale storage

Kubernetes manages storage with a PersistentVolume (PV), a segment of storage supplied by the administrator, and a PersistentVolumeClaim (PVC), a request for storage from a user. In Kubernetes v1.11 the feature was added to allow a user to increase the size of an existing PVC object (considered stable since Kubernetes v1.24). The user cannot shrink the size of an existing PVC object.

Starting from the version 1.14.0, the Operator allows to scale Percona XtraDB Cluster storage automatically by changing the appropriate Custom Resource option, if the volume type supports PVCs expansion.

#### Automated scaling with Volume Expansion capability

Certain volume types support PVCs expansion (exact details about PVCs and the supported volume types can be found in [Kubernetes documentation](#)).

You can run the following command to check if your storage supports the expansion capability:

```
$ kubectl describe sc <storage class name> | grep AllowVolumeExpansion
```

#### Expected output

```
AllowVolumeExpansion: true
```

You can enable automated scaling with the [enableVolumeExpansion](#) Custom Resource option (turned off by default). When enabled, the Operator will automatically expand such storage for you when you change the `pxc.volumeSpec.persistentVolumeClaim.resources.requests.storage` option in the Custom Resource:

```
spec:
  ...
  enableVolumeExpansion: true
  ...
  pvc:
    ...
    volumeSpec:
      ...
      persistentVolumeClaim:
        resources:
          requests:
            storage: <NEW STORAGE SIZE>
```

#### Warning

If the new storage size can't be reached because there is a resource quota in place and the PVC storage limits are reached, this will be detected, there will be no scaling attempts, and the Operator will revert the value in the Custom Resource option back. If resize isn't successful (for example, no quota is set, but the new storage size turns out to be just too large), the Operator will detect Kubernetes failure on scaling, and revert the Custom Resource option. Still, Kubernetes will continue attempts to fulfill the scaling request until the problem is [fixed manually by the Kubernetes administrator](#).

For example, you can do it by editing and applying the `deploy/cr.yaml` file:

```
spec:
  ...
  pvc:
    ...
    volumeSpec:
      persistentVolumeClaim:
        resources:
          requests:
            storage: <NEW STORAGE SIZE>
```

Apply changes as usual:

```
$ kubectl apply -f cr.yaml
```

### Manual scaling without Volume Expansion capability

Manual scaling is the way to go if your version of the Operator is older than 1.14.0, your volumes have type which does not support Volume Expansion, or you just do not rely on automated scaling.

You will need to delete Pods one by one and their persistent volumes to resync the data to the new volumes. **This can also be used to shrink the storage.**

1. Update the Custom Resource with the new storage size by editing and applying the `deploy/cr.yaml` file:

```
spec:
  ...
  pvc:
    ...
    volumeSpec:
      persistentVolumeClaim:
        resources:
          requests:
            storage: <NEW STORAGE SIZE>
```

Apply the Custom Resource update in a usual way:

```
$ kubectl apply -f deploy/cr.yaml
```

2. Delete the StatefulSet with the `orphan` option

```
$ kubectl delete sts <statefulset-name> --cascade=orphan
```

The Pods will not go down and the Operator is going to recreate the StatefulSet:

```
$ kubectl get sts <statefulset-name>
```

#### Expected output

```
cluster1-pxc      3/3      39s
```

### 3. Scale up the cluster (Optional)

Changing the storage size would require us to terminate the Pods, which decreases the computational power of the cluster and might cause performance issues. To improve performance during the operation we are going to change the size of the cluster from 3 to 5 nodes:

```
...
spec:
...
  pxc:
    ...
    size: 5
```

Apply the change:

```
$ kubectl apply -f deploy/cr.yaml
```

New Pods will already have new storage:

```
$ kubectl get pvc
```

#### Expected output

| NAME                   | STATUS | VOLUME                                   | CAPACITY | ACCESS MODES | STORAGECLASS | AGE  |
|------------------------|--------|--|----------|--------------|--------------|------|
| datadir-cluster1-pxc-0 | Bound  | pvc-90f0633b-0938-4b66-a695-556bb8a9e943 | 10Gi     | RWO          | standard     | 110m |
| datadir-cluster1-pxc-1 | Bound  | pvc-7409ea83-15b6-448f-a6a0-12a139e2f5cc | 10Gi     | RWO          | standard     | 109m |
| datadir-cluster1-pxc-2 | Bound  | pvc-90f0b2f8-9bba-4262-904c-1740fdd5511b | 10Gi     | RWO          | standard     | 108m |
| datadir-cluster1-pxc-3 | Bound  | pvc-439bee13-3b57-4582-b342-98281aca50ba | 19Gi     | RWO          | standard     | 49m  |
| datadir-cluster1-pxc-4 | Bound  | pvc-2d4f3a60-4ec4-48a0-96cd-5243e2f05234 | 19Gi     | RWO          | standard     | 47m  |

### 4. Delete PVCs and Pods with old storage size one by one. Wait for data to sync before you proceeding to the next node.

```
$ kubectl delete pvc <PVC NAME>
$ kubectl delete pod <POD NAME>
```

The new PVC is going to be created along with the Pod.

## Horizontal scaling

Size of the cluster is controlled by a [size key](#) in the [Custom Resource options](#) configuration. That's why scaling the cluster needs nothing more but changing this option and applying the updated configuration file. This may be done in a specifically saved config:

```
spec:
...
  pxc:
    ...
    size: 5
```

Apply the change:

```
$ kubectl apply -f deploy/cr.yaml
```

Alternatively, you can do it on the fly, using the following command:

```
$ kubectl scale --replicas=5 pxc/<CLUSTER NAME>
```

In this example we have changed the size of the Percona XtraDB Cluster to 5 instances.

## Automated scaling

To automate horizontal scaling it is possible to use [Horizontal Pod Autoscaler \(HPA\)](#). It will scale the Custom Resource itself, letting Operator to deal with everything else.

It is also possible to use [Kubernetes Event-driven Autoscaling \(KEDA\)](#), where you can apply more sophisticated logic for decision making on scaling.

For now it is not possible to use Vertical Pod Autoscaler (VPA) with the Operator due to the limitations it introduces for objects with owner references.

# Monitor database with Percona Monitoring and Management (PMM)

We recommend to monitor the database with [Percona Monitoring and Management \(PMM\)](#) integrated within the Operator. You can also use [custom monitoring solutions](#), but their deployment is not automated by the Operator and requires manual setup).

In this section you will learn how to monitor Percona XtraDB Cluster with PMM.

PMM is a client/server application. It consists of the [PMM Server](#) and a number of [PMM Clients](#). PMM Clients run on each node with the database you wish to monitor. In Kubernetes, this means that PMM Clients run as sidecar containers for the database Pods.

A PMM Client collects needed metrics and sends the gathered data to the PMM Server. As a user, you connect to the PMM Server to see database metrics on a number of dashboards.

PMM Server and PMM Client are installed separately.

## Install PMM Server

You must have PMM server up and running. You can run PMM Server as a *Docker image*, a *virtual appliance*, or on an *AWS instance*. Please refer to the [official PMM documentation](#) for the installation instructions.

## Install PMM Client

Install PMM Client as a side-car container in your Kubernetes-based environment:

- 1 Authorize PMM Client within PMM Server.

### Token-based authorization (recommended)

1. [Generate the PMM Server API Key](#). Specify the Admin role when getting the API Key.

**Warning:** The API key is not rotated automatically.

- 1 Edit the [deploy/secrets.yaml](#) secrets file and specify the PMM API key for the `pmmserverkey` option.
- 2 Apply the configuration for the changes to take effect.

```
$ kubectl apply -f deploy/secrets.yaml -n <namespace>
```

### Password-based authorization (deprecated since the Operator 1.11.0)

- 1 Check that the `serverUser` key in the [deploy/cr.yaml](#) file contains your PMM Server user name (`admin` by default), and make sure the `pmmserver` key in the [deploy/secrets.yaml](#) secrets file contains the password specified for the PMM Server during its installation
- 2 Apply the configuration for the changes to take effect.

```
$ kubectl apply -f deploy/secrets.yaml -n <namespace>
```

- 2 Update the `pmm` section in the [deploy/cr.yaml](#) file:

- Set `pmm.enabled=true`.
- Specify your PMM Server hostname / an IP address for the `pmm.serverHost` option. The PMM Server IP address should be resolvable and reachable from within your cluster.

```
pmm:  
  enabled: true  
  image: percona/pmm-client:2.44.0  
  serverHost: monitoring-service
```

3 Apply the changes:

```
$ kubectl apply -f deploy/cr.yaml -n <namespace>
```

4 Check that corresponding Pods are not in a cycle of stopping and restarting. This cycle occurs if there are errors on the previous steps:

```
$ kubectl get pods -n <namespace>
$ kubectl logs <cluster-name>-pxc-0 -c pmm-client -n <namespace>
```

## Check the metrics

Let's see how the collected data is visualized in PMM.

Now you can access PMM via *https* in a web browser, with the login/password authentication, and the browser is configured to show Percona XtraDB Cluster metrics.

## Specify additional PMM parameters

You can specify additional parameters for [pmm-admin add mysql](#) and [pmm-admin add proxysql](#) commands, if needed. Use the `pmm.pxcParams` and `pmm.proxysqlParams` Custom Resource options for that.

The Operator automatically manages common Percona XtraDB Cluster Service Monitoring parameters mentioned in the official PMM documentation, such as username, password, service-name, host, etc. Assigning values to these parameters is not recommended and can negatively affect the functionality of the PMM setup carried out by the Operator.

## Update the secrets file

The `deploy/secrets.yaml` file contains all values for each key/value pair in a convenient plain text format. But the resulting Secrets Objects contains passwords stored as base64-encoded strings. If you want to *update* the password field, you need to encode the new password into the base64 format and pass it to the Secrets Object.

To encode a password or any other parameter, run the following command:

**on Linux**

```
$ echo -n "password" | base64 --wrap=0
```

**on macOS**

```
$ echo -n "password" | base64
```

For example, to set the new PMM API key to `new_key` in the `cluster1-secrets` object, do the following:

**in Linux**

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"pmmserverkey": "'$(echo -n new_key | base64 --wrap=0)'"}}'
```

**on macOS**

```
$ kubectl patch secret/cluster1-secrets -p '{"data":{"pmmserverkey": "'$(echo -n new_key | base64)'"}}'
```

## Check PMM Client health and status

A probe is a diagnostic mechanism in Kubernetes which helps determine whether a container is functioning correctly and whether it should continue to run, accept traffic, or be restarted.

PMM Client has the following probes:



- **Readiness probe** determines when a PMM Client is available and ready to accept traffic
- **Liveness probe** determines when to restart a PMM Client

To configure probes, use the `spec.pmm.readinessProbes` and `spec.pmm.livenessProbes` Custom Resource options.

## Add custom PMM prefix to the cluster name

When user has several clusters with the same namespace, cluster and Pod names, and a single PMM Server, it is possible to add only one of them to the PMM Server instance because of this names coincidence.

For such cases it is possible to specify a custom prefix to the cluster name, which will be visible within PMM, and so names will become unique.

You can do it by setting the `PMM_PREFIX` environment variable via the Secret, specified in the `pxc.envVarsSecret` Custom Resource option.

Here is an example of the YAML file used to create the Secret with the `my-unique-prefix-` prefix encoded in base64 format:

```
apiVersion: v1
kind: Secret
metadata:
  name: my-env-var-secrets
type: Opaque
data:
  PMM_PREFIX: bXktdW5pcXVlLXByZWZpeC0=
```

Follow the [instruction](#) on all details needed to create a Secret for environment variables and adding them to the Custom Resource.

## Implement custom monitoring solution without PMM

You can deploy your own monitoring solution instead of PMM, but since the Operator will know nothing about it, it will not gain the same level of deployment automation from the Operator side, and there will be no configuration via the Custom Resource. The approach to this is to deploy your monitoring agent as a sidecar container in Percona XtraDB Cluster Pods. See [sidecar containers documentation](#) for details.

### Note

You can use the [monitor system user](#) for monitoring purposes as PMM Client does. The Operator tracks the `monitor` user password update in the Secrets object (technical secrets used by the Operator, and restarts Percona XtraDB Cluster Pods in cases when PMM is enabled or when the sidecar container references the internal Secrets object `internal-<clustername>` (technical users secrets used by Operator, `internal-cluster1` by default) as follows:

```
pxc:
  sidecars:
  - name: metrics
    image: my_repo/my_custom_monitoring_solution:1.0
    env:
    - name: MYSQLD_EXPORTER_PASSWORD
      valueFrom:
        secretKeyRef:
          name: internal-cluster1
          key: monitor
    ...
```

# Using sidecar containers

The Operator allows you to deploy additional (so-called *sidecar*) containers to the Pod. You can use this feature to run debugging tools, some specific monitoring solutions, etc.

## Note

Custom sidecar containers [can easily access other components of your cluster](#).

Therefore they should be used carefully and by experienced users only.

## Adding a sidecar container

You can add sidecar containers to Percona XtraDB Cluster, HAProxy, and ProxySQL Pods. Just use `sidecars` subsectioning the `pxc`, `haproxy`, or `proxysql` section of the `deploy/cr.yaml` configuration file. In this subsection, you should specify the name and image of your container and possibly a command to run:

```
spec:
  pxc:
    ....
    sidecars:
    - image: busybox
      command: ["/bin/sh"]
      args: ["-c", "while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done"]
      name: my-sidecar-1
    ....
```

Apply your modifications as usual:

```
$ kubectl apply -f deploy/cr.yaml
```

Running `kubectl describe` command for the appropriate Pod can bring you the information about the newly created container:

```
$ kubectl describe pod cluster1-pxc-0
```

## Expected output

```
....
Containers:
....
my-sidecar-1:
  Container ID:  docker://f0c3437295d0ec819753c581aae174a0b8d062337f80897144eb8148249ba742
  Image:         busybox
  Image ID:     docker-pullable://busybox@sha256:139abcf41943b8bcd4bc5c42ee71ddc9402c7ad69ad9e177b0a9bc4541f14924
  Port:        <none>
  Host Port:   <none>
  Command:
  /bin/sh
  Args:
  -c
  while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done
  State:       Running
    Started:   Thu, 11 Nov 2021 10:38:15 +0300
  Ready:       True
  Restart Count: 0
  Environment: <none>
  Mounts:
  /var/run/secrets/kubernetes.io/serviceaccount from kube-api-access-fbrbn (ro)
....
```

## Getting shell access to a sidecar container

You can login to your sidecar container as follows:

```
$ kubectl exec -it cluster1-pxc-0 -c my-sidecar-1 -- sh
/ #
```

## Mount volumes into sidecar containers

It is possible to mount volumes into sidecar containers.

Following subsections describe different [volume types](#), which were tested with sidecar containers and are known to work.

### Persistent Volume

You can use [Persistent volumes](#) when you need dynamically provisioned storage which doesn't depend on the Pod lifecycle. To use such volume, you should *claim* durable storage with [persistentVolumeClaim](#) without specifying any non-important details.

The following example requests 1G storage with `sidecar-volume-claim` PersistentVolumeClaim, and mounts the correspondent Persistent Volume to the `my-sidecar-1` container's filesystem under the `/volume1` directory:

```
...
sidecars:
- image: busybox
  command: ["/bin/sh"]
  args: ["-c", "while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done"]
  name: my-sidecar-1
  volumeMounts:
  - mountPath: /volume1
    name: sidecar-volume-claim
sidecarPVCs:
- apiVersion: v1
  kind: PersistentVolumeClaim
  metadata:
    name: sidecar-volume-claim
  spec:
    resources:
      requests:
        storage: 1Gi
    volumeMode: Filesystem
    accessModes:
    - ReadWriteOnce
```

### Secret

You can use a [secret volume](#) to pass the information which needs additional protection (e.g. passwords), to the container. Secrets are stored with the Kubernetes API and mounted to the container as RAM-stored files.

You can mount a secret volume as follows:

```
...
sidecars:
- image: busybox
  command: ["/bin/sh"]
  args: ["-c", "while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done"]
  name: my-sidecar-1
  volumeMounts:
  - mountPath: /secret
    name: sidecar-secret
sidecarVolumes:
- name: sidecar-secret
  secret:
    secretName: mysecret
```

The above example creates a `sidecar-secret` volume (based on already existing `mysecret` [Secret object](#)) and mounts it to the `my-sidecar-1` container's filesystem under the `/secret` directory.

 **Note**

Don't forget you need to [create a Secret Object](#) before you can use it.

## configMap

You can use a [configMap volume](#) to pass some configuration data to the container. Secrets are stored with the Kubernetes API and mounted to the container as RAM-stored files.

You can mount a configMap volume as follows:

```
...
sidecars:
- image: busybox
  command: ["/bin/sh"]
  args: ["-c", "while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done"]
  name: my-sidecar-1
  volumeMounts:
  - mountPath: /config
    name: sidecar-config
  sidecarVolumes:
  - name: sidecar-config
    configMap:
      name: myconfigmap
```

The above example creates a `sidecar-config` volume (based on already existing `myconfigmap` [configMap object](#)) and mounts it to the `my-sidecar-1` container's filesystem under the `/config` directory.

 **Note**

Don't forget you need to [create a configMap Object](#) before you can use it.

# Pause/resume Percona XtraDB Cluster

There may be external situations when it is needed to shutdown the Percona XtraDB Cluster for a while and then start it back up (some works related to the maintenance of the enterprise infrastructure, etc.).

The `deploy/cr.yaml` file contains a special `spec.pause` key for this. Setting it to `true` gracefully stops the cluster:

```
spec:
  .....
  pause: true
```

Pausing the cluster may take some time, and when the process is over, you will see only the Operator Pod running:

```
$ kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
percona-xtradb-cluster-operator-79966668bd-rswbk  1/1     Running   0           12m
```

To start the cluster after it was shut down just revert the `spec.pause` key to `false`.

Starting the cluster will take time. The process is over when all Pods have reached their Running status:

```
NAME                                READY   STATUS    RESTARTS   AGE
cluster1-haproxy-0                  2/2     Running   0           6m17s
cluster1-haproxy-1                  2/2     Running   0           4m59s
cluster1-haproxy-2                  2/2     Running   0           4m36s
cluster1-pxc-0                       3/3     Running   0           6m17s
cluster1-pxc-1                       3/3     Running   0           5m3s
cluster1-pxc-2                       3/3     Running   0           3m56s
percona-xtradb-cluster-operator-79966668bd-rswbk  1/1     Running   0           9m54s
```

# Crash Recovery

## What does the full cluster crash mean?

A full cluster crash is a situation when all database instances were shut down in random order. Being rebooted after such situation, Pod is continuously restarting, and generates the following errors in the log:

```
It may not be safe to bootstrap the cluster from this node. It was not the last one to leave the cluster and may not contain all the updates.  
To force cluster bootstrap with this node, edit the grastate.dat file manually and set safe_to_bootstrap to 1
```

### Note

To avoid this, shutdown your cluster correctly as it is written in [Pause/resume Percona XtraDB Cluster](#).

The Percona Operator for MySQL based on Percona XtraDB Cluster provides two ways of recovery after a full cluster crash.

The Operator is providing automatic crash recovery (by default) and semi-automatic recovery starting from the version 1.7. For the previous Operator versions, crash recovery can be done manually.

## Automatic Crash Recovery

Crash recovery can be done automatically. This behavior is controlled by the `pxc.autoRecovery` option in the `deploy/cr.yaml` configuration file.

The default value for this option is `true`, which means that automatic recovery is turned on.

If this option is set to `false`, automatic crash recovery is not done, but semi-automatic recovery is still possible.

In this case you need to get the log from pxc container from all Pods using the following command:

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1)); do echo "#####cluster1-pxc-$i#####"; kubectl logs cluster1-pxc-$i -c pxc | grep '(seqno):' ; done
```

The output of this command should be similar to the following one:

```
#####cluster1-pxc-0#####  
It is cluster1-pxc-0.cluster1-pxc.default.svc.cluster.local node with sequence number (seqno): 18  
#####cluster1-pxc-1#####  
It is cluster1-pxc-1.cluster1-pxc.default.svc.cluster.local node with sequence number (seqno): 18  
#####cluster1-pxc-2#####  
It is cluster1-pxc-2.cluster1-pxc.default.svc.cluster.local node with sequence number (seqno): 19
```

Now find the Pod with the largest `seqno` (it is `cluster1-pxc-2` in the above example).

Now execute the following commands to start this instance:

```
$ kubectl exec cluster1-pxc-2 -c pxc -- sh -c 'kill -s USR1 1'
```

## Manual Crash Recovery

### Warning

This method includes a lot of operations, and therefore, it is intended for advanced users only!

This method involves the following steps:

- swap the original Percona XtraDB Cluster image with the [debug image](#), which does not reboot after the crash, and force all Pods to run it,
- find the Pod with the most recent Percona XtraDB Cluster data, run recovery on it, start `mysqld`, and allow the cluster to be restarted,

- revert all temporary substitutions.

Let's assume that a full crash did occur for the cluster named `cluster1`, which is based on three Percona XtraDB Cluster Pods.

**Note**

The following commands are written for Percona XtraDB Cluster 8.0. The same steps are also for Percona XtraDB Cluster 5.7 unless specifically indicated otherwise.

1. Check the current Update Strategy with the following command to make sure [Smart Updates](#) are turned off during the recovery:

```
$ kubectl get pxc cluster1 -o jsonpath='{.spec.updateStrategy}'
```

If the returned value is `SmartUpdate`, please change it to `onDelete` with the following command:

```
$ kubectl patch pxc cluster1 --type=merge --patch '{"spec": {"updateStrategy": "onDelete" }}'
```

2. Change the normal PXC image inside the cluster object to the debug image:

**Note**

Please make sure the Percona XtraDB Cluster version for the debug image matches the version currently in use in the cluster. You can run the following command to find out which Percona XtraDB Cluster image is in use:

```
$ kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.image}'
```

```
$ kubectl patch pxc cluster1 --type="merge" -p '{"spec":{"pxc":{"image":"percona/percona-xtradb-cluster:8.0.41-32.1-debug"}}}'
```

**Note**

For Percona XtraDB Cluster 5.7 this command should be as follows:

```
$ kubectl patch pxc cluster1 --type="merge" -p '{"spec":{"pxc":{"image":"percona/percona-xtradb-cluster:5.7.44-31.65-debug"}}}'
```

1. Restart all Pods:

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1))); do kubectl delete pod cluster1-pxc-$i --force --grace-period=0; done
```

2. Wait until the Pod `0` is ready, and execute the following code (it is required for the Pod liveness check):

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1))); do until [[ $(kubectl get pod cluster1-pxc-$i -o jsonpath='{.status.phase}') == 'Running' ]]; do sleep 10; done; kubectl exec cluster1-pxc-$i -- touch /var/lib/mysql/sst_in_progress; done
```

3. Wait for all Percona XtraDB Cluster Pods to start, and execute the following code to make sure no `mysqld` processes are running:

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1))); do pid=$(kubectl exec cluster1-pxc-$i -- ps -C mysqld-ps -o pid=); if [[ -n "$pid" ]]; then kubectl exec cluster1-pxc-$i -- kill -9 $pid; fi; done
```

4. Wait for all Percona XtraDB Cluster Pods to start, then find the Percona XtraDB Cluster instance with the most recent data - i.e. the one with the highest [sequence number \(seqno\)](#):

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1))); do echo "#####cluster1-pxc-$i#####"; kubectl exec cluster1-pxc-$i -- cat /var/lib/mysql/grastate.dat; done
```

The output of this command should be similar to the following one:

```
#####cluster1-pxc-0#####
# GALERA saved state
version: 2.1
uuid: 7e037079-6517-11ea-a558-8e77af893c93
seqno: 18
safe_to_bootstrap: 0
#####cluster1-pxc-1#####
# GALERA saved state
version: 2.1
uuid: 7e037079-6517-11ea-a558-8e77af893c93
seqno: 18
safe_to_bootstrap: 0
#####cluster1-pxc-2#####
# GALERA saved state
version: 2.1
uuid: 7e037079-6517-11ea-a558-8e77af893c93
seqno: 19
safe_to_bootstrap: 0
```

Now find the Pod with the largest seqno (it is cluster1-pxc-2 in the above example).

5. Now execute the following commands *in a separate shell* to start this instance:

```
$ kubectl exec cluster1-pxc-2 -- mysqld --wsrep_recover
$ kubectl exec cluster1-pxc-2 -- sed -i 's/safe_to_bootstrap: 0/safe_to_bootstrap: 1/g' /var/lib/mysql/grastate.dat
$ kubectl exec cluster1-pxc-2 -- sed -i 's/wsrep_cluster_address=.*wsrep_cluster_address=gcomm://\//g'
/etc/mysql/node.cnf
$ kubectl exec cluster1-pxc-2 -- mysqld
```

The `mysqld` process will initialize the database once again, and it will be available for the incoming connections.

6. Go back to *the previous shell* and return the original Percona XtraDB Cluster image because the debug image is no longer needed:

#### Note

Please make sure the Percona XtraDB Cluster version for the debug image matches the version currently in use in the cluster.

```
$ kubectl patch pxc cluster1 --type="merge" -p '{"spec":{"pxc":{"image":"percona/percona-xtradb-cluster:8.0.41-32.1"}}}'
```

#### Note

For Percona XtraDB Cluster 5.7 this command should be as follows:

```
$ kubectl patch pxc cluster1 --type="merge" -p '{"spec":{"pxc":{"image":"percona/percona-xtradb-cluster:5.7.44-31.65"}}}'
```

1. Restart all Pods besides the `cluster1-pxc-2` Pod (the recovery donor).

```
$ for i in $(seq 0 $(($(kubectl get pxc cluster1 -o jsonpath='{.spec.pxc.size}')-1)); do until [[ $(kubectl get pod cluster1-pxc-$i -o jsonpath='{.status.phase}') == 'Running' ]]; do sleep 10; done; kubectl exec cluster1-pxc-$i -- rm /var/lib/mysql/sst_in_progress; done
$ kubectl delete pods --force --grace-period=0 cluster1-pxc-0 cluster1-pxc-1
```

2. Wait for the successful startup of the Pods which were deleted during the previous step, and finally remove the `cluster1-pxc-2` Pod:

```
$ kubectl delete pods --force --grace-period=0 cluster1-pxc-2
```

3. After the Pod startup, the cluster is fully recovered.

#### Note

If you have changed the update strategy on the 1<sup>st</sup> step, don't forget to revert it back to `SmartUpdate` with the following command:

```
$ kubectl patch pxc cluster1 --type=merge --patch '{"spec": {"updateStrategy": "SmartUpdate" }}'
```



## Clone a cluster with the same data set

A good practice is to test a new functionality or an upgraded version of the database in a testing / staging environment. As a developer, you would want the data in the staging database cluster, so that your applications can start immediately.

The [dataSource](#) functionality allows doing just that. Instead of creating a new PVC for a new cluster, you can clone the existing one. This enables you to spin up a new cluster with the data in it almost in no time which is especially beneficial if you use CI/CD for that.

For example, you have the production Percona XtraDB Cluster `cluster1`. To test a new feature in your app, you need a staging cluster `cluster2` with the data set from `cluster1`.

To create it, create the `cluster2-cr.yaml` Custom Resource manifest. You can use the existing [deploy/cr.yaml](#) for convenience. Specify the PVC from `cluster1` as the `dataSource` for it:

```
pxc:
  volumeSpec:
    persistentVolumeClaim:
      dataSource:
        name: cluster1-pvc
        kind: PersistentVolumeClaim
```

This configuration instructs the Operator to create a direct clone of the PVC from `cluster1`. If you have a snapshot of the PVC, you can use that as a data source for your staging cluster. Here's how you define it:

```
persistentVolumeClaim:
  dataSource:
    name: cluster1-pvc-snapshot1
    kind: VolumeSnapshot
    apiGroup: snapshot.storage.k8s.io
```

To create a database cluster, apply the `cluster2-cr.yaml`.

# Troubleshooting

# Initial troubleshooting

Percona Operator for MySQL uses [Custom Resources](#) to manage options for the various components of the cluster.

- `PerconaXtraDBCluster` Custom Resource with Percona XtraDB Cluster options (it has handy `pxc` shortname also),
- `PerconaXtraDBClusterBackup` and `PerconaXtraDBClusterRestore` Custom Resources contain options for Percona XtraBackup used to backup Percona XtraDB Cluster and to restore it from backups (`pxc-backup` and `pxc-restore` shortnames are available for them).

The first thing you can check for the Custom Resource is to query it with `kubectl get` command:

```
$ kubectl get pxc
```

## Expected output

| NAME     | ENDPOINT                 | STATUS | PXC | PROXYSQL | HAPROXY | AGE |
|----------|--------------------------|--------|-----|----------|---------|-----|
| cluster1 | cluster1-haproxy.default | ready  | 3   |          | 3       | 33d |

The Custom Resource should have `Ready` status.

## Note

You can check which Percona's Custom Resources are present and get some information about them as follows:

```
$ kubectl api-resources | grep -i percona
```

## Expected output

|                              |                           |                    |      |                      |
|------------------------------|---------------------------|--------------------|------|----------------------|
| perconaxtradbclusterbackups  | pxc-backup, pxc-backups   | pxc.percona.com/v1 | true |                      |
| PerconaXtraDBClusterBackup   |                           |                    |      |                      |
| perconaxtradbclusterrestores | pxc-restore, pxc-restores | pxc.percona.com/v1 | true |                      |
| PerconaXtraDBClusterRestore  |                           |                    |      |                      |
| perconaxtradbclusters        | pxc, pxcs                 | pxc.percona.com/v1 | true | PerconaXtraDBCluster |

## Check the Pods

If Custom Resource is not getting `Ready` status, it makes sense to check individual Pods. You can do it as follows:

```
$ kubectl get pods
```

## Expected output

| NAME   | READY | STATUS  | RESTARTS | AGE   |
|--|-------|---------|----------|-------|
| cluster1-haproxy-0                               | 2/2   | Running | 0        | 6m17s |
| cluster1-haproxy-1                               | 2/2   | Running | 0        | 4m59s |
| cluster1-haproxy-2                               | 2/2   | Running | 0        | 4m36s |
| cluster1-pxc-0                                   | 3/3   | Running | 0        | 6m17s |
| cluster1-pxc-1                                   | 3/3   | Running | 0        | 5m3s  |
| cluster1-pxc-2                                   | 3/3   | Running | 0        | 3m56s |
| percona-xtradb-cluster-operator-79966668bd-rswbk | 1/1   | Running | 0        | 9m54s |

The above command provides the following insights:

- `READY` indicates how many containers in the Pod are ready to serve the traffic. In the above example, `cluster1-haproxy-0` Pod has all two containers ready (2/2). For an application to work properly, all containers of the Pod should be ready.
- `STATUS` indicates the current status of the Pod. The Pod should be in a `Running` state to confirm that the application is working as expected. You can find out other possible states in the [official Kubernetes documentation](#).
- `RESTARTS` indicates how many times containers of Pod were restarted. This is impacted by the [Container Restart Policy](#). In an ideal world, the restart count would be zero, meaning no issues from the beginning. If the restart count exceeds zero, it may be reasonable to check why it happens.

- AGE: Indicates how long the Pod is running. Any abnormality in this value needs to be checked.

You can find more details about a specific Pod using the `kubectl describe pods <pod-name>` command.

```
$ kubectl describe pods cluster1-pxc-0
```

#### Expected output

```
...
Name:          cluster1-pxc-0
Namespace:     default
...
Controlled By: StatefulSet/cluster1-pxc
Init Containers:
  pxc-init:
  ...
Containers:
  pmm-client:
  ...
  pxc:
  ...
  Restart Count: 0
Limits:
  cpu:    1
  memory: 2G
Requests:
  cpu:    1
  memory: 2G
Liveness:  exec [/var/lib/mysql/liveness-check.sh] delay=300s timeout=5s period=10s #success=1 #failure=3
Readiness: exec [/var/lib/mysql/readiness-check.sh] delay=15s timeout=15s period=30s #success=1 #failure=5
Environment Variables from:
  pxc-env-vars-pxc Secret Optional: true
Environment:
...
Mounts:
...
Volumes:
...
Events:          <none>
```

This gives a lot of information about containers, resources, container status and also events. So, describe output should be checked to see any abnormalities.

## Exec into the containers

If you want to examine the contents of a container “in place” using remote access to it, you can use the `kubectl exec` command. It allows you to run any command or just open an interactive shell session in the container. Of course, you can have shell access to the container only if container supports it and has a “Running” state.

In the following examples we will access the container `pxc` of the `cluster1-pxc-0` Pod.

- Run `date` command:

```
$ kubectl exec -ti cluster1-pxc-0 -c pxc -- date
```

### Expected output

```
Thu Nov 24 10:01:17 UTC 2022
```

You will see an error if the command is not present in a container. For example, trying to run the `time` command, which is not present in the container, by executing `kubectl exec -ti cluster1-pxc-0 -c pxc -- time` would show the following result:

```
error: Internal error occurred: error executing command in container: failed to exec in container: failed to start exec "71bdb96a65af89d3672cd0d69a8f2c1068542a97b1938e7f6f17d29a87d76453": OCI runtime exec failed: exec failed: unable to start container process: exec: "time": executable file not found in $PATH: unknown
```

- Print `/var/log/mysqlld.log` file to a terminal:

```
$ kubectl exec -ti cluster1-pxc-0 -c pxc -- cat /var/log/mysqlld.log
```

- Similarly, opening an Interactive terminal, executing a pair of commands in the container, and exiting it may look as follows:

```
$ kubectl exec -ti cluster1-pxc-0 -c pxc -- bash
bash-4.4$ hostname
cluster1-pxc-0
bash-4.4$ ls /var/log/mysqlld.log
/var/log/mysqlld.log
bash-4.4$ exit
exit
$
```

## Avoid the restart-on-fail loop for Percona XtraDB Cluster containers

The restart-on-fail loop takes place when the container entry point fails (e.g. `mysqld` crashes). In such a situation, Pod is continuously restarting. Continuous restarts prevent to get console access to the container, and so a special approach is needed to make fixes.

You can prevent such infinite boot loop by putting the Percona XtraDB Cluster containers into the infinity loop *without* starting `mysqld`. This behavior of the container entry point is triggered by the presence of the `/var/lib/mysql/sleep-forever` file.

For example, you can do it for the `pxc` container of an appropriate Percona XtraDB Cluster instance as follows:

```
$ kubectl exec -it cluster1-pxc-0 -c pxc -- sh -c 'touch /var/lib/mysql/sleep-forever'
```

If `pxc` container can't start, you can use `logs` container instead:

```
$ kubectl exec -it cluster1-pxc-0 -c logs -- sh -c 'touch /var/lib/mysql/sleep-forever'
```

The instance will restart automatically and run in its usual way as soon as you remove this file (you can do it with a command similar to the one you have used to create the file, just substitute `touch` to `rm` in it).

# Check the Events

[Kubernetes Events](#)  always provide a wealth of information and should always be checked while troubleshooting issues.

Events can be checked by the following command

```
$ kubectl get events
```

## Expected output



| LAST SEEN | TYPE   | REASON       | OBJECT  | MESSAGE   |
|-----------|--------|--------------|---|---|
| 38m       | Normal | Provisioning | persistentvolumeclaim/xb-cron-pxc-pxc-backup-stora-202211231300-3qf7g | External provisioner is provisioning volume for claim "default/xb-cron-pxc-pxc-backup-stora-202211231300-3qf7g" |
| ...       |        |              |   |   |

Events capture many information happening at Kubernetes level and provide valuable information. By default, the ordering of events cannot be guaranteed. Use the following command to sort the output in a reverse chronological fashion.

```
$ kubectl get events --sort-by=".lastTimestamp"
```

## Expected output

| LAST SEEN | TYPE   | REASON    | OBJECT   | MESSAGE                      |
|-----------|--------|-----------|--|------------------------------|
| 13m       | Normal | Created   | pod/xb-cron-pxc-pxc-backup-stora-2022112313300-3qf7g-brxmv | Created container xtrabackup |
| 13m       | Normal | Started   | pod/xb-cron-pxc-pxc-backup-stora-2022112313300-3qf7g-brxmv | Started container xtrabackup |
| 12m       | Normal | Completed | job/xb-cron-pxc-pxc-backup-stora-2022112313300-3qf7g       | Job completed                |
| ...       |        |           |  |                              |

When there are too many events and there is a need of filtering output, tools like [yq](#) , [jq](#)  can be used to filter specific items or know the structure of the events.

Example:

```
$ kubectl get events -oyaml | yq .items[0]
```

## Expected output

```
apiVersion: v1
count: 2
eventTime: null
firstTimestamp: "2022-11-24T05:30:00Z"
involvedObject:
  apiVersion: v1
  kind: Pod
  name: xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s
  namespace: default
  resourceVersion: "41813970"
  uid: c2463e2a-65a0-4fc2-b5c3-86d88bba6b5b
kind: Event
lastTimestamp: "2022-11-24T05:30:03Z"
message: '0/6 nodes are available: 6 pod has unbound immediate PersistentVolumeClaims.'
metadata:
  creationTimestamp: "2022-11-24T05:30:00Z"
  name: xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s.172a6e3851f6710c
  namespace: default
  resourceVersion: "94245"
  uid: d56ea5b8-3b15-4a22-a6ea-a4f641fcc54e
reason: FailedScheduling
reportingComponent: ""
reportingInstance: ""
source:
  component: default-scheduler
  type: Warning
```

Flag `--field-selector` can be used to filter out the output as well. For example, the following command provides events of Pod only:

```
$ kubectl get events --field-selector involvedObject.kind=Pod
```

More fields can be added to the field-selector flag for filtering events further. Example: the following command provides events of Pod by name `xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s`.

```
$ kubectl get events --field-selector involvedObject.kind=Pod,involvedObject.name=xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s
```

#### Expected output

| LAST SEEN | TYPE    | REASON            | OBJECT  | MESSAGE   |
|-----------|---------|-------------------|---|---|
| 53m       | Warning | FailedScheduling  | pod/xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s | 0/6 nodes are available: 6 pod has unbound immediate PersistentVolumeClaims.    |
| 53m       | Normal  | NotTriggerScaleUp | pod/xb-cron-pxc-pxc-backup-stora-202211245300-3qf7g-bpm5s | pod didn't trigger scale-up: 3 pod has unbound immediate PersistentVolumeClaims |

Same way you can query events for other Kubernetes object (StatefulSet, Custom Resource, etc.) to investigate any problems to them:

```
$ kubectl get events --field-selector involvedObject.kind=PerconaXtraDBCluster,involvedObject.name=cluster1
```

#### Expected output

| LAST SEEN | TYPE    | REASON                   | OBJECT                      | MESSAGE                             |
|-----------|---------|--------------------------|-----------------------------|-------------------------------------|
| 10m       | Warning | AsyncReplicationNotReady | perconaservermysql/cluster1 | cluster1-mysql-1: [not_replicating] |
| ...       |         |                          |                             |                                     |

Alternatively, you can see events for a specific object in the output of `kubectl describe` command:

```
$ kubectl describe ps cluster1
```

#### Expected output

```
Name:          cluster1
...
Events:
  Type           Reason              Age             From           Message
  ----           -
  Warning        AsyncReplicationNotReady 10m (x23 over 13m)  ps-controller  cluster1-mysql-1: [not_replicating]
...
```

Check `kubectl get events --help` to know about more options.

#### Note

It is important to note that events are stored in the etcd for only 60 minutes. Ensure that events are checked within 60 minutes of the issue. Kubernetes cluster administrators might also use event exporters for storing the events.

## Check the Logs

Logs provide valuable information. It makes sense to check the logs of the database Pods and the Operator Pod. Following flags are helpful for checking the logs with the `kubectl logs` command:

| Flag  | Description   |
|---|---|
| <code>--container=&lt;container-name&gt;</code> | Print log of a specific container in case of multiple containers in a Pod   |
| <code>--follow</code>                           | Follows the logs for a live output  |
| <code>--since=&lt;time&gt;</code>               | Print logs newer than the specified time, for example: <code>--since="10s"</code>   |
| <code>--timestamps</code>                       | Print timestamp in the logs (timezone is taken from the container)  |
| <code>--previous</code>                         | Print previous instantiation of a container. This is extremely useful in case of container restart, where there is a need to check the logs on why the container restarted. Logs of previous instantiation might not be available in all the cases. |

In the following examples we will access containers of the `cluster1-pxc-0` Pod.

- Check logs of the `pxc` container:

```
$ kubectl logs cluster1-pxc-0 -c pxc
```

- Check logs of the `pmm-client` container:

```
$ kubectl logs cluster1-pxc-0 -c pmm-client
```

- Filter logs of the `pxc` container which are not older than 600 seconds:

```
$ kubectl logs cluster1-pxc-0 -c pxc --since=600s
```

- Check logs of a previous instantiation of the `pxc` container, if any:

```
$ kubectl logs cluster1-pxc-0 -c pxc --previous
```

- Check logs of the `pxc` container, parsing the output with [jq JSON processor](#):

```
$ kubectl logs cluster1-pxc-0 -c pxc -f | jq -R 'fromjson?'
```

## Cluster-level logging

Cluster-level logging involves collecting logs from all Percona XtraDB Cluster Pods in the cluster to some persistent storage. This feature gives the logs a lifecycle independent of nodes, Pods and containers in which they were collected. Particularly, it ensures that Pod logs from previous failures are available for later review.

Log collector is turned on by the `logcollector.enabled` key in the `deploy/cr.yaml` configuration file (`true` by default).

The Operator collects logs using [Fluent Bit Log Processor](#), which supports many output plugins and has broad forwarding capabilities. If necessary, Fluent Bit filtering and advanced features can be configured via the `logcollector.configuration` key in the `deploy/cr.yaml` configuration file.

Logs are stored for 7 days and then rotated.

Collected logs can be examined using the following command:

```
$ kubectl logs cluster1-pxc-0 -c logs
```



 **Note**

Technically, logs are stored on the same Persistent Volume, which is used with the corresponding Percona XtraDB Cluster Pod. Therefore collected logs can be found in `DATADIR` (`var/lib/mysql/`). Also, there is an additional Secrets object for Fluent Bit passwords and other similar data, e.g. for output plugins. The name of this Secrets object can be found in the `logCollectorSecretName` option of the Custom Resource (it is set to `my-log-collector-secrets` in the `deploy/cr.yaml` configuration file by default).

# Check Storage-related objects

Storage-related objects worth to check in case of problems are the following ones:

- [Persistent Volume Claims \(PVC\) and Persistent Volumes \(PV\)](#), which are playing a key role in stateful applications.
- [Storage Class](#), which automates the creation of Persistent Volumes and the underlying storage.

It is important to remember that PVC is namespace-scoped, but PV and Storage Class are cluster-scoped.

## Check the PVC

You can check all the PVC with the following command (use your namespace name instead of the `<namespace>` placeholder):

```
$ kubectl get pvc -n <namespace>
```

### Expected output

| NAME              | STATUS | VOLUME                                   | CAPACITY | ACCESS MODES | STORAGECLASS | AGE |
|-------------------|--------|--|----------|--------------|--------------|-----|
| datadir-pxc-pxc-0 | Bound  | pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b | 24Gi     | RWO          | standard     | 42d |
| datadir-pxc-pxc-1 | Bound  | pvc-3ec336a8-69de-4cbc-aff8-700d41696447 | 24Gi     | RWO          | standard     | 42d |
| datadir-pxc-pxc-2 | Bound  | pvc-207e8a3e-1c83-4eae-b3f2-cf126f89ba9e | 24Gi     | RWO          | standard     | 42d |

The fields in the output of this command provide the following insights:

- **STATUS:** shows the [state](#) of the PVC:
  - For normal working of an application, the status should be `Bound`.
  - If the status is not `Bound`, further investigation is required.
- **VOLUME:** is the name of the Persistent Volume with which PVC is Bound to. Obviously, this field will be occupied only when a PVC is Bound.
- **CAPACITY:** it is the size of the volume claimed.
- **STORAGECLASS:** it indicates the [Kubernetes storage class](#) used for dynamic provisioning of Volume.
- **ACCESS MODES:** [Access mode](#) indicates how Volume is used with the Pods. Access modes should have write permission if the application needs to write data, which is obviously true in case of databases.

Now you can check a specific PVC for more details using its name as follows:

```
$ kubectl get pvc datadir-pxc-pxc-0 -n <namespace> -oyaml # output stripped for brevity, name of PVC may vary
```

### Expected output

```
apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  ...
  name: datadir-pxc-pxc-0
  namespace: default
  ...
spec:
  accessModes:
  - ReadWriteOnce
  resources:
    requests:
      storage: 25G
  storageClassName: standard
  volumeMode: Filesystem
  volumeName: pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b
status:
  accessModes:
  - ReadWriteOnce
  capacity:
    storage: 24Gi
  phase: Bound
```

## Check the PV

It is important to remember that PV is a cluster-scoped Object. If you see any issues with attaching a Volume to a Pod, PV and PVC might be looked upon.

Check all the PV present in the Kubernetes cluster as follows:

```
$ kubectl get pv
```

### Expected output

| NAME                                     | STORAGECLASS | REASON | AGE | CAPACITY | ACCESS MODES | RECLAIM POLICY | STATUS | CLAIM                     |
|--|--------------|--------|-----|----------|--------------|----------------|--------|---------------------------|
| pvc-207e8a3e-1c83-4eae-b3f2-cf126f89ba9e | standard     |        | 43d | 24Gi     | RWO          | Delete         | Bound  | default/datadir-pxc-pxc-2 |
| pvc-3ec336a8-69de-4cbc-aff8-700d41696447 | standard     |        | 43d | 24Gi     | RWO          | Delete         | Bound  | default/datadir-pxc-pxc-1 |
| pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b | standard     |        | 43d | 24Gi     | RWO          | Delete         | Bound  | default/datadir-pxc-pxc-0 |

Now you can check a specific PV for more details using its name as follows:

```
$ kubectl get pv pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b -oyaml
```

### Expected output

```
apiVersion: v1
kind: PersistentVolume
metadata:
  ...
  name: pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b
  ...
spec:
  accessModes:
  - ReadWriteOnce
  capacity:
    storage: 24Gi
  claimRef:
    apiVersion: v1
    kind: PersistentVolumeClaim
    name: datadir-pxc-pxc-0
    namespace: default
    resourceVersion: "912868"
    uid: f3e7097f-accd-4f5d-9c9d-6f29b54a368b
  gcePersistentDisk:
    fsType: ext4
    pdName: pvc-f3e7097f-accd-4f5d-9c9d-6f29b54a368b
  nodeAffinity:
    required:
      nodeSelectorTerms:
      - matchExpressions:
        - key: topology.kubernetes.io/zone
          operator: In
          values:
          - us-central1-a
        - key: topology.kubernetes.io/region
          operator: In
          values:
          - us-central1
    persistentVolumeReclaimPolicy: Delete
    storageClassName: standard
    volumeMode: Filesystem
  status:
    phase: Bound
```

Fields to check if there are any issues in binding with PVC, are the `claimRef` and `nodeAffinity`.

The `claimRef` one indicates to which PVC this volume is bound to. This means that if by any chance PVC is deleted (e.g. by the appropriate finalizer), this section needs to be modified so that it can bind to a new PVC.

The `spec.nodeAffinity` field may influence the PV availability as well: for example, it can make Volume accessed in one availability zone only.

## Check the StorageClass

StorageClass is also a cluster-scoped object, and it indicates what type of underlying storage is used for the Volumes.

You can set StorageClass in `pxc.volumeSpec.persistentVolumeClaim.storageClassName`, `proxysql.volumeSpec.persistentVolumeClaim.storageClassName`, and `backup.storages.STORAGE-NAME.persistentVolumeClaim.storageClassName` Custom Resource options.

The following command checks all the storage class present in the Kubernetes cluster, and allows to see which storage class is the default one:

```
$ kubectl get sc
```

### Expected output

| NAME               | PROVISIONER           | RECLAIMPOLICY | VOLUMEBINDINGMODE    | ALLOWVOLUMEEXPANSION | AGE |
|--------------------|-----------------------|---------------|----------------------|----------------------|-----|
| premium-rwo        | pd.csi.storage.gke.io | Delete        | WaitForFirstConsumer | true                 | 44d |
| standard (default) | kubernetes.io/gce-pd  | Delete        | Immediate            | true                 | 44d |
| standard-rwo       | pd.csi.storage.gke.io | Delete        | WaitForFirstConsumer | true                 | 44d |

If some PVC does not refer any storage class explicitly, it means that the default storage class is used. Ensure there is only one default Storage class.

You can check a specific storage class as follows:

```
$ kubectl get sc standard -oyaml
```

### Expected output

```
allowVolumeExpansion: true
apiVersion: storage.k8s.io/v1
kind: StorageClass
metadata:
  annotations:
    storageclass.kubernetes.io/is-default-class: "true"
  creationTimestamp: "2022-10-09T06:28:03Z"
  labels:
    addonmanager.kubernetes.io/mode: EnsureExists
  name: standard
  resourceVersion: "906"
  uid: 933d37db-990b-4b2d-bf3a-dd091d0b00ae
parameters:
  type: pd-standard
provisioner: kubernetes.io/gce-pd
reclaimPolicy: Delete
volumeBindingMode: Immediate
```

Important things to observe here are the following ones:

- Check if the provisioner and parameters are indicating the type of storage you intend to provision.
- Check the [volumeBindingMode](#) especially if the storage cannot be accessed across availability zones. "WaitForFirstConsumer" volumeBindingMode ensures volume is provisioned only after a Pod requesting the Volume is created.
- If you are going to rely on the Operator [storage scaling functionality](#), ensure the storage class supports PVC expansion (it should have `allowVolumeExpansion: true` in the output of the above command).

## Special debug images

For the cases when Pods are failing for some reason or just show abnormal behavior, the Operator can be used with a special *debug images*. Percona XtraDB Cluster debug image has the following specifics:

- it avoids restarting on fail,
- it contains additional tools useful for debugging (sudo, telnet, gdb, etc.),
- it has debug mode enabled for the logs.

There are debug versions for all [Percona XtraDB Cluster images](#): they have same names as normal images with a special `-debug` suffix in their version tag: for example, `percona-xtradb-cluster:8.0.41-32.1-debug`.

To use the debug image instead of the normal one, find the needed image name [in the list of certified images](#) and set it for the proper key in the `deploy/cr.yaml` configuration file. For example, set the following value of the `pxc.image` key to use the Percona XtraDB Cluster debug image:

- `percona/percona-xtradb-cluster:8.0.41-32.1-debug` for Percona XtraDB Cluster 8.0,
- `percona/percona-xtradb-cluster:5.7.44-31.65-debug` for Percona XtraDB Cluster 5.7.

The Pod should be restarted to get the new image.

### Note

When the Pod is continuously restarting, you may have to delete it to apply image changes.

# HOWTOs

# Install Percona XtraDB Cluster with customized parameters

You can customize the configuration of Percona XtraDB Cluster and install it with customized parameters.

To check available configuration options, see [deploy/cr.yaml](#) and [Custom Resource Options](#).

## kubectl

To customize the configuration, do the following:

1. Clone the repository with all manifests and source code by executing the following command:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
```

2. Edit the required options and apply the modified `deploy/cr.yaml` file as follows:

```
$ kubectl apply -f deploy/cr.yaml
```

## Helm

To install Percona XtraDB Cluster with custom parameters, use the following command:

```
$ helm install --set key=value
```

You can pass any of the Operator's [Custom Resource options](#) as a `--set key=value[,key=value]` argument.

The following example deploys a Percona XtraDB Cluster in the `pxc` namespace, with disabled backups and 20 Gi storage:

## Command line

```
$ helm install my-db percona/pxc-db --version 1.17.0 --namespace pxc \
--set pxc.volumeSpec.resources.requests.storage=20Gi \
--set backup.enabled=false
```

## YAML file

You can specify customized options in a YAML file instead of using separate command line parameters. The resulting file similar to the following example looks as follows:

### values.yaml

```
allowUnsafeConfigurations: true
sharding:
  enabled: false
pxc:
  size: 3
  volumeSpec:
    pvc:
      resources:
        requests:
          storage: 2Gi
backup:
  enabled: false
```

Apply the resulting YAML file as follows:

```
$ helm install my-db percona/pxc-db --namespace pxc -f values.yaml
```

# Percona Operator for MySQL based on Percona XtraDB Cluster single-namespace and multi-namespace deployment


There are two design patterns that you can choose from when deploying Percona Operator for MySQL based on Percona XtraDB Cluster and database clusters in Kubernetes:

- Namespace-scope - one Operator per Kubernetes namespace,
- Cluster-wide - one Operator can manage clusters in multiple namespaces.

This how-to explains how to configure Percona Operator for MySQL based on Percona XtraDB Cluster for each scenario.

## Namespace-scope

By default, Percona Operator for MySQL functions in a specific Kubernetes namespace. You can create one during the installation (like it is shown in the [installation instructions](#)) or just use the default namespace. This approach allows several Operators to co-exist in one Kubernetes-based environment, being separated in different namespaces:

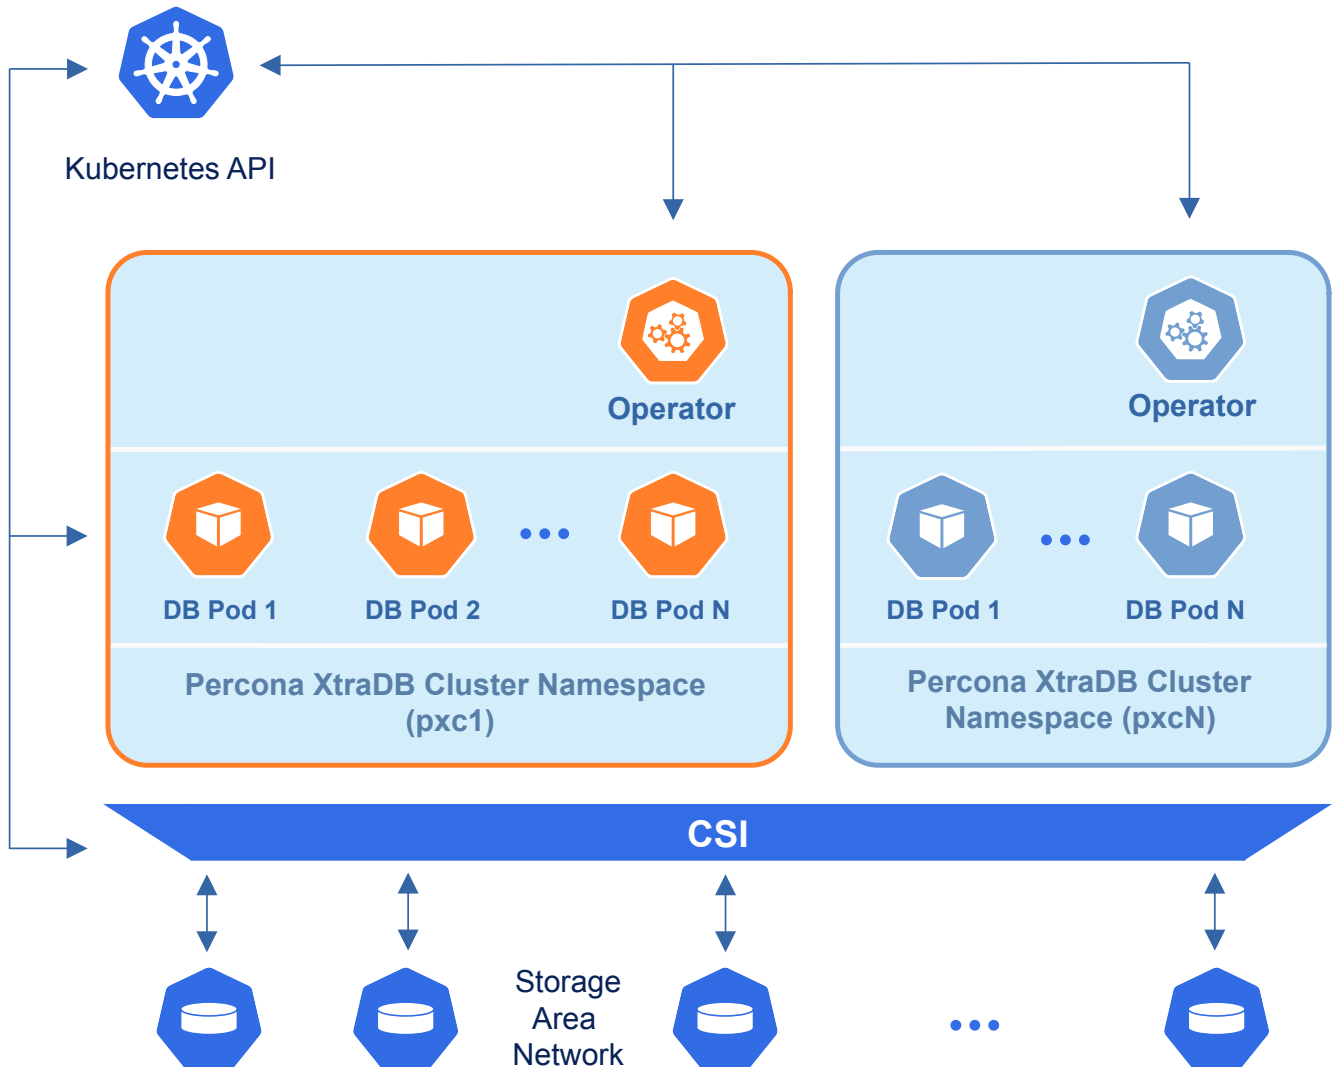

Normally this is a recommended approach, as isolation minimizes impact in case of various failure scenarios. This is the default configuration of our Operator.

Let's say you will use a Kubernetes Namespace called `percona-db-1`.



1. Clone `percona-xtradb-cluster-operator` repository:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
$ cd percona-xtradb-cluster-operator
```

2. Create your `percona-db-1` Namespace (if it doesn't yet exist) as follows:

```
$ kubectl create namespace percona-db-1
```

3. Deploy the Operator [using](#) the following command:

```
$ kubectl apply --server-side -f deploy/bundle.yaml -n percona-db-1
```

4. Once Operator is up and running, deploy the database cluster itself:

```
$ kubectl apply -f deploy/cr.yaml -n percona-db-1
```

You can deploy multiple clusters in this namespace.

## Add more namespaces

What if there is a need to deploy clusters in another namespace? The solution for namespace-scope deployment is to have more than one Operator. We will use the `percona-db-2` namespace as an example.

1. Create your `percona-db-2` namespace (if it doesn't yet exist) as follows:

```
$ kubectl create namespace percona-db-2
```

2. Deploy the Operator:

```
$ kubectl apply --server-side -f deploy/bundle.yaml -n percona-db-2
```

3. Once Operator is up and running deploy the database cluster itself:

```
$ kubectl apply -f deploy/cr.yaml -n percona-db-2
```


### Note

Cluster names may be the same in different namespaces.

## Installing the Operator in cluster-wide mode

Sometimes it is more convenient to have one Operator watching for Percona XtraDB Cluster custom resources in several namespaces.

We recommend running Percona Operator for MySQL in a traditional way, limited to a specific namespace, to limit the blast radius. But it is possible to run it in so-called *cluster-wide* mode, one Operator watching several namespaces, if needed:

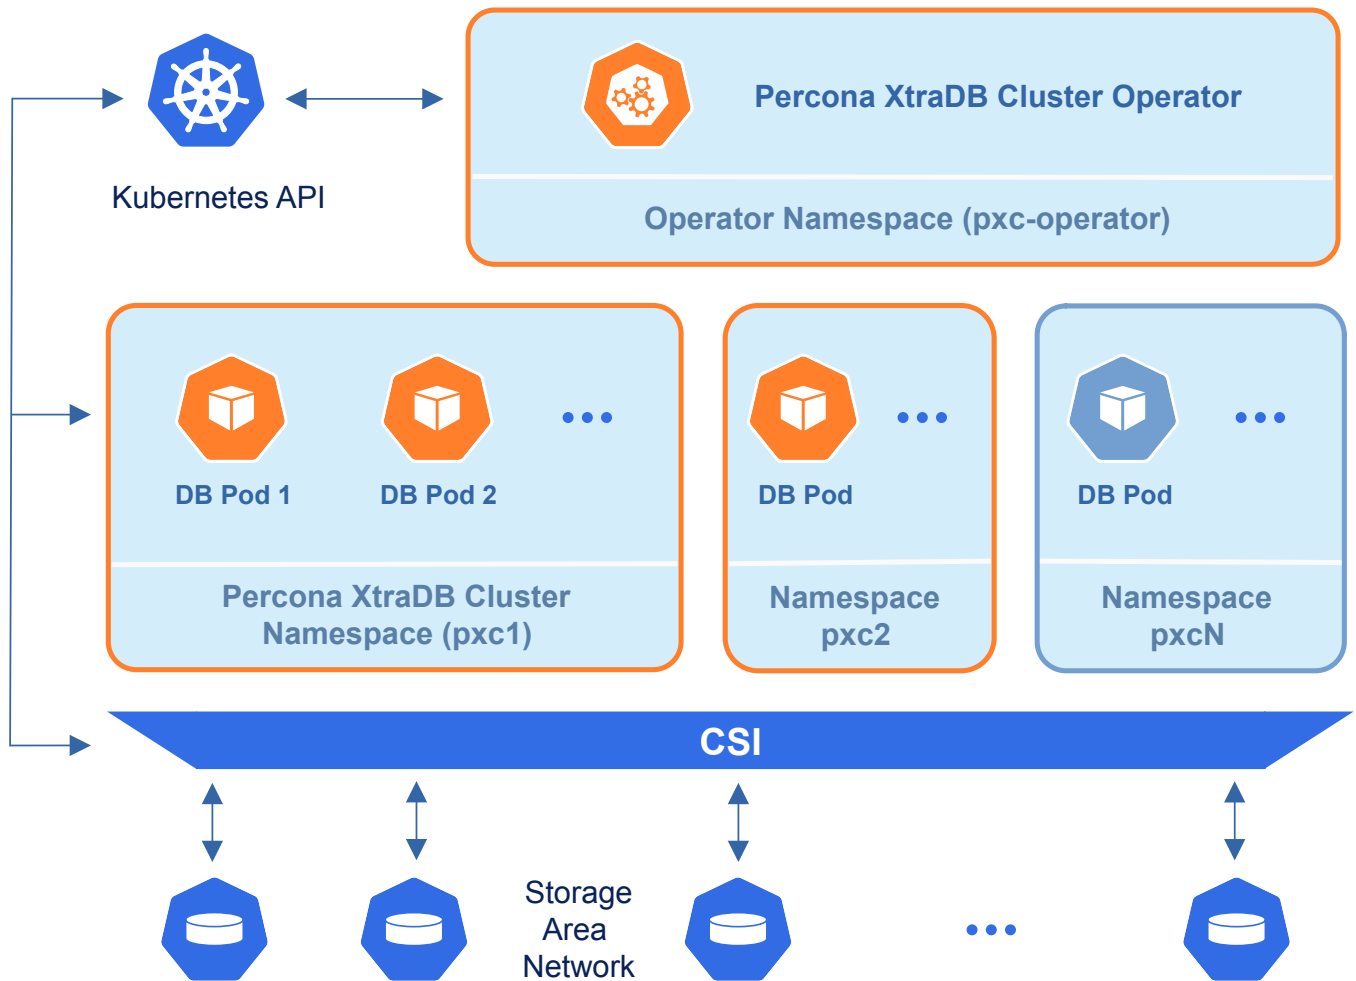

**Note**

Please take into account that if several Operators are configured to watch the same namespace, it is entirely unpredictable which one will get ownership of the Custom Resource in it, so this situation should be avoided.

To use the Operator in such *cluster-wide* mode, you should install it with a different set of configuration YAML files, which are available in the `deploy` folder and have filenames with a special `cw-` prefix: e.g. `deploy/cw-bundle.yaml`.

While using this cluster-wide versions of configuration files, you should set the following information there:

- `subjects.namespace` option should contain the namespace which will host the Operator,
- `WATCH_NAMESPACE` key-value pair in the `env` section should have `value` equal to a comma-separated list of the namespaces to be watched by the Operator (or just a blank string to make the Operator deal with *all namespaces* in a Kubernetes cluster). Prior to the Operator version 1.12.0 it was necessary to mention the Operator's own namespace in the list of watched namespaces, but now this limitation has gone.

**Note**

Installing the Operator cluster-wide on OpenShift via the the Operator Lifecycle Manager (OLM) requires [making different selections in the OLM web-based UI](#) instead of patching YAML files.

The following simple example shows how to install Operator cluster-wide on Kubernetes.

1. First of all, clone the `percona-xtradb-cluster-operator` repository:

```
$ git clone -b v1.17.0 https://github.com/percona/percona-xtradb-cluster-operator
$ cd percona-xtradb-cluster-operator
```

2. Let's suppose that Operator's namespace should be the `pxc-operator` one. Create it as follows:

```
$ kubectl create namespace pxc-operator
```

Namespaces to be watched by the Operator should be created in the same way if not exist. Let's say the Operator should watch the `pxc` namespace:

```
$ kubectl create namespace pxc
```

3. Edit the `deploy/cw-bundle.yaml` configuration file to set proper namespaces:

```
...
subjects:
- kind: ServiceAccount
  name: percona-xtradb-cluster-operator
  namespace: "pxc"
...
env:
- name: WATCH_NAMESPACE
  value: "pxc"
...
```

4. Apply the `deploy/cw-bundle.yaml` file with the following command:

```
$ kubectl apply --server-side -f deploy/cw-bundle.yaml -n pxc-operator
```

5. After the Operator is started, Percona XtraDB Cluster can be created at any time by applying the `deploy/cr.yaml` configuration file, like in the case of normal installation:

```
$ kubectl apply -f deploy/cr.yaml -n pxc
```

The creation process will take some time. When the process is over your cluster will obtain the `ready` status. You can check it with the following command:

```
$ kubectl get pxc
```

| Expected output |                          |        |     |          |         |       |
|-----------------|--------------------------|--------|-----|----------|---------|-------|
| NAME            | ENDPOINT                 | STATUS | PXC | PROXYSQL | HAPROXY | AGE   |
| cluster1        | cluster1-haproxy.default | ready  | 3   |          | 3       | 5m51s |

## Verifying the cluster operation

It may take ten minutes to get the cluster started. When `kubectl get pxc` command finally shows you the cluster status as `ready`, you can try to connect to the cluster.

1. You will need the login and password for the admin user to access the cluster. Use `kubectl get secrets` command to see the list of Secrets objects (by default the Secrets object you are interested in has `cluster1-secrets` name). You can use the following command to get the password of the `root` user:

```
$ kubectl get secrets --namespace=pxc cluster1-secrets --template='{{.data.root | base64decode}}{\n}'
```

2. Run a container with `mysql` client and connect its console output to your terminal. The following command will do this, naming the new Pod `percona-client`:

```
$ kubectl run -i --rm --tty percona-client --image=percona:5.7 --restart=Never --env="POD_NAMESPACE=pxc" -- bash -il
```

Executing it may require some time to deploy the correspondent Pod.

Now run `mysql` tool in the percona-client command shell using the password obtained from the secret instead of the `<root_password>` placeholder. The command will look different depending on whether your cluster provides load balancing with [HAProxy](#) (the default choice) or [ProxySQL](#):

#### with HAProxy (default)

```
$ mysql -h cluster1-haproxy -uroot -p'<root_password>'
```

#### with ProxySQL

```
$ mysql -h cluster1-proxysql -uroot -p'<root_password>'
```

#### Note

Some Kubernetes-based environments are specifically configured to have communication across Namespaces is not allowed by default network policies. In this case, you should specifically allow the Operator communication across the needed Namespaces. Following the above example, you would need to allow ingress traffic for the `pxc-operator` Namespace from the `pxc` Namespace, and also from the `default` Namespace. You can do it with the NetworkPolicy resource, specified in the YAML file as follows:

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: percona
  namespace: pxc-operator
spec:
  ingress:
    - from:
      - namespaceSelector:
          matchLabels:
            kubernetes.io/metadata.name: pxc
      - namespaceSelector:
          matchLabels:
            kubernetes.io/metadata.name: default
  podSelector: {}
  policyTypes:
    - Ingress
```

Don't forget to apply the resulting file with the usual `kubectl apply` command.

You can find more details about Network Policies [in the official Kubernetes documentation](#).

## Upgrading the Operator in cluster-wide mode

Cluster-wide Operator is upgraded similarly to a single-namespace one. Both deployment variants provide you with the same three upgradable components:

- the Operator;
- [Custom Resource Definition \(CRD\)](#),
- Database Management System (Percona XtraDB Cluster).

To upgrade the cluster-wide Operator you follow the [standard upgrade scenario](#) concerning the Operator's namespace and a different YAML configuration file: the one with a special `cw-` prefix, `deploy/cw-rbac.yaml`. The resulting steps will look as follows.

1. Update the [Custom Resource Definition](#) for the Operator, taking it from the official repository on Github, and do the same for the Role-based access control:

```
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/crd.yaml
$ kubectl apply --server-side -f https://raw.githubusercontent.com/percona/percona-xtradb-cluster-operator/v1.17.0/deploy/cw-rbac.yaml
```

2. Now you should [apply a patch](#) to your deployment, supplying the necessary image name with a newer version tag. You can find the proper image name for the current Operator release [in the list of certified images](#) (for older releases, please refer to the [old releases documentation archive](#)). For example, updating to the `1.17.0` version in the `pxc-operator` namespace should look as follows.

```
$ kubectl patch deployment percona-xtradb-cluster-operator \
-p '{"spec":{"template":{"spec":{"containers":[{"name":"percona-xtradb-cluster-operator","image":"percona/percona-xtradb-cluster-operator:1.17.0"}]}}}}' -n pxc-operator
```

3. The deployment rollout will be automatically triggered by the applied patch. You can track the rollout process in real time with the `kubectl rollout status` command with the name of your cluster:

```
$ kubectl rollout status deployments percona-xtradb-cluster-operator -n pxc-operator
```

# Use docker images from a custom registry

Using images from a private Docker registry may be useful in different situations: it may be related to storing images inside of a company, for privacy and security reasons, etc. In such cases, Percona Distribution for MySQL Operator based on Percona XtraDB Cluster allows to use a custom registry, and the following instruction illustrates how this can be done by the example of the Operator deployed in the OpenShift environment.

1. First of all login to the OpenShift and create project.

```
$ oc login
Authentication required for https://192.168.1.100:8443 (openshift)
Username: admin
Password:
Login successful.
$ oc new-project pxc
Now using project "pxc" on server "https://192.168.1.100:8443".
```

2. There are two things you will need to configure your custom registry access:

- the token for your user
- your registry IP address.

The token can be find out with the following command:

```
$ oc whoami -t
AD08CqCDappWR4hxjfdQwijEHei31yXAvWg61Jg210s
```

And the following one tells you the registry IP address:

```
$ kubectl get services/docker-registry -n default
NAME          TYPE        CLUSTER-IP    EXTERNAL-IP  PORT(S)    AGE
docker-registry ClusterIP   172.30.162.173 <none>       5000/TCP   1d
```

3. Now you can use the obtained token and address to login to the registry:

```
$ docker login -u admin -p AD08CqCDappWR4hxjfdQwijEHei31yXAvWg61Jg210s 172.30.162.173:5000
Login Succeeded
```

4. Pull the needed image by its SHA digest:

```
$ docker pull docker.io/perconalab/percona-xtradb-cluster-operator@sha256:841c07eef30605080bfe80e549f9332ab6b9755fcbc42aacbf86e4ac9ef0e444
Trying to pull repository docker.io/perconalab/percona-xtradb-cluster-operator ...
sha256:841c07eef30605080bfe80e549f9332ab6b9755fcbc42aacbf86e4ac9ef0e444: Pulling from docker.io/perconalab/percona-xtradb-cluster-operator
Digest: sha256:841c07eef30605080bfe80e549f9332ab6b9755fcbc42aacbf86e4ac9ef0e444
Status: Image is up to date for docker.io/perconalab/percona-xtradb-cluster-operator@sha256:841c07eef30605080bfe80e549f9332ab6b9755fcbc42aacbf86e4ac9ef0e444
```

You can find correct names and SHA digests in the [current list of the Operator-related images officially certified by Percona](#).

5. The following way is used to push an image to the custom registry (into the OpenShift pxc project):

```
$ docker tag \
  docker.io/perconalab/percona-xtradb-cluster-operator@sha256:841c07eef30605080bfe80e549f9332ab6b9755fcbc42aacbf86e4ac9ef0e444 \
  172.30.162.173:5000/pxc/percona-xtradb-cluster-operator:1.17.0
$ docker push 172.30.162.173:5000/pxc/percona-xtradb-cluster-operator:1.17.0
```

6. Check the image in the OpenShift registry with the following command:

```
$ oc get is
NAME          DOCKER REPO          TAGS
UPDATED
percona-xtradb-cluster-operator  docker-registry.default.svc:5000/pxc/percona-xtradb-cluster-operator  1.17.0  2
hours ago
```

7. When the custom registry image is Ok, put a Docker Repo + Tag string (it should look like `docker-registry.default.svc:5000/pxc/percona-xtradb-cluster-operator:1.17.0`) into the `initImage` option in `deploy/operator.yaml` configuration file.
8. Repeat steps 3-5 for other images, updating the `image\`options` in the corresponding sections of the the ```deploy/cr.yaml`` file.

 **Note**

Don't forget to set [upgradeoptions.apply](#) option to `Disabled`. Otherwise [Smart Upgrade functionality](#) will try using the image recommended by the Version Service instead of the custom one.

Please note it is possible to specify `imagePullSecrets` option for the images, if the registry requires authentication.

9. Now follow the standard [Percona Operator for MySQL installation instruction](#).

# How to restore backup to a new Kubernetes-based environment

The Operator allows restoring a backup not only on the Kubernetes cluster where it was made, but also on any Kubernetes-based environment with the installed Operator.

When restoring to a new Kubernetes-based environment, make sure it has a Secrets object with the same **user passwords** as in the original cluster. More details about secrets can be found in [System Users](#). The name of the required Secrets object can be found out from the `spec.secretsName` key in the `deploy/cr.yaml` (`cluster1-secrets` by default).

To restore a backup, you will use the special restore configuration file. The example of such file is [deploy/backup/restore.yaml](#). The list of options that can be used in it can be found in the [restore options reference](#).

You will need correct names for the **backup** and the **cluster**. If you have access to the original cluster, available backups can be listed with the following command:

```
$ kubectl get pxc-backup
```

And the following command will list available clusters:

```
$ kubectl get pxc
```

## Note

If you have [configured storing binlogs for point-in-time recovery](#), you will have possibility to roll back the cluster to a specific transaction, time (or even skip a transaction in some cases). Otherwise, restoring backups without point-in-time recovery is the only option.

When the correct names for the backup and the cluster are known, backup restoration can be done in the following way.

## Restore the cluster without point-in-time recovery

1. Set appropriate keys in the [deploy/backup/restore.yaml](#) file.
  - set `spec.pxcCluster` key to the name of the target cluster to restore the backup on,
  - set `spec.backupSource` subsection to point on the appropriate PVC, or cloud storage:



## PVC volume

The `storageName` key should contain the storage name (which should be configured in the main CR), and the `destination` key should be equal to the PVC Name:

```
...
backupSource:
  destination: pvc/PVC_VOLUME_NAME
  storageName: pvc
...
```

### Note

If you need a [headless Service](#) for the restore Pod (i.e. restoring from a Persistent Volume in a tenant network), mention this in the `metadata.annotations` as follows:

```
annotations:
  percona.com/headless-service: "true"
...
```

## S3-compatible storage

The `destination` key should have value composed of three parts: the `s3://` prefix, the S3 [bucket](#), and the backup name, which you have already found out using the `kubectl get pxc-backup` command. Also you should add necessary S3 configuration keys, [same](#) as those used to configure S3-compatible storage for backups in the `deploy/cr.yaml` file:

```
...
backupSource:
  destination: s3://S3-BUCKET-NAME/BACKUP-NAME
  s3:
    bucket: S3-BUCKET-NAME
    credentialsSecret: my-cluster-name-backup-s3
    region: us-west-2
    endpointUrl: https://URL-OF-THE-S3-COMPATIBLE-STORAGE
...
```

## Azure Blob storage

The `destination` key should have value composed of three parts: the `azure://` prefix, the Azure Blob [container](#), and the backup name, which you have already found out using the `kubectl get pxc-backup` command. Also you should add necessary Azure configuration keys, [same](#) as those used to configure Azure Blob storage for backups in the `deploy/cr.yaml` file:

```
...
backupSource:
  destination: azure://AZURE-CONTAINER-NAME/BACKUP-NAME
  azure:
    container: AZURE-CONTAINER-NAME
    credentialsSecret: my-cluster-azure-secret
...
```

2. After that, the actual restoration process can be started as follows:

```
$ kubectl apply -f deploy/backup/restore.yaml
```

## Restore the cluster with point-in-time recovery

### Note

Disable the point-in-time functionality on the existing cluster before restoring a backup on it, regardless of whether the backup was made with point-in-time recovery or without it.

1. Set appropriate keys in the [deploy/backup/restore.yaml](#) file.

- set `spec.pxcCluster` key to the name of the target cluster to restore the backup on,
- put additional restoration parameters to the `pitr` section:
  - `type` key can be equal to one of the following options,
    - `date` - roll back to specific date,
    - `transaction` - roll back to a specific transaction (available since Operator 1.8.0),
    - `latest` - recover to the latest possible transaction,
    - `skip` - skip a specific transaction (available since Operator 1.7.0).
  - `date` key is used with `type=date` option and contains value in datetime format,
  - `gtid` key (available since the Operator 1.8.0) is used with `type=transaction` option and contains exact GTID of a transaction **which follows** the last transaction included into the recovery,
- set `spec.backupSource` subsection to point on the appropriate S3-compatible storage. This subsection should contain a `destination` key equal to the s3 bucket with a special `s3://` prefix, followed by necessary S3 configuration keys, [same](#) as in `deploy/cr.yaml` file.

The resulting `restore.yaml` file may look as follows:

```
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster1
  backupName: backup1
  pitr:
    type: date
    date: "2020-12-31 09:37:13"
  backupSource:
    destination: s3://S3-BUCKET-NAME/BACKUP-NAME
    s3:
      bucket: S3-BUCKET-NAME
      credentialsSecret: my-cluster-name-backup-s3
      region: us-west-2
      endpointUrl: https://URL-OF-THE-S3-COMPATIBLE-STORAGE
```

- you can also use a `storageName` key to specify the exact name of the storage (the actual storage should be already defined in the `backup.storages` subsection of the `deploy/cr.yaml` file):

```
...
storageName: s3-us-west
backupSource:
  destination: s3://S3-BUCKET-NAME/BACKUP-NAME
```

2. Run the actual restoration process:

```
$ kubectl apply -f deploy/backup/restore.yaml
```

# How to use backups and asynchronous replication to move an external database to Kubernetes

The Operator enables you to restore a database from a backup made outside of Kubernetes environment to the target Kubernetes cluster using [Percona XtraBackup](#). In such a way you can migrate your external database to Kubernetes. Using [asynchronous replication](#) between source and target environments enables you to reduce downtime and prevent data loss for your application.

This document provides the steps how to migrate Percona Server for MySQL 8.0 deployed on premises to the Kubernetes cluster managed by the Operator using [asynchronous replication](#). We recommend testing this migration in a non-production environment first, before applying it in production.

## Requirements

1. The MySQL version for source and target environments must be 8.0.22 and higher since asynchronous replication is available starting with MySQL version 8.0.22.
2. You must be running [Percona XtraBackup](#) as the backup tool on source environment. For how to install Percona XtraBackup, see the [installation instructions](#).
3. The storage used to save the backup should be one of the [supported cloud storages](#): AWS S3 or compatible storage, or Azure Blob Storage.

## Configure target environment

1. Deploy Percona Operator for MySQL and use it to create Percona XtraDB Cluster following any of the [official installation guides](#).
2. Create the YAML file with the credentials for accessing the storage, needed to create the [Kubernetes Secrets](#) object. As an example here, we will use Amazon S3 storage. You will need to create a Secret with the following data to store backups on the Amazon S3:
  - the `metadata.name` key is the name which you will further use to refer your Kubernetes Secret,
  - the `data.AWS_ACCESS_KEY_ID` and `data.AWS_SECRET_ACCESS_KEY` keys are base64-encoded credentials used to access the storage (obviously these keys should contain proper values to make the access possible).

Create the Secrets file with these base64-encoded keys following the [deploy/backup-s3.yaml](#) example:

```
apiVersion: v1
kind: Secret
metadata:
  name: my-cluster-name-backup-s3
type: Opaque
data:
  AWS_ACCESS_KEY_ID: UkVQTEFDRS1XSVRILUFxUy1BQ0NFU1MtS0VZ
  AWS_SECRET_ACCESS_KEY: UkVQTEFDRS1XSVRILUFxUy1TRUNSRVQtS0VZ
```

### Note

You can use the following command to get a base64-encoded string from a plain text one:

#### in Linux

```
$ echo -n 'plain-text-string' | base64 --wrap=0
```

#### in macOS

```
$ echo -n 'plain-text-string' | base64
```

3. Once the editing is over, create the Kubernetes Secret object as follows:

```
$ kubectl apply -f deploy/backup-s3.yaml
```

4. You will need passwords for the `monitor`, `operator`, `xtrabackup` and `replication` system users created by the Operator. Use `kubectl get secrets` command to see the list of Secrets objects (by default the Secrets object you are interested in has `cluster1-secrets` name). When you know the Secrets name, you can get password for a specific user as follows:

```
$ kubectl get secrets cluster1-secrets --template='{{.data.<user_name> | base64decode}}{"\n"}'
```

Repeat this command 4 times, substituting with `monitor`, `operator`, `xtrabackup` and `replication`. You will further use these passwords when preparing the source environment.

## Prepare the source environment

1. Use official installation instructions for either [Percona Server for MySQL](#) or [Percona XtraDB Cluster](#) to have the database up and running in your source environment (skip this step if one of them is already installed).
2. Use official installation instructions for [Percona XtraBackup](#) to have it up and running in your source environment (skip this step if it is already installed).
3. Configure the replication with Global Transaction Identifiers (GTID). This step is required if you are running Percona Server for MySQL. If you run Percona XtraDB cluster, replication is already configured.

Edit the `my.cnf` configuration file as follows:

```
[mysqld]
enforce_gtid_consistency=ON
gtid_mode=ON
```

4. Create the `monitor`, `operator`, `xtrabackup`, and `replication` system users which will be needed by the Operator to restore a backup. User passwords must match the ones you have found out in your target environment.

Use the following commands to create users with the actual passwords instead of the `monitor_password`, `operator_password`, `xtrabackup_password`, and `replication_password` placeholders:

```
CREATE USER 'monitor'@'%' IDENTIFIED BY 'monitor_password' WITH MAX_USER_CONNECTIONS 100;
GRANT SELECT, PROCESS, SUPER, REPLICATION CLIENT, RELOAD ON *.* TO 'monitor'@'%';
GRANT SERVICE_CONNECTION_ADMIN ON *.* TO 'monitor'@'%';

CREATE USER 'operator'@'%' IDENTIFIED BY 'operator_password';
GRANT ALL ON *.* TO 'operator'@'%' WITH GRANT OPTION;

CREATE USER 'xtrabackup'@'%' IDENTIFIED BY 'xtrabackup_password';
GRANT ALL ON *.* TO 'xtrabackup'@'%';

CREATE USER 'replication'@'%' IDENTIFIED BY 'replication_password';
GRANT REPLICATION SLAVE ON *.* TO 'replication'@'%';
FLUSH PRIVILEGES;
```

## Make a backup in the source environment

1. Export the storage credentials as environment variables. Following the above example, here is a command which shows how to export the AWS S3 credentials:

```
$ export AWS_ACCESS_KEY_ID=XXXXXX
$ export AWS_SECRET_ACCESS_KEY=XXXXXX
```

Don't forget to replace the `XXXX` placeholders with your actual Amazon access key ID and secret access key values.

2. Make the backup of your database and upload it to the storage using [xcloud](#). Replace the values for the `--target-dir`, `--password`, `--s3-bucket` with your values in the following command:

```
$ xtrabackup --backup --stream=xbstream --target-dir=/tmp/backups/ --extra-lsdir=/tmp/backups/ --
password=root_password | xcloud put --storage=s3 --parallel=10 --md5 --s3-bucket="mysql-testing-bucket" "db-test-1"
```

## Restore from a backup in the target environment

If your source database didn't have any data, skip this step and proceed with the [asynchronous replication configuration](#). Otherwise, restore the database in the target environment.

1. To restore a backup, you will use the special restore configuration file. The example of such file is [deploy/backup/restore.yaml](#). For example, your `restore.yaml` file may have the following contents:

```
restore.yaml
apiVersion: pxc.percona.com/v1
kind: PerconaXtraDBClusterRestore
metadata:
  name: restore1
spec:
  pxcCluster: cluster1
  backupSource:
    destination: s3://mysql-testing-bucket/db-test-1
    s3:
      credentialsSecret: my-cluster-name-backup-s3
      region: us-west-2
```

Don't forget to replace the path to the backup and the credentials with your values.

2. Restore from the backup:

```
$ kubectl apply -f restore.yaml
```

You can find more information on restoring backup to a new Kubernetes-based environment and see more examples [in a dedicated HowTo](#).

## Configure asynchronous replication in the Kubernetes cluster

This step will allow you to avoid data loss for your application, configuring the asynchronous replication between the source database and the target cluster.

1. Edit the Custom Resource manifest `deploy/cr.yaml` in your target environment to configure the `spec.pxc.replicationChannels` section.

```
cr.yaml
spec:
  ...
  pxc:
    ...
    replicationChannels:
    - name: ps_to_pxc1
      isSource: false
      sourcesList:
      - host: <source_ip>
        port: 3306
        weight: 100
```

Apply the changes for your Custom Resource as usual:

```
$ kubectl apply -f deploy/cr.yaml
```

2. Verify the replication by connecting to a Percona XtraDB Cluster node. You can do it with `mysql` tool, and you will need the `root` system user password created by the Operator for this. The password can be obtained in a same way we used for other system users:

```
$ kubectl get secrets cluster1-secrets -o yaml -o jsonpath='{.data.root}' | base64 --decode | tr '\n' ' ' && echo " "
```

When you know the `root` password, you can use `kubectl` command as follows (substitute `root_password` with the actual password you have just obtained):

```
$ kubectl exec -it cluster1-pxc-0 -c pxc -- mysql -uroot -proot_password -e "show replica status \G"
```

## Expected output

```
***** 1. row *****
Slave_IO_State: Waiting for master to send event
Master_Host: <ip-of-source-db>
Master_User: replication
Master_Port: 3306
Connect_Retry: 60
Master_Log_File: binlog.000004
Read_Master_Log_Pos: 529
Relay_Log_File: cluster1-pxc-0-relay-bin-ps_to_pxc1.000002
Relay_Log_Pos: 738
Relay_Master_Log_File: binlog.000004
Slave_IO_Running: Yes
Slave_SQL_Running: Yes
Replicate_Do_DB:
Replicate_Ignore_DB:
Replicate_Do_Table:
Replicate_Ignore_Table:
Replicate_Wild_Do_Table:
Replicate_Wild_Ignore_Table:
Last_Errno: 0
Last_Error:
Skip_Counter: 0
Exec_Master_Log_Pos: 529
Relay_Log_Space: 969
Until_Condition: None
Until_Log_File:
Until_Log_Pos: 0
Master_SSL_Allowed: No
Master_SSL_CA_File:
Master_SSL_CA_Path:
Master_SSL_Cert:
Master_SSL_Cipher:
Master_SSL_Key:
Seconds_Behind_Master: 0
Master_SSL_Verify_Server_Cert: No
Last_IO_Errno: 0
Last_IO_Error:
Last_SQL_Errno: 0
Last_SQL_Error:
Replicate_Ignore_Server_Ids:
Master_Server_Id: 1
Master_UUID: 9741945e-148d-11ec-89e9-5ee1a3cf433f
Master_Info_File: mysql.slave_master_info
SQL_Delay: 0
SQL_Remaining_Delay: NULL
Slave_SQL_Running_State: Slave has read all relay log; waiting for more updates
Master_Retry_Count: 3
Master_Bind:
Last_IO_Error_Timestamp:
Last_SQL_Error_Timestamp:
Master_SSL_Crl:
Master_SSL_Crlpath:
Retrieved_Gtid_Set: 9741945e-148d-11ec-89e9-5ee1a3cf433f:1-2
Executed_Gtid_Set: 93f1e7bf-1495-11ec-80b2-06e6016a7c3d:1,
9647dc03-1495-11ec-a385-7e3b2511dacb:1-7,
9741945e-148d-11ec-89e9-5ee1a3cf433f:1-2
Auto_Position: 1
Replicate_Rewrite_DB:
Channel_Name: ps_to_pxc1
Master_TLS_Version:
Master_public_key_path:
Get_master_public_key: 0
Network_Namespace:
```

## Promote the Kubernetes cluster as primary

After you reconfigured your application to work with the new Percona XtraDB Cluster in Kubernetes, you can promote this cluster as primary.

1. Stop the replication. Edit the `deploy/cr.yaml` manifest and comment the `replicationChannels` subsection:

```
cr.yaml
```

```
...
spec:
  ...
  pxc:
    ...
    #replicationChannels:
    #- name: ps_to_pxc1
    # isSource: false
    # sourcesList:
    #   - host: <source_ip>
    #     port: 3306
    #     weight: 100
```


2. Stop the `mysqld` service in your source environment to make sure no new data is written:

```
$ sudo systemctl stop mysqld
```

3. Apply the changes to the Kubernetes cluster in your target environment:

```
$ kubectl apply -f deploy/cr.yaml
```

As a result, replication is stopped and the read-only mode is disabled for the Percona XtraDB Cluster.

This document is based on the blog post [Migration of a MySQL Database to a Kubernetes Cluster Using Asynchronous Replication](#)  by *Slava Sarzhan*.

# Monitor Kubernetes

Monitoring the state of the database is crucial to timely identify and react to performance issues. [Percona Monitoring and Management \(PMM\) solution enables you to do just that.](#)

However, the database state also depends on the state of the Kubernetes cluster itself. Hence it's important to have metrics that can depict the state of the Kubernetes cluster.

This document describes how to set up monitoring of the Kubernetes cluster health. This setup has been tested with the [PMM server](#) as the centralized data storage and the Victoria Metrics Kubernetes monitoring stack as the metrics collector. These steps may also apply if you use another Prometheus-compatible storage.

## Pre-requisites

To set up monitoring of Kubernetes, you need the following:

1. PMM Server up and running. You can run PMM Server as a Docker image, a virtual appliance, or on an AWS instance. Please refer to the [official PMM documentation](#) for the installation instructions.
2. [Helm v3](#).
3. [kubect1](#).
4. The PMM Server API key. The key must have the role "Admin".

Get the PMM API key:

 From PMM UI

[Generate the PMM API key](#)

 From command line

You can query your PMM Server installation for the API Key using `curl` and `jq` utilities. Replace `<login>:<password>@<server_host>` placeholders with your real PMM Server login, password, and hostname in the following command:

```
$ API_KEY=$(curl --insecure -X POST -H "Content-Type: application/json" -d {"name":"operator", "role": "Admin"}'
"https://<login>:<password>@<server_host>/graph/api/auth/keys" | jq .key)
```

 Note

The API key is not rotated.

## Install the Victoria Metrics Kubernetes monitoring stack



## Quick install

1. To install the Victoria Metrics Kubernetes monitoring stack with the default parameters, use the quick install command. Replace the following placeholders with your values:

- `API-KEY` - The [API key of your PMM Server](#)
- `PMM-SERVER-URL` - The URL to access the PMM Server
- `UNIQUE-K8s-CLUSTER-IDENTIFIER` - Identifier for the Kubernetes cluster. It can be the name you defined during the cluster creation.

You should use a unique identifier for each Kubernetes cluster. The use of the same identifier for more than one Kubernetes cluster will result in the conflicts during the metrics collection.

- `NAMESPACE` - The namespace where the Victoria metrics Kubernetes stack will be installed. If you haven't created the namespace before, it will be created during the command execution.

We recommend to use a separate namespace like `monitoring-system`.

```
$ curl -fsL https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/quick-install.sh | bash -s -- --api-key <API-KEY> --pmm-server-url <PMM-SERVER-URL> --k8s-cluster-id <UNIQUE-K8s-CLUSTER-IDENTIFIER> --namespace <NAMESPACE>
```


### Note

The Prometheus node exporter is not installed by default since it requires privileged containers with the access to the host file system. If you need the metrics for Nodes, add the `--node-exporter-enabled` flag as follows:

```
$ curl -fsL https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/quick-install.sh | bash -s -- --api-key <API-KEY> --pmm-server-url <PMM-SERVER-URL> --k8s-cluster-id <UNIQUE-K8s-CLUSTER-IDENTIFIER> --namespace <NAMESPACE> --node-exporter-enabled
```

## Install manually

You may need to customize the default parameters of the Victoria metrics Kubernetes stack.

- Since we use the PMM Server for monitoring, there is no need to store the data in Victoria Metrics Operator. Therefore, the Victoria Metrics Helm chart is installed with the `vm.single.enabled` and `vm.cluster.enabled` parameters set to `false` in this setup.
- [Check all the role-based access control \(RBAC\) rules](#)  of the `victoria-metrics-k8s-stack` chart and the dependencies chart, and modify them based on your requirements.

## Configure authentication in PMM

To access the PMM Server resources and perform actions on the server, configure authentication.

1. Encode the PMM Server API key with base64.

### Linux


```
$ echo -n <API-key> | base64 --wrap=0
```

### macOS

```
$ echo -n <API-key> | base64
```

2. Create the Namespace where you want to set up monitoring. The following command creates the Namespace `monitoring-system`. You can specify a different name. In the latter steps, specify your namespace instead of the `<namespace>` placeholder.

```
$ kubectl create namespace monitoring-system
```

3. Create the YAML file for the [Kubernetes Secrets](#)  and specify the base64-encoded API key value within. Let's name this file `pmm-api-vmoperator.yaml`.

#### pmm-api-vmoperator.yaml

```
apiVersion: v1
data:
  api_key: <base-64-encoded-API-key>
kind: Secret
metadata:
  name: pmm-token-vmoperator
  #namespace: default
type: Opaque
```

4. Create the Secrets object using the YAML file you created previously. Replace the `<filename>` placeholder with your value.

```
$ kubectl apply -f pmm-api-vmoperator.yaml -n <namespace>
```

5. Check that the secret is created. The following command checks the secret for the resource named `pmm-token-vmoperator` (as defined in the `metadata.name` option in the secrets file). If you defined another resource name, specify your value.

```
$ kubectl get secret pmm-token-vmoperator -n <namespace>
```

### Create a ConfigMap to mount for `kube-state-metrics`

The [kubernetes-state-metrics \(KSM\)](#) is a simple service that listens to the Kubernetes API server and generates metrics about the state of various objects - Pods, Deployments, Services and Custom Resources.

To define what metrics the `kube-state-metrics` should capture, create the [ConfigMap](#) and mount it to a container.

Use the [example configmap.yaml configuration file](#) to create the ConfigMap.

```
$ kubectl apply -f https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/ksm-configmap.yaml -n <namespace>
```

As a result, you have the `customresource-config-k8s` ConfigMap created.

### Install the Victoria Metrics Kubernetes monitoring stack

1. Add the dependency repositories of [victoria-metrics-k8s-stack](#) chart.

```
$ helm repo add grafana https://grafana.github.io/helm-charts
$ helm repo add prometheus-community https://prometheus-community.github.io/helm-charts
```

2. Add the Victoria Metrics Kubernetes monitoring stack repository.

```
$ helm repo add vm https://victoriametrics.github.io/helm-charts/
```

3. Update the repositories.

```
$ helm repo update
```

4. Install the Victoria Metrics Kubernetes monitoring stack Helm chart. You need to specify the following configuration:

- the URL to access the PMM server in the `externalVM.write.url` option in the format `<PMM-SERVER-URL>/victoriametrics/api/v1/write`. The URL can contain either the IP address or the hostname of the PMM server.
- the unique name or an ID of the Kubernetes cluster in the `vmagent.spec.externalLabels.k8s_cluster_id` option. Ensure to set different values if you are sending metrics from multiple Kubernetes clusters to the same PMM Server.
- the `<namespace>` placeholder with your value. The Namespace must be the same as the Namespace for the Secret and ConfigMap

```
$ helm install vm-k8s vm/victoria-metrics-k8s-stack \
--set externalVM.write.url=<PMM-SERVER-URL>/victoriametrics/api/v1/write \
--set vmagent.spec.externalLabels.k8s_cluster_id=<UNIQUE-CLUSTER-IDENTIFIER/NAME> \
-n <namespace>
```

To illustrate, say your PMM Server URL is `https://pmm-example.com`, the cluster ID is `test-cluster` and the Namespace is `monitoring-system`. Then the command would look like this:

```
$ helm install vm-k8s vm/victoria-metrics-k8s-stack \
-f https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/values.yaml \
--set externalVM.write.url=https://pmm-example.com/victoriametrics/api/v1/write \
--set vmagent.spec.externalLabels.k8s_cluster_id=test-cluster \
-n monitoring-system
```

## Validate the successful installation

```
$ kubectl get pods -n <namespace>
```

### Sample output


|   |     |         |   |     |
|---|-----|---------|---|-----|
| vm-k8s-stack-kube-state-metrics-d9d85978d-9pzbs                 | 1/1 | Running | 0 | 28m |
| vm-k8s-stack-victoria-metrics-operator-844d558455-gvg4n         | 1/1 | Running | 0 | 28m |
| vmagent-vm-k8s-stack-victoria-metrics-k8s-stack-55fd8fc4fbcxwhx | 2/2 | Running | 0 | 28m |

What Pods are running depends on the configuration chosen in values used while installing `victoria-metrics-k8s-stack` chart.


## Verify metrics capture

1. Connect to the PMM server.
2. Click **Explore** and switch to the **Code** mode.
3. Check that the required metrics are captured, type the following in the Metrics browser dropdown:


- [cadvisor](#):

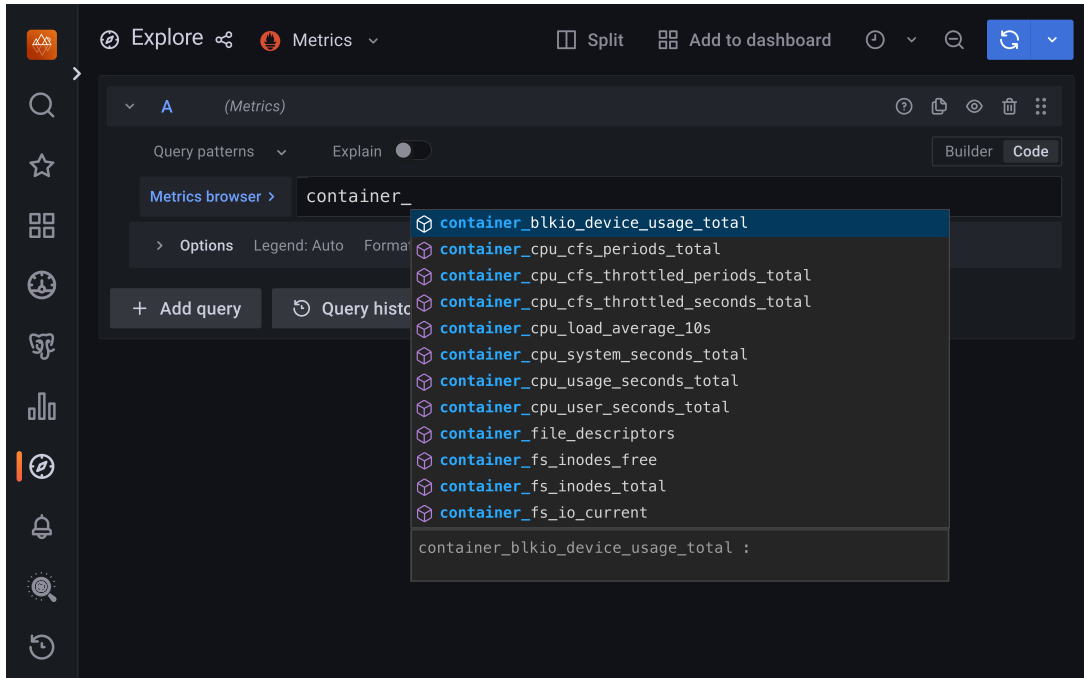

- kubelet:

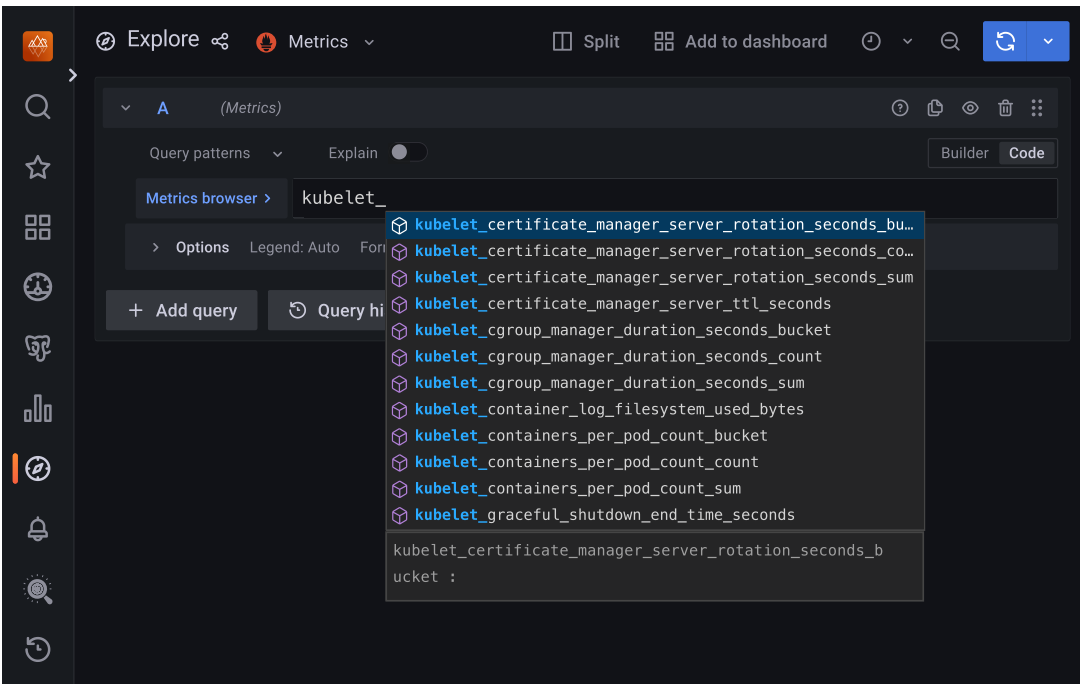

- [kube-state-metrics](#) metrics that also include Custom resource metrics for the Operator and database deployed in your Kubernetes cluster:

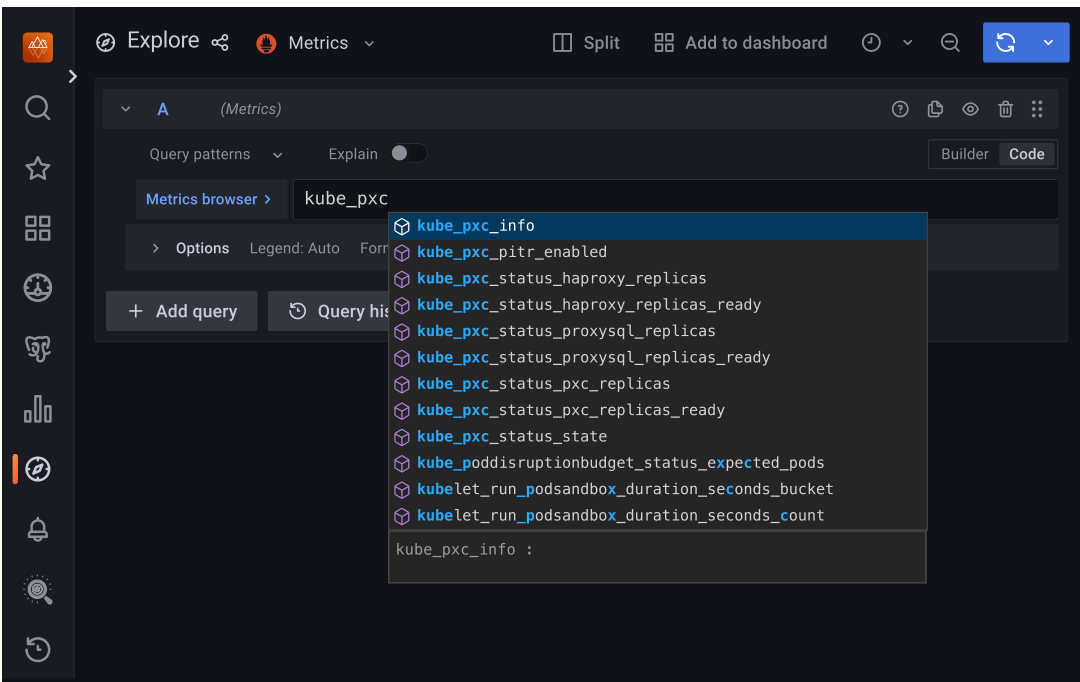

## Uninstall Victoria metrics Kubernetes stack

To remove Victoria metrics Kubernetes stack used for Kubernetes cluster monitoring, use the cleanup script. By default, the script removes all the [Custom Resource Definitions\(CRD\)](#) and Secrets associated with the Victoria metrics Kubernetes stack. To keep the CRDs, run the script with the `--keep-crd` flag.

## Remove CRDs

Replace the `<NAMESPACE>` placeholder with the namespace you specified during the Victoria metrics Kubernetes stack installation:

```
$ bash <(curl -fsL https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/cleanup.sh) --namespace <NAMESPACE>
```

## Keep CRDs

Replace the `<NAMESPACE>` placeholder with the namespace you specified during the Victoria metrics Kubernetes stack installation:

```
$ bash <(curl -fsL https://raw.githubusercontent.com/Percona-Lab/k8s-monitoring/refs/tags/v0.1.1/vm-operator-k8s-stack/cleanup.sh) --namespace <NAMESPACE> --keep-crd
```

Check that the Victoria metrics Kubernetes stack is deleted:

```
$ helm list -n <namespace>
```

The output should provide the empty list.

If you face any issues with the removal, uninstall the stack manually:

```
$ helm uninstall vm-k8s-stack -n < namespace>
```

# Delete Percona Operator for MySQL based on Percona XtraDB Cluster

You may have different reasons to clean up your Kubernetes environment: moving from trial deployment to a production one, testing experimental configurations and the like. In either case, you need to remove some (or all) of these objects:

- Percona XtraDB Cluster managed by the Operator
- Percona Operator for MySQL itself
- Custom Resource Definition deployed with the Operator
- Resources like PVCs and Secrets

## Delete the database cluster

To delete the database cluster means to delete the Custom Resource associated with it.

### Note

There are 3 [finalizers](#) defined in the Custom Resource, which define whether to delete or preserve TLS-related objects and data volumes when the cluster is deleted.

- `finalizers.percona.com/delete-ssl`: if present, objects, created for SSL (Secret, certificate, and issuer) are deleted along with the cluster deletion.
- `finalizers.percona.com/delete-pxc-pvc`: if present, [Persistent Volume Claims](#) for the database cluster Pods are deleted along with the cluster deletion.
- `finalizers.percona.com/delete-proxyysql-pvc`: if present, [Persistent Volume Claims](#) for ProxySQL Pods are deleted along with the cluster deletion.

All 3 finalizers are off by default in the `deploy/cr.yaml` configuration file, and this allows you to recreate the cluster without losing data, credentials for the system users, etc. You can always [delete TLS-related objects and PVCs manually](#), if needed.

The steps are the following:

- 1 List the Custom Resources. Replace the `<namespace>` placeholder with your value

```
$ kubectl get pxc -n <namespace>
```

- 2 Delete the Custom Resource with the name of your cluster

```
$ kubectl delete pxc <cluster_name> -n <namespace>
```

It may take a while to stop and delete the cluster.

### Sample output

```
perconaxtradbcluster.pxc.percona.com "cluster1" deleted
```

- 3 Check that the cluster is deleted by listing the Custom Resources again:

```
$ kubectl get pxc -n <namespace>
```

### Sample output

```
No resources found in <namespace> namespace.
```

## Delete the Operator

Choose the instructions relevant to the way you installed the Operator.

## kubectl

To uninstall the Operator, delete the [Deployments](#) related to it.

- 1 List the deployments. Replace the `<namespace>` placeholder with your namespace.

```
$ kubectl get deploy -n <namespace>
```

- 2 Delete the `percona-*` deployment

```
$ kubectl delete deploy percona-xtradb-cluster-operator -n <namespace>
```

### Sample output

```
deployment.apps "percona-xtradb-cluster-operator" deleted
```

- 3 Check that the Operator is deleted by listing the Pods. As a result you should have no Pods related to it.

```
$ kubectl get pods -n <namespace>
```

### Sample output

```
No resources found in <namespace> namespace.
```

- 4 If you are not just deleting the Operator and XtraDB Cluster from a specific namespace, but want to clean up your entire Kubernetes environment, you can also delete the [CustomResourceDefinitions \(CRDs\)](#).

**Warning:** CRDs in Kubernetes are non-namespaced but are available to the whole environment. This means that you shouldn't delete CRDs if you still have the Operator and database cluster in some namespace.

Get the list of CRDs.

```
$ kubectl get crd
```

- 5 Delete the `percona*.pxc.percona.com` CRDs

```
$ kubectl delete crd perconaxtradbclusterbackups.pxc.percona.com perconaxtradbclusterrestores.pxc.percona.com perconaxtradbclusters.pxc.percona.com
```

### Sample output

```
customresourcedefinition.apiextensions.k8s.io "perconaxtradbclusterbackups.pxc.percona.com" deleted
customresourcedefinition.apiextensions.k8s.io "perconaxtradbclusterrestores.pxc.percona.com" deleted
customresourcedefinition.apiextensions.k8s.io "perconaxtradbclusters.pxc.percona.com" deleted
```

## Helm

To delete the Operator, do the following:

- 1 List the Helm charts:

```
$ helm list -n <namespace>
```

#### Sample output

```
cluster1 <namespace> 1 2023-10-31 10:18:10.763049 +0100 CET deployed pxc-db-1.17.0 1.17.0
my-op <namespace> 1 2023-10-31 10:15:18.41444 +0100 CET deployed pxc-operator-1.17.0 1.17.0
```

- 2 Delete the [release object](#) for Percona XtraDB Cluster

```
$ helm uninstall cluster1 --namespace <namespace>
```

- 3 Delete the [release object](#) for the Operator

```
$ helm uninstall my-op --namespace <namespace>
```

## Clean up resources

By default, TLS-related objects and data volumes remain in Kubernetes environment after you delete the cluster to allow you to recreate it without losing the data. If you wish to delete them, do the following:

- 1 Delete Persistent Volume Claims.

- 1 List PVCs. Replace the <namespace> placeholder with your namespace:

```
$ kubectl get pvc -n <namespace>
```

#### Sample output

| NAME                   | STATUS | VOLUME                                   | CAPACITY | ACCESS MODES | STORAGECLASS | AGE   |
|------------------------|--------|--|----------|--------------|--------------|-------|
| datadir-cluster1-pxc-0 | Bound  | pvc-be4e2398-6fc9-456a-836b-9f0bc36d2a16 | 6Gi      | RWO          | standard-rwo | 3m57s |
| datadir-cluster1-pxc-1 | Bound  | pvc-8a9ed524-2f79-4ed1-9265-a09947084e08 | 6Gi      | RWO          | standard-rwo | 2m41s |
| datadir-cluster1-pxc-2 | Bound  | pvc-830fccfb-ced6-4fab-b85a-866aa435a2c7 | 6Gi      | RWO          | standard-rwo | 91s   |

- 2 Delete PVCs related to your cluster. The following command deletes PVCs for the `cluster1` cluster:

```
$ kubectl delete pvc datadir-cluster1-pxc-0 datadir-cluster1-pxc-1 datadir-cluster1-pxc-2 -n <namespace>
```

#### Sample output

```
persistentvolumeclaim "datadir-cluster1-pxc-0" deleted
persistentvolumeclaim "datadir-cluster1-pxc-1" deleted
persistentvolumeclaim "datadir-cluster1-pxc-2" deleted
```

- 2 Delete the Secrets

- 1 List Secrets:

```
$ kubectl get secrets -n <namespace>
```

- 2 Delete the Secret:

```
$ kubectl delete secret <secret_name> -n <namespace>
```



## Reference

# Custom Resource options reference

Percona Operator for MySQL uses [Custom Resources](#) to manage options for the various components of the cluster.

- `PerconaXtraDBCluster` Custom Resource with Percona XtraDB Cluster options,
- `PerconaXtraDBClusterBackup` and `PerconaXtraDBClusterRestore` Custom Resources contain options for Percona XtraBackup used to backup Percona XtraDB Cluster and to restore it from backups.

## PerconaXtraDBCluster Custom Resource options

`PerconaXtraDBCluster` Custom Resource contains options for Percona XtraDB Cluster and can be configured via the [deploy/cr.yaml](#) configuration file.

The metadata part contains the following keys:

- `name` (`cluster1` by default) sets the name of your Percona XtraDB Cluster; it should include only [URL-compatible characters](#), not exceed 22 characters, start with an alphabetic character, and end with an alphanumeric character;
- `finalizers` subsection:
  - `percona.com/delete-pods-in-order` if present, activates the [Finalizer](#) which controls the proper Pods deletion order in case of the cluster deletion event (on by default).
  - `percona.com/delete-pxc-pvc` if present, activates the [Finalizer](#) which deletes [Persistent Volume Claims](#) for Percona XtraDB Cluster Pods after the cluster deletion event (off by default).
  - `percona.com/delete-proxysql-pvc` if present, activates the [Finalizer](#) which deletes [Persistent Volume Claim](#) for ProxySQL Pod after the cluster deletion event (off by default).
  - `percona.com/delete-ssl` if present, activates the [Finalizer](#) which deletes [objects, created for SSL](#) (Secret, certificate, and issuer) after the cluster deletion event (off by default).

The toplevel spec elemets of the [deploy/cr.yaml](#) are the following ones:

### `allowUnsafeConfigurations`

Prevents users from configuring a cluster with unsafe parameters such as starting the cluster with the number of Percona XtraDB Cluster instances which is less than 3, more than 5, or is an even number, with less than 2 ProxySQL or HAProxy Pods, or without TLS/SSL certificates. **This option is deprecated and will be removed in future releases.** Use `unsafeFlags` subsection instead.

| Value type           | Example            |
|----------------------|--------------------|
| <code>boolean</code> | <code>false</code> |

### `enableCRValidationWebhook`

Enables or disables schema validation before applying `cr.yaml` file (works only in [cluster-wide mode](#) due to [access restrictions](#)).

| Value type           | Example           |
|----------------------|-------------------|
| <code>boolean</code> | <code>true</code> |

### `enableVolumeExpansion`

Enables or disables [automatic storage scaling / volume expansion](#).

| Value type           | Example            |
|----------------------|--------------------|
| <code>boolean</code> | <code>false</code> |

## pause

Pause/resume: setting it to `true` gracefully stops the cluster, and setting it to `false` after shut down starts the cluster back.

| Value type           | Example            |
|----------------------|--------------------|
| <code>boolean</code> | <code>false</code> |

## secretsName

A name for [users secrets](#).

| Value type          | Example                       |
|---------------------|-------------------------------|
| <code>string</code> | <code>cluster1-secrets</code> |

## crVersion

Version of the Operator the Custom Resource belongs to.

| Value type          | Example             |
|---------------------|---------------------|
| <code>string</code> | <code>1.17.0</code> |

## ignoreAnnotations

The list of annotations [to be ignored](#) by the Operator.

| Value type          | Example                             |
|---------------------|-------------------------------------|
| <code>subdoc</code> | <code>iam.amazonaws.com/role</code> |

## ignoreLabels

The list of labels [to be ignored](#) by the Operator.

| Value type          | Example           |
|---------------------|-------------------|
| <code>subdoc</code> | <code>rack</code> |

## vaultSecretName

A secret for the [HashiCorp Vault](#) to carry on [Data at Rest Encryption](#).

| Value type          | Example                           |
|---------------------|-----------------------------------|
| <code>string</code> | <code>keyring-secret-vault</code> |

## sslSecretName

A secret with TLS certificate generated for *external* communications, see [Transport Layer Security \(TLS\)](#) for details.

| Value type      | Example      |
|-----------------|--------------|
| <b>S</b> string | cluster1-ssl |

### sslInternalSecretName

A secret with TLS certificate generated for *internal* communications, see [Transport Layer Security \(TLS\)](#) for details.

| Value type      | Example               |
|-----------------|-----------------------|
| <b>S</b> string | cluster1-ssl-internal |

### logCollectorSecretName

A secret for the [Fluent Bit Log Collector](#).

| Value type      | Example                  |
|-----------------|--------------------------|
| <b>S</b> string | my-log-collector-secrets |

### initImage

An alternative image for the initial Operator installation. **This option is deprecated and will be removed in future releases.** Use `initContainer.image` instead.

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | percona/percona-xtradb-cluster-operator:1.17.0 |

### updateStrategy

A strategy the Operator uses for [upgrades](#).

| Value type      | Example     |
|-----------------|-------------|
| <b>S</b> string | SmartUpdate |

## Unsafe flags section

The `unsafeFlags` section in the [deploy/cr.yaml](#) file contains various configuration options to prevent users from configuring a cluster with unsafe parameters.


### unsafeFlags.tls

Allows users to configure a cluster without TLS/SSL certificates (if `false`, the Operator will detect unsafe parameters, set cluster status to `error`, and print error message in logs).

| Value type       | Example |
|------------------|---------|
| <b>B</b> boolean | false   |


### unsafeFlags.pxcSize

Allows users to configure a cluster with less than 3 Percona XtraDB Cluster instances (if `false`, the Operator will detect unsafe parameters, set cluster status to `error`, and print error message in logs).

| Value type  | Example            |
|---|--------------------|
|  boolean | <code>false</code> |


### `unsafeFlags.proxySize`

Allows users to configure a cluster with less than 2 ProxySQL or HAProxy Pods (if `false`, the Operator will detect unsafe parameters, set cluster status to `error`, and print error message in logs).

| Value type  | Example            |
|---|--------------------|
|  boolean | <code>false</code> |

### `unsafeFlags.backupIfUnhealthy`

Allows running a backup even if the cluster status is not `ready`.


| Value type  | Example            |
|---|--------------------|
|  boolean | <code>false</code> |

## initContainer configuration section

The `initContainer` section in the [deploy/cr.yaml](#) file allows providing an alternative image with various options for the initial Operator installation.


### `initContainer.image`

An alternative image for the initial Operator installation.

| Value type   | Example   |
|--|---|
|  string | <code>percona/percona-xtradb-cluster-operator:1.17.0</code> |


### `initContainer.containerSecurityContext`

A custom [Kubernetes Security Context for a Container](#) for the image used for the initial Operator installation.

| Value type   | Example   |
|--|---|
|  subdoc | <pre>privileged: false runAsUser: 1001 runAsGroup: 1001</pre> |

### `initContainer.resources.requests.memory`

The [Kubernetes memory requests](#) for an image used while the initial Operator installation.

| Value type   | Example         |
|--|-----------------|
|  string | <code>1G</code> |

### `initContainer.resources.requests.cpu`

[Kubernetes CPU requests](#) for an image used while the initial Operator installation.

| Value type          | Example           |
|---------------------|-------------------|
| <code>string</code> | <code>600m</code> |

### `initContainer.resources.limits.memory`

[Kubernetes memory limits](#) for an image used while the initial Operator installation.

| Value type          | Example         |
|---------------------|-----------------|
| <code>string</code> | <code>1G</code> |

### `initContainer.resources.limits.cpu`

[Kubernetes CPU limits](#) for an image used while the initial Operator installation.

| Value type          | Example        |
|---------------------|----------------|
| <code>string</code> | <code>1</code> |

## TLS (extended cert-manager configuration section)

The `tls` section in the [deploy/cr.yaml](#) file contains various configuration options for additional customization of the [TLS cert-manager](#).

### `tls.enabled`

Enables or disables the [TLS encryption](#). If set to `false`, it also requires setting `unsafeFlags.tls` option to `true`.

| Value type           | Example           |
|----------------------|-------------------|
| <code>boolean</code> | <code>true</code> |

### `tls.SANs`

Additional domains (SAN) to be added to the TLS certificate within the extended cert-manager configuration.

| Value type          | Example |
|---------------------|---------|
| <code>subdoc</code> |         |

### `tls.issuerConf.name`

A [cert-manager issuer name](#).

| Value type          | Example                                |
|---------------------|--|
| <code>string</code> | <code>special-selfsigned-issuer</code> |

### `tls.issuerConf.kind`

A [cert-manager issuer type](#).

| Value type          | Example                    |
|---------------------|----------------------------|
| <code>string</code> | <code>ClusterIssuer</code> |

### `tls.issuerConf.group`

A [cert-manager issuer group](#). Should be `cert-manager.io` for built-in cert-manager certificate issuers.

| Value type          | Example                      |
|---------------------|------------------------------|
| <code>string</code> | <code>cert-manager.io</code> |

## Upgrade options section

The `upgradeOptions` section in the [deploy/cr.yaml](#) file contains various configuration options to control Percona XtraDB Cluster upgrades.

### `upgradeOptions.versionServiceEndpoint`

The Version Service URL used to check versions compatibility for upgrade.

| Value type          | Example                                |
|---------------------|--|
| <code>string</code> | <code>https://check.percona.com</code> |

### `upgradeOptions.apply`

Specifies how [updates are processed](#) by the Operator. `Never` or `Disabled` will completely disable automatic upgrades, otherwise it can be set to `Latest` or `Recommended` or to a specific version string of Percona XtraDB Cluster (e.g. `8.0.19-10.1`) that is wished to be version-locked (so that the user can control the version running, but use automatic upgrades to move between them).

| Value type          | Example               |
|---------------------|-----------------------|
| <code>string</code> | <code>Disabled</code> |

### `upgradeOptions.schedule`

Scheduled time to check for updates, specified in the [crontab format](#).

| Value type          | Example                   |
|---------------------|---------------------------|
| <code>string</code> | <code>0 2 \* \* \*</code> |

## PXC section

The `pxc` section in the [deploy/cr.yaml](#) file contains general configuration options for the Percona XtraDB Cluster.

### `pxc.size`

The size of the Percona XtraDB cluster must be 3 or 5 for [High Availability](#). Other values are allowed if the `spec.unsafeFlags.pxcSize` key is set to true.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 3       |

### pxc.image

The Docker image of the Percona cluster used (actual image names for Percona XtraDB Cluster 8.0 and Percona XtraDB Cluster 5.7 can be found [in the list of certified images](#)).

| Value type      | Example                                    |
|-----------------|--|
| <b>s</b> string | percona/percona-xtradb-cluster:8.0.41-32.1 |

### pxc.autoRecovery

Turns [Automatic Crash Recovery](#) on or off.

| Value type       | Example |
|------------------|---------|
| <b>b</b> boolean | true    |

### pxc.expose.enabled

Enable or disable exposing Percona XtraDB Cluster instances with dedicated IP addresses.

| Value type       | Example |
|------------------|---------|
| <b>b</b> boolean | true    |

### pxc.expose.type

The [Kubernetes Service Type](#) used for exposure.

| Value type      | Example      |
|-----------------|--------------|
| <b>s</b> string | LoadBalancer |

### pxc.expose.trafficPolicy

Specifies whether Service should [route external traffic to cluster-wide or node-local endpoints](#) (it can influence the load balancing effectiveness) **This option is deprecated and will be removed in future releases.** Use `pxc.expose.externalTrafficPolicy` instead.

| Value type      | Example |
|-----------------|---------|
| <b>s</b> string | Local   |

### pxc.expose.externalTrafficPolicy

Specifies whether Service for Percona XtraDB Cluster should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).



| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Local   |

### **pxc.expose.internalTrafficPolicy**

Specifies whether Service for Percona XtraDB Cluster should [route internal traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Local   |

### **pxc.expose.loadBalancerSourceRanges**

The range of client IP addresses from which the load balancer should be reachable (if not set, there is no limitations).

| Value type      | Example    |
|-----------------|------------|
| <b>S</b> string | 10.0.0.0/8 |

### **pxc.expose.loadBalancerIP**

The static IP-address for the load balancer.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | 127.0.0.1 |

### **pxc.expose.annotations**

The [Kubernetes annotations](#).

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | networking.gke.io/load-balancer-type: "Internal" |

### **pxc.replicationChannels.name**

Name of the replication channel for [cross-site replication](#).

| Value type      | Example      |
|-----------------|--------------|
| <b>S</b> string | pxc1_to_pxc2 |

### **pxc.replicationChannels.isSource**

Should the cluster act as Source ( `true` ) or Replica ( `false` ) in [cross-site replication](#).

| Value type        | Example |
|-------------------|---------|
| <b>CB</b> boolean | false   |

### `pxc.replicationChannels.configuration.sourceRetryCount`

Number of retries Replica should do when the existing connection source fails.

| Value type       | Example        |
|------------------|----------------|
| <code>int</code> | <code>3</code> |

### `pxc.replicationChannels.configuration.sourceConnectRetry`

The interval between reconnection attempts in seconds to be used by Replica when the the existing connection source fails.

| Value type       | Example         |
|------------------|-----------------|
| <code>int</code> | <code>60</code> |

### `pxc.replicationChannels.configuration.ssl`

Turns SSL for [replication channels](#) on or off.

| Value type           | Example            |
|----------------------|--------------------|
| <code>boolean</code> | <code>false</code> |

### `pxc.replicationChannels.configuration.sslSkipVerify`

Turns the host name identity verification for SSL-based [replication](#) on or off.

| Value type           | Example           |
|----------------------|-------------------|
| <code>boolean</code> | <code>true</code> |

### `pxc.replicationChannels.configuration.ca`

The path name of the Certificate Authority (CA) certificate file to be used if the SSL for [replication channels](#) is turned on.

| Value type          | Example                            |
|---------------------|------------------------------------|
| <code>string</code> | <code>/etc/mysql/ssl/ca.crt</code> |

### `pxc.replicationChannels.sourcesList.host`

For the [cross-site replication](#) Replica cluster, this key should contain the hostname or IP address of the Source cluster.

| Value type          | Example                    |
|---------------------|----------------------------|
| <code>string</code> | <code>10.95.251.101</code> |

### `pxc.replicationChannels.sourcesList.port`

For the [cross-site replication](#) Replica cluster, this key should contain the Source port number.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 3306    |

### **pxc.replicationChannels.sourcesList.weight**

For the [cross-site replication](#) Replica cluster, this key should contain the Source cluster weight (varies from 1 to 100, the cluster with the higher number will be selected as the replication source first).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 100     |

### **pxc.readinessDelaySec**

Adds a delay before a run check to verify the application is ready to process traffic.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 15      |

### **pxc.livenessDelaySec**

Adds a delay before the run check ensures the application is healthy and capable of processing requests.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 300     |

### **pxc.configuration**

The `my.cnf` file options to be passed to Percona XtraDB cluster nodes.

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | <br>[mysqld]<br>wsrep_debug=0N<br>wsrep-provider_options=gcache.size=1G;gcache.recover=yes |

### **pxc.imagePullSecrets.name**

The [Kubernetes ImagePullSecret](#) [↗](#).

| Value type      | Example                      |
|-----------------|------------------------------|
| <b>S</b> string | private-registry-credentials |

### **pxc.priorityClassName**

The [Kubernetes Pod priority class](#) [↗](#).

| Value type      | Example       |
|-----------------|---------------|
| <b>S</b> string | high-priority |

### **pxc.schedulerName**

The [Kubernetes Scheduler](#).

| Value type      | Example            |
|-----------------|--------------------|
| <b>S</b> string | mycustom-scheduler |

### **pxc.annotations**

The [Kubernetes annotations](#).

| Value type     | Example                          |
|----------------|----------------------------------|
| <b>D</b> label | iam.amazonaws.com/role: role-arn |

### **pxc.labels**

[Labels are key-value pairs attached to objects](#).

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

### **pxc.readinessProbes.initialDelaySeconds**

Number of seconds to wait before performing the first [readiness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 15      |

### **pxc.readinessProbes.timeoutSeconds**

Number of seconds after which the [readiness probe](#) times out.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 15      |

### **pxc.readinessProbes.periodSeconds**

How often (in seconds) to perform the [readiness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 30      |

### `pxc.readinessProbes.successThreshold`

Minimum consecutive successes for the [readiness probe](#) to be considered successful after having failed.

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 1       |

### `pxc.readinessProbes.failureThreshold`

When the [readiness probe](#) fails, Kubernetes will try this number of times before marking the Pod Unready.

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 5       |

### `pxc.livenessProbes.initialDelaySeconds`

Number of seconds to wait before performing the first [liveness probe](#).

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 300     |

### `pxc.livenessProbes.timeoutSeconds`

Number of seconds after which the [liveness probe](#) times out.

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 5       |

### `pxc.livenessProbes.periodSeconds`

How often (in seconds) to perform the [liveness probe](#).

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 10      |

### `pxc.livenessProbes.successThreshold`

Minimum consecutive successes for the [liveness probe](#) to be considered successful after having failed.

| Value type       | Example |
|------------------|---------|
| <code>int</code> | 1       |

### `pxc.livenessProbes.failureThreshold`

When the [liveness probe](#) fails, Kubernetes will try this number of times before restarting the container.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 3       |

### `pxc.envVarsSecret`

A secret with environment variables, see [Define environment variables](#) for details.

| Value type      | Example            |
|-----------------|--------------------|
| <b>S</b> string | my-env-var-secrets |

### `pxc.resources.requests.memory`

The [Kubernetes memory requests](#) for a Percona XtraDB Cluster container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### `pxc.resources.requests.cpu`

[Kubernetes CPU requests](#) for a Percona XtraDB Cluster container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 600m    |

### `pxc.resources.requests.ephemeral-storage`

Kubernetes [Ephemeral Storage requests](#) for a Percona XtraDB Cluster container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### `pxc.resources.limits.memory`

[Kubernetes memory limits](#) for a Percona XtraDB Cluster container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### `pxc.resources.limits.cpu`

[Kubernetes CPU limits](#) for a Percona XtraDB Cluster container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1       |

### `pxc.resources.limits.ephemeral-storage`

Kubernetes [Ephemeral Storage](#) [limits](#) for a Percona XtraDB Cluster container.

| Value type            | Example |
|-----------------------|---------|
| <code>S</code> string | 1G      |

### `pxc.nodeSelector`

Kubernetes [nodeSelector](#).

| Value type           | Example       |
|----------------------|---------------|
| <code>D</code> label | disktype: ssd |

### `pxc.topologySpreadConstraints.labelSelector.matchLabels`

The Label selector for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type           | Example   |
|----------------------|---|
| <code>D</code> label | app.kubernetes.io/name: percona-xtradb-cluster-operator |

### `pxc.topologySpreadConstraints.maxSkew`

The degree to which Pods may be unevenly distributed under the [Kubernetes Pod Topology Spread Constraints](#).

| Value type         | Example |
|--------------------|---------|
| <code>I</code> int | 1       |

### `pxc.topologySpreadConstraints.topologyKey`

The key of node labels for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type            | Example                |
|-----------------------|------------------------|
| <code>S</code> string | kubernetes.io/hostname |

### `pxc.topologySpreadConstraints.whenUnsatisfiable`

What to do with a Pod if it doesn't satisfy the [Kubernetes Pod Topology Spread Constraints](#).

| Value type            | Example       |
|-----------------------|---------------|
| <code>S</code> string | DoNotSchedule |

### `pxc.affinity.topologyKey`

The Operator [topology key](#) node anti-affinity constraint.

| Value type      | Example                |
|-----------------|------------------------|
| <b>S</b> string | kubernetes.io/hostname |

### pxc.affinity.advanced

In cases where the Pods require complex tuning the advanced option turns off the `topologyKey` effect. This setting allows the standard Kubernetes affinity constraints of any complexity to be used.

| Value type      | Example |
|-----------------|---------|
| <b>≡</b> subdoc |         |

### pxc.tolerations

[Kubernetes Pod tolerations](#) [↗](#).

| Value type      | Example                              |
|-----------------|--------------------------------------|
| <b>≡</b> subdoc | node.alpha.kubernetes.io/unreachable |

### pxc.podDisruptionBudget.maxUnavailable

The [Kubernetes podDisruptionBudget](#) [↗](#) specifies the number of Pods from the set unavailable after the eviction.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 1       |

### pxc.podDisruptionBudget.minAvailable

The [Kubernetes podDisruptionBudget](#) [↗](#) Pods that must be available after an eviction.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 0       |

### pxc.volumeSpec.emptyDir

The [Kubernetes emptyDir volume](#) [↗](#) The directory created on a node and accessible to the Percona XtraDB Cluster Pod containers.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | {}      |

### pxc.volumeSpec.hostPath.path

[Kubernetes hostPath](#) [↗](#) The volume that mounts a directory from the host node's filesystem into your Pod. The path property is required.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | /data   |



### pxc.volumeSpec.hostPath.type

The [Kubernetes hostPath](#). An optional property for the hostPath.

| Value type          | Example   |
|---------------------|-----------|
| <code>string</code> | Directory |

### pxc.volumeSpec.persistentVolumeClaim.storageClassName

Set the [Kubernetes storage class](#) to use with the Percona XtraDB Cluster [PersistentVolumeClaim](#).

| Value type          | Example  |
|---------------------|----------|
| <code>string</code> | standard |

### pxc.volumeSpec.persistentVolumeClaim.accessModes

The [Kubernetes PersistentVolumeClaim](#) access modes for the Percona XtraDB cluster.

| Value type         | Example         |
|--------------------|-----------------|
| <code>array</code> | [ReadWriteOnce] |

### pxc.volumeSpec.persistentVolumeClaim.dataSource.name

The name of PVC used as a data source to [create the Percona XtraDB Cluster Volumes by cloning](#).

| Value type          | Example           |
|---------------------|-------------------|
| <code>string</code> | new-snapshot-test |

### pxc.volumeSpec.persistentVolumeClaim.dataSource.kind

The [Kubernetes DataSource type](#).

| Value type          | Example        |
|---------------------|----------------|
| <code>string</code> | VolumeSnapshot |

### pxc.volumeSpec.persistentVolumeClaim.dataSource.apiGroup

The [Kubernetes API group](#) to use for [PVC Data Source](#).

| Value type          | Example                 |
|---------------------|-------------------------|
| <code>string</code> | snapshot.storage.k8s.io |

### pxc.gracePeriod

The [Kubernetes grace period when terminating a Pod](#).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 600     |

### pxc.containerSecurityContext

A custom [Kubernetes Security Context for a Container](#) to be used instead of the default one.

| Value type | Example                       |
|------------|-------------------------------|
| ≡ subdoc   | <code>privileged: true</code> |

### pxc.podSecurityContext

A custom [Kubernetes Security Context for a Pod](#) to be used instead of the default one.

| Value type | Example   |
|------------|---|
| ≡ subdoc   | <code>fsGroup: 1001</code><br><code>supplementalGroups: [1001, 1002, 1003]</code> |

### pxc.serviceAccountName

The [Kubernetes Service Account](#) for Percona XtraDB Cluster Pods.

| Value type      | Example   |
|-----------------|---|
| <b>S</b> string | <code>percona-xtradb-cluster-operator-workload</code> |

### pxc.imagePullPolicy

The [policy used to update images](#).

| Value type      | Example             |
|-----------------|---------------------|
| <b>S</b> string | <code>Always</code> |

### pxc.runtimeClassName

Name of the [Kubernetes Runtime Class](#) for Percona XtraDB Cluster Pods.

| Value type      | Example               |
|-----------------|-----------------------|
| <b>S</b> string | <code>image-rc</code> |


### pxc.sidecars.image

Image for the [custom sidecar container](#) for Percona XtraDB Cluster Pods.

| Value type      | Example              |
|-----------------|----------------------|
| <b>S</b> string | <code>busybox</code> |


### **pxc.sidecars.command**

Command for the [custom sidecar container](#) for Percona XtraDB Cluster Pods.

| Value type  | Example                  |
|---|--------------------------|
|  array | <code>["/bin/sh"]</code> |

### **pxc.sidecars.args**

Command arguments for the [custom sidecar container](#) for Percona XtraDB Cluster Pods.

| Value type  | Example   |
|---|---|
|  array | <code>["-c", "while true; do trap 'exit 0' SIGINT SIGTERM SIGQUIT SIGKILL; done;"]</code> |


### **pxc.sidecars.name**

Name of the [custom sidecar container](#) for Percona XtraDB Cluster Pods.

| Value type   | Example                   |
|--|---------------------------|
|  string | <code>my-sidecar-1</code> |


### **pxc.sidecars.resources.requests.memory**

The [Kubernetes memory requests](#)  for a Percona XtraDB Cluster sidecar container.

| Value type   | Example         |
|--|-----------------|
|  string | <code>1G</code> |


### **pxc.sidecars.resources.requests.cpu**

[Kubernetes CPU requests](#)  for a Percona XtraDB Cluster sidecar container.

| Value type   | Example           |
|--|-------------------|
|  string | <code>500m</code> |

### **pxc.sidecars.resources.limits.memory**

[Kubernetes memory limits](#)  for a Percona XtraDB Cluster sidecar container.

| Value type   | Example         |
|--|-----------------|
|  string | <code>2G</code> |

### **pxc.sidecars.resources.limits.cpu**

[Kubernetes CPU limits](#)  for a Percona XtraDB Cluster sidecar container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 600m    |

### **pxc.lifecycle.preStop.exec.command**

Command for the [preStop lifecycle hook](#) for Percona XtraDB Cluster Pods.

| Value type     | Example         |
|----------------|-----------------|
| <b>A</b> array | [ "/bin/true" ] |

### **pxc.lifecycle.postStart.exec.command**

Command for the [postStart lifecycle hook](#) for Percona XtraDB Cluster Pods.

| Value type     | Example         |
|----------------|-----------------|
| <b>A</b> array | [ "/bin/true" ] |

## HAProxy section

The `haproxy` section in the [deploy/cr.yaml](#) file contains configuration options for the HAProxy service.

### **haproxy.enabled**

Enables or disables [load balancing with HAProxy Services](#).

| Value type       | Example |
|------------------|---------|
| <b>B</b> boolean | true    |

### **haproxy.size**

The number of the HAProxy Pods [to provide load balancing](#). It should be 2 or more unless the `spec.unsafeFlags.proxySize` key is set to true.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 2       |

### **haproxy.image**

HAProxy Docker image to use.

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | percona/percona-xtradb-cluster-operator:1.17.0-haproxy |

### **haproxy.imagePullPolicy**

The [policy used to update images](#).

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Always  |

### haproxy.imagePullSecrets.name

The [Kubernetes imagePullSecrets](#) for the HAProxy image.

| Value type      | Example                      |
|-----------------|------------------------------|
| <b>S</b> string | private-registry-credentials |

### haproxy.readinessDelaySec

Adds a delay before a run check to verify the application is ready to process traffic.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 15      |

### haproxy.livenessDelaySec

Adds a delay before the run check ensures the application is healthy and capable of processing requests.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 300     |

### haproxy.configuration

The [custom HAProxy configuration file](#) contents.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string |         |

### haproxy.annotations

The [Kubernetes annotations](#) metadata.

| Value type     | Example                          |
|----------------|----------------------------------|
| <b>D</b> label | iam.amazonaws.com/role: role-arn |

### haproxy.labels

[Labels are key-value pairs attached to objects](#).

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

### haproxy.readinessProbes.initialDelaySeconds

Number of seconds to wait before performing the first [readiness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 15      |

### haproxy.readinessProbes.timeoutSeconds

Number of seconds after which the [readiness probe](#) times out.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 1       |

### haproxy.readinessProbes.periodSeconds

How often (in seconds) to perform the [readiness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 5       |

### haproxy.readinessProbes.successThreshold

Minimum consecutive successes for the [readiness probe](#) to be considered successful after having failed.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 1       |

### haproxy.readinessProbes.failureThreshold

When the [readiness probe](#) fails, Kubernetes will try this number of times before marking the Pod Unready.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 3       |

### haproxy.serviceType

Specifies the type of [Kubernetes Service](#) to be used for HAProxy. **This option is deprecated and will be removed in future releases.** Use `haproxy.exposePrimary.type` instead.

| Value type      | Example   |
|-----------------|-----------|
| <b>s</b> string | ClusterIP |

### haproxy.externalTrafficPolicy

Specifies whether Service for HAProxy should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness). **This option is deprecated and will be removed in future releases.** Use `haproxy.exposePrimary.externalTrafficPolicy` instead.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Cluster |

### haproxy.livenessProbes.initialDelaySeconds

Number of seconds to wait before performing the first [liveness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 60      |

### haproxy.livenessProbes.timeoutSeconds

Number of seconds after which the [liveness probe](#) times out.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 5       |

### haproxy.livenessProbes.periodSeconds

How often (in seconds) to perform the [liveness probe](#).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 30      |

### haproxy.livenessProbes.successThreshold

Minimum consecutive successes for the [liveness probe](#) to be considered successful after having failed.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 1       |

### haproxy.readinessProbes.failureThreshold

When the [liveness probe](#) fails, Kubernetes will try this number of times before marking the Pod Unready.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 4       |

### haproxy.resources.requests.memory

The [Kubernetes memory requests](#) for the main HAProxy container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### haproxy.resources.requests.cpu

[Kubernetes CPU requests](#) for the main HAProxy container.

| Value type          | Example           |
|---------------------|-------------------|
| <code>string</code> | <code>600m</code> |

### haproxy.resources.limits.memory

[Kubernetes memory limits](#) for the main HAProxy container.

| Value type          | Example         |
|---------------------|-----------------|
| <code>string</code> | <code>1G</code> |

### haproxy.resources.limits.cpu

[Kubernetes CPU limits](#) for the main HAProxy container.

| Value type          | Example           |
|---------------------|-------------------|
| <code>string</code> | <code>700m</code> |

### haproxy.envVarsSecret

A secret with environment variables, see [Define environment variables](#) for details.

| Value type          | Example                         |
|---------------------|---------------------------------|
| <code>string</code> | <code>my-env-var-secrets</code> |

### haproxy.priorityClassName

The [Kubernetes Pod Priority class](#) for HAProxy.

| Value type          | Example                    |
|---------------------|----------------------------|
| <code>string</code> | <code>high-priority</code> |

### haproxy.schedulerName

The [Kubernetes Scheduler](#).

| Value type          | Example                         |
|---------------------|---------------------------------|
| <code>string</code> | <code>mycustom-scheduler</code> |

### haproxy.nodeSelector

[Kubernetes nodeSelector](#).



| Value type | Example                    |
|------------|----------------------------|
| □ label    | disktype: <code>ssd</code> |

### haproxy.topologySpreadConstraints.labelSelector.matchLabels

The Label selector for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example  |
|------------|--|
| □ label    | app.kubernetes.io/name: <code>percona-xtradb-cluster-operator</code> |

### haproxy.topologySpreadConstraints.maxSkew

The degree to which Pods may be unevenly distributed under the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example |
|------------|---------|
| ■ int      | 1       |

### haproxy.topologySpreadConstraints.topologyKey

The key of node labels for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example                |
|------------|------------------------|
| ■ string   | kubernetes.io/hostname |

### haproxy.topologySpreadConstraints.whenUnsatisfiable

What to do with a Pod if it doesn't satisfy the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example                    |
|------------|----------------------------|
| ■ string   | <code>DoNotSchedule</code> |

### haproxy.affinity.topologyKey

The Operator [topology\\_key](#) node anti-affinity constraint.

| Value type | Example                |
|------------|------------------------|
| ■ string   | kubernetes.io/hostname |

### haproxy.affinity.advanced

If available it makes a [topologyKey](#) node affinity constraint to be ignored.

| Value type | Example |
|------------|---------|
| ≡ subdoc   |         |


## haproxy.tolerations

[Kubernetes Pod tolerations](#) .

| Value type   | Example                              |
|--|--------------------------------------|
|  subdoc | node.alpha.kubernetes.io/unreachable |


## haproxy.podDisruptionBudget.maxUnavailable

The [Kubernetes podDisruptionBudget](#)  specifies the number of Pods from the set unavailable after the eviction.

| Value type  | Example |
|---|---------|
|  int | 1       |

## haproxy.podDisruptionBudget.minAvailable

The [Kubernetes podDisruptionBudget](#)  Pods that must be available after an eviction.

| Value type  | Example |
|---|---------|
|  int | 0       |


## haproxy.gracePeriod

The [Kubernetes grace period when terminating a Pod](#) .


| Value type  | Example |
|---|---------|
|  int | 30      |


## haproxy.exposePrimary.enabled

Enables or disables the HAProxy primary instance Service. This field is deprecated starting with the Operator version 1.17.0.

| Value type  | Example |
|---|---------|
|  boolean | false   |

## haproxy.exposePrimary.type

Specifies the type of [Kubernetes Service](#)  to be used for HAProxy primary instance Service.

| Value type   | Example   |
|--|-----------|
|  string | ClusterIP |

## haproxy.exposePrimary.externalTrafficPolicy

Specifies whether Service for HAProxy should [route external traffic to cluster-wide or to node-local endpoints](#)  (it can influence the load balancing effectiveness).

| Value type            | Example |
|-----------------------|---------|
| <code>S</code> string | Cluster |

### haproxy.exposePrimary.internalTrafficPolicy

Specifies whether Service for HAProxy primary instance should [route internal traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type            | Example |
|-----------------------|---------|
| <code>S</code> string | Cluster |

### haproxy.exposePrimary.loadBalancerSourceRanges

The range of client IP addresses from which the load balancer should be reachable (if not set, there is no limitations).

| Value type            | Example    |
|-----------------------|------------|
| <code>S</code> string | 10.0.0.0/8 |

### haproxy.exposePrimary.loadBalancerIP

The static IP-address for the load balancer.

| Value type            | Example   |
|-----------------------|-----------|
| <code>S</code> string | 127.0.0.1 |

### haproxy.serviceLabels

The [Kubernetes labels](#) for the load balancer Service. **This option is deprecated and will be removed in future releases.** Use `haproxy.exposePrimary.labels` instead.

| Value type           | Example       |
|----------------------|---------------|
| <code>D</code> label | rack: rack-22 |

### haproxy.exposePrimary.labels

The [Kubernetes labels](#) for the load balancer Service.

| Value type           | Example       |
|----------------------|---------------|
| <code>D</code> label | rack: rack-22 |

### haproxy.serviceAnnotations

The [Kubernetes annotations](#) metadata for the load balancer Service. **This option is deprecated and will be removed in future releases.** Use `haproxy.exposePrimary.annotations` instead.

| Value type      | Example   |
|-----------------|---|
| <b>S</b> string | <code>service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp</code> |

### haproxy.exposePrimary.annotations

The [Kubernetes annotations](#)  metadata for the load balancer Service.

| Value type      | Example   |
|-----------------|---|
| <b>S</b> string | <code>service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp</code> |

### haproxy.replicasServiceEnabled

Enables or disables `haproxy-replicas` Service. This Service (on by default) forwards requests to all Percona XtraDB Cluster instances, and it *should not be used for write requests!* **This option is deprecated and will be removed in future releases.** Use `haproxy.exposeReplicas.enabled` instead.

| Value type       | Example            |
|------------------|--------------------|
| <b>☐</b> boolean | <code>false</code> |

### haproxy.exposeReplicas.enabled

Enables or disables `haproxy-replicas` Service. This Service default forwards requests to all Percona XtraDB Cluster instances, and it **should not be used for write requests!**

| Value type       | Example           |
|------------------|-------------------|
| <b>☐</b> boolean | <code>true</code> |

### haproxy.exposeReplicas.onlyReaders

Setting it to `true` excludes current MySQL primary instance (writer) from the list of Pods, to which `haproxy-replicas` Service directs connections, leaving only the reader instances.

| Value type       | Example            |
|------------------|--------------------|
| <b>☐</b> boolean | <code>false</code> |

### haproxy.replicasLoadBalancerSourceRanges

The range of client IP addresses from which the load balancer should be reachable (if not set, no limitations). **This option is deprecated and will be removed in future releases.** Use `haproxy.exposeReplicas.loadBalancerSourceRanges` instead.

| Value type      | Example                 |
|-----------------|-------------------------|
| <b>S</b> string | <code>10.0.0.0/8</code> |

### haproxy.exposeReplicas.loadBalancerSourceRanges

The range of client IP addresses from which the load balancer should be reachable (if not set, no limitations).

| Value type      | Example    |
|-----------------|------------|
| <b>S</b> string | 10.0.0.0/8 |

### haproxy.replicasLoadBalancerIP

The static IP-address for the replicas load balancer. **This option is deprecated and will be removed in future releases.** Use `haproxy.exposeReplicas.loadBalancerIP` instead.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | 127.0.0.1 |

### haproxy.exposeReplicas.loadBalancerIP

The static IP-address for the replicas load balancer.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | 127.0.0.1 |

### haproxy.replicasServiceType

Specifies the type of [Kubernetes Service](#) to be used for HAProxy replicas. **This option is deprecated and will be removed in future releases.** Use `haproxy.exposeReplicas.serviceType` instead.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | ClusterIP |

### haproxy.exposeReplicas.serviceType

Specifies the type of [Kubernetes Service](#) to be used for HAProxy replicas.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | ClusterIP |

### haproxy.replicasExternalTrafficPolicy

Specifies whether Service for HAProxy replicas should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness). **This option is deprecated and will be removed in future releases.** Use `haproxy.exposeReplicas.externalTrafficPolicy` instead.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Cluster |

### haproxy.exposeReplicas.externalTrafficPolicy

Specifies whether Service for HAProxy replicas should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Cluster |

### haproxy.exposeReplicas.internalTrafficPolicy

Specifies whether Service for HAProxy replicas should [route internal traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | Cluster |

### haproxy.replicasServiceLabels

The [Kubernetes labels](#) for the haproxy-replicas Service. **This option is deprecated and will be removed in future releases.** Use haproxy.exposeReplicas.labels instead.

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

### haproxy.exposeReplicas.labels

The [Kubernetes labels](#) for the haproxy-replicas Service.

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

### haproxy.replicasServiceAnnotations

The [Kubernetes annotations](#) metadata for the haproxy-replicas Service. **This option is deprecated and will be removed in future releases.** Use haproxy.exposeReplicas.annotations instead.

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp |

### haproxy.exposeReplicas.annotations

The [Kubernetes annotations](#) metadata for the haproxy-replicas Service.

| Value type      | Example  |
|-----------------|--|
| <b>S</b> string | service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp |

### haproxy.containerSecurityContext

A custom [Kubernetes Security Context for a Container](#) to be used instead of the default one.

| Value type | Example                       |
|------------|-------------------------------|
| ≡ subdoc   | <code>privileged: true</code> |

### haproxy.podSecurityContext

A custom [Kubernetes Security Context for a Pod](#) to be used instead of the default one.

| Value type | Example   |
|------------|---|
| ≡ subdoc   | <code>fsGroup: 1001<br/>supplementalGroups: [1001, 1002, 1003]</code> |

### haproxy.serviceAccountName

The [Kubernetes Service Account](#) for the HAProxy Pod.

| Value type      | Example   |
|-----------------|---|
| <b>S</b> string | <code>percona-xtradb-cluster-operator-workload</code> |

### haproxy.runtimeClassName

Name of the [Kubernetes Runtime Class](#) for the HAProxy Pod.

| Value type      | Example               |
|-----------------|-----------------------|
| <b>S</b> string | <code>image-rc</code> |

### haproxy.sidecars.image

Image for the [custom sidecar container](#) for the HAProxy Pod.

| Value type      | Example              |
|-----------------|----------------------|
| <b>S</b> string | <code>busybox</code> |

### haproxy.sidecars.command

Command for the [custom sidecar container](#) for the HAProxy Pod.

| Value type     | Example                  |
|----------------|--------------------------|
| <b>A</b> array | <code>["/bin/sh"]</code> |

### haproxy.sidecars.args

Command arguments for the [custom sidecar container](#) for the HAProxy Pod.

| Value type     | Example   |
|----------------|---|
| <b>A</b> array | <code>["-c", "while true; do trap 'exit 0' SIGINT SIGTERM SIGQUIT SIGKILL; done;"]</code> |


### haproxy.sidecars.name

Name of the [custom sidecar container](#) for the HAProxy Pod.

| Value type   | Example      |
|--|--------------|
|  string | my-sidecar-1 |


### haproxy.sidecars.resources.requests.memory

The [Kubernetes memory requests](#) for the sidecar HAProxy containers.

| Value type   | Example |
|--|---------|
|  string | 1G      |


### haproxy.sidecars.resources.requests.cpu

[Kubernetes CPU requests](#) for the sidecar HAProxy containers.

| Value type   | Example |
|--|---------|
|  string | 500m    |


### haproxy.sidecars.resources.limits.memory

[Kubernetes memory limits](#) for the sidecar HAProxy containers.

| Value type   | Example |
|--|---------|
|  string | 2G      |


### haproxy.sidecars.resources.limits.cpu

[Kubernetes CPU limits](#) for the sidecar HAProxy containers.

| Value type   | Example |
|--|---------|
|  string | 600m    |

### haproxy.lifecycle.preStop.exec.command


Command for the [preStop lifecycle hook](#) for HAProxy Pods.

| Value type  | Example       |
|---|---------------|
|  array | ["/bin/true"] |

### haproxy.lifecycle.postStart.exec.command

Command for the [postStart lifecycle hook](#) for HAProxy Pods.



| Value type  | Example                    |
|---|----------------------------|
|  array | <code>["/bin/true"]</code> |

## ProxySQL section

The `proxysql` section in the [deploy/cr.yaml](#) file contains configuration options for the ProxySQL daemon.


### `proxysql.enabled`

Enables or disables [load balancing with ProxySQL Services](#). ProxySQL can be enabled only at cluster creation time; otherwise you will be limited to HAProxy load balancing.

| Value type  | Example            |
|---|--------------------|
|  boolean | <code>false</code> |

### `proxysql.size`

The number of the ProxySQL daemons [to provide load balancing](#). It should be 2 or more unless the `spec.unsafeFlags.proxySize` key is set to true.

| Value type   | Example        |
|--|----------------|
|  int | <code>2</code> |


### `proxysql.image`

ProxySQL Docker image to use.

| Value type   | Example  |
|--|--|
|  string | <code>percona/percona-xtradb-cluster-operator:1.17.0-proxysql</code> |


### `proxysql.imagePullPolicy`

The [policy used to update images](#).

| Value type   | Example             |
|--|---------------------|
|  string | <code>Always</code> |

### `proxysql.imagePullSecrets.name`

The [Kubernetes imagePullSecrets](#) for the ProxySQL image.

| Value type   | Example                                   |
|--|---|
|  string | <code>private-registry-credentials</code> |

### `proxysql.readinessDelaySec`

Adds a delay before a run check to verify the application is ready to process traffic.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 15      |

### proxysql.livenessDelaySec

Adds a delay before the run check ensures the application is healthy and capable of processing requests.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 300     |

### proxysql.configuration

The [custom ProxySQL configuration file](#) contents.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string |         |

### proxysql.annotations

The [Kubernetes annotations](#) [↗](#) metadata.

| Value type     | Example                          |
|----------------|----------------------------------|
| <b>D</b> label | iam.amazonaws.com/role: role-arn |

### proxysql.labels

[Labels are key-value pairs attached to objects](#) [↗](#).

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

### proxysql.expose.enabled

Enable or disable exposing ProxySQL nodes with dedicated IP addresses.

| Value type       | Example |
|------------------|---------|
| <b>B</b> boolean | false   |

### proxysql.serviceType

Specifies the type of [Kubernetes Service](#) [↗](#) to be used. **This option is deprecated and will be removed in future releases.** Use `proxysql.expose.type` instead.

| Value type      | Example   |
|-----------------|-----------|
| <b>S</b> string | ClusterIP |

### proxysql.expose.type

Specifies the type of [Kubernetes Service](#) to be used.

| Value type                                 | Example   |
|--|-----------|
| <input checked="" type="checkbox"/> string | ClusterIP |

### proxysql.externalTrafficPolicy

Specifies whether Service for ProxySQL should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness). **This option is deprecated and will be removed in future releases.** Use `proxysql.expose.externalTrafficPolicy` instead.

| Value type                                 | Example |
|--|---------|
| <input checked="" type="checkbox"/> string | Local   |

### proxysql.expose.externalTrafficPolicy

Specifies whether Service for ProxySQL should [route external traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type                                 | Example |
|--|---------|
| <input checked="" type="checkbox"/> string | Local   |

### proxysql.expose.internalTrafficPolicy

Specifies whether Service for ProxySQL should [route internal traffic to cluster-wide or to node-local endpoints](#) (it can influence the load balancing effectiveness).

| Value type                                 | Example |
|--|---------|
| <input checked="" type="checkbox"/> string | Local   |

### proxysql.serviceAnnotations

The [Kubernetes annotations](#) metadata for the load balancer Service. **This option is deprecated and will be removed in future releases.** Use `proxysql.expose.annotations` instead.

| Value type                     | Example   |
|--------------------------------|---|
| <input type="checkbox"/> label | <code>service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp</code> |

### proxysql.expose.annotations

The [Kubernetes annotations](#) metadata for the load balancer Service.

| Value type                     | Example   |
|--------------------------------|---|
| <input type="checkbox"/> label | <code>service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp</code> |

### proxysql.serviceLabels

The [Kubernetes labels](#) for the load balancer Service. **This option is deprecated and will be removed in future releases.** Use `proxysql.expose.labels` instead.

| Value type | Example       |
|------------|---------------|
| ▷ label    | rack: rack-22 |

### `proxysql.expose.labels`

The [Kubernetes labels](#) for the load balancer Service.

| Value type | Example       |
|------------|---------------|
| ▷ label    | rack: rack-22 |

### `proxysql.loadBalancerSourceRanges`

The range of client IP addresses from which the load balancer should be reachable (if not set, there is no limitations). **This option is deprecated and will be removed in future releases.** Use `proxysql.expose.loadBalancerSourceRanges` instead.

| Value type | Example    |
|------------|------------|
| Ⓢ string   | 10.0.0.0/8 |

### `proxysql.expose.loadBalancerSourceRanges`

The range of client IP addresses from which the load balancer should be reachable (if not set, there is no limitations).

| Value type | Example    |
|------------|------------|
| Ⓢ string   | 10.0.0.0/8 |

### `proxysql.expose.loadBalancerIP`

The static IP-address for the load balancer.

| Value type | Example   |
|------------|-----------|
| Ⓢ string   | 127.0.0.1 |

### `proxysql.resources.requests.memory`

The [Kubernetes memory requests](#) for the main ProxySQL container.

| Value type | Example |
|------------|---------|
| Ⓢ string   | 1G      |

### `proxysql.resources.requests.cpu`

[Kubernetes CPU requests](#) for the main ProxySQL container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 600m    |

### proxysql.resources.limits.memory

[Kubernetes memory limits](#) for the main ProxySQL container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### proxysql.resources.limits.cpu

[Kubernetes CPU limits](#) for the main ProxySQL container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 700m    |

### proxysql.envVarsSecret

A secret with environment variables, see [Define environment variables](#) for details.

| Value type      | Example            |
|-----------------|--------------------|
| <b>S</b> string | my-env-var-secrets |

### proxysql.priorityClassName

The [Kubernetes Pod Priority class](#) for ProxySQL.

| Value type      | Example       |
|-----------------|---------------|
| <b>S</b> string | high-priority |

### proxysql.schedulerName

The [Kubernetes Scheduler](#).

| Value type      | Example            |
|-----------------|--------------------|
| <b>S</b> string | mycustom-scheduler |

### proxysql.nodeSelector

[Kubernetes nodeSelector](#).

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | disktype: ssd |

### proxysql.topologySpreadConstraints.labelSelector.matchLabels

The Label selector for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example   |
|------------|---|
| label      | app.kubernetes.io/name: percona-xtradb-cluster-operator |

### proxysql.topologySpreadConstraints.maxSkew

The degree to which Pods may be unevenly distributed under the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example |
|------------|---------|
| int        | 1       |

### proxysql.topologySpreadConstraints.topologyKey

The key of node labels for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example                |
|------------|------------------------|
| string     | kubernetes.io/hostname |

### proxysql.topologySpreadConstraints.whenUnsatisfiable

What to do with a Pod if it doesn't satisfy the [Kubernetes Pod Topology Spread Constraints](#).

| Value type | Example       |
|------------|---------------|
| string     | DoNotSchedule |

### proxysql.affinity.topologyKey

The Operator [topology\\_key](#) node anti-affinity constraint.

| Value type | Example                |
|------------|------------------------|
| string     | kubernetes.io/hostname |

### proxysql.affinity.advanced

If available it makes a [topologyKey](#) node affinity constraint to be ignored.

| Value type | Example |
|------------|---------|
| subdoc     |         |

### proxysql.tolerations

[Kubernetes Pod tolerations](#).

| Value type | Example   |
|------------|---|
| ☰ subdoc   | <code>node.alpha.kubernetes.io/unreachable</code> |

### `proxysql.volumeSpec.emptyDir`

The [Kubernetes emptyDir volume](#) [↗](#) The directory created on a node and accessible to the Percona XtraDB Cluster Pod containers.

| Value type | Example         |
|------------|-----------------|
| 📄 string   | <code>{}</code> |

### `proxysql.volumeSpec.hostPath.path`

[Kubernetes hostPath](#) [↗](#) The volume that mounts a directory from the host node's filesystem into your Pod. The path property is required.

| Value type | Example            |
|------------|--------------------|
| 📄 string   | <code>/data</code> |

### `proxysql.volumeSpec.hostPath.type`

The [Kubernetes hostPath](#) [↗](#). An optional property for the hostPath.

| Value type | Example                |
|------------|------------------------|
| 📄 string   | <code>Directory</code> |

### `proxysql.volumeSpec.persistentVolumeClaim.storageClassName`

Set the [Kubernetes storage class](#) [↗](#) to use with the Percona XtraDB Cluster [PersistentVolumeClaim](#) [↗](#).

| Value type | Example               |
|------------|-----------------------|
| 📄 string   | <code>standard</code> |

### `proxysql.volumeSpec.persistentVolumeClaim.accessModes`

The [Kubernetes PersistentVolumeClaim](#) [↗](#) access modes for the Percona XtraDB cluster.

| Value type | Example                      |
|------------|------------------------------|
| 📄 array    | <code>[ReadWriteOnce]</code> |


### `proxysql.volumeSpec.resources.requests.storage`

The [Kubernetes PersistentVolumeClaim](#) [↗](#) size for the Percona XtraDB cluster.

| Value type | Example          |
|------------|------------------|
| 📄 string   | <code>6Gi</code> |


### proxysql.podDisruptionBudget.maxUnavailable

The [Kubernetes podDisruptionBudget](#) specifies the number of Pods from the set unavailable after the eviction.

| Value type  | Example |
|---|---------|
|  int | 1       |


### proxysql.podDisruptionBudget.minAvailable

The [Kubernetes podDisruptionBudget](#) Pods that must be available after an eviction.

| Value type  | Example |
|---|---------|
|  int | 0       |


### proxysql.gracePeriod

The [Kubernetes grace period when terminating a Pod](#).

| Value type  | Example |
|---|---------|
|  int | 30      |


### proxysql.containerSecurityContext

A custom [Kubernetes Security Context for a Container](#) to be used instead of the default one.

| Value type   | Example          |
|--|------------------|
|  subdoc | privileged: true |


### proxysql.podSecurityContext

A custom [Kubernetes Security Context for a Pod](#) to be used instead of the default one.

| Value type   | Example   |
|--|---|
|  subdoc | fsGroup: 1001<br>supplementalGroups: [1001, 1002, 1003] |

### proxysql.serviceAccountName

The [Kubernetes Service Account](#) for the ProxySQL Pod.

| Value type   | Example                                  |
|--|--|
|  string | percona-xtradb-cluster-operator-workload |

### proxysql.runtimeClassName

Name of the [Kubernetes Runtime Class](#) for the ProxySQL Pod.



| Value type      | Example  |
|-----------------|----------|
| <b>S</b> string | image-rc |

### proxysql.sidecars.image

Image for the [custom sidecar container](#) for the ProxySQL Pod.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | busybox |

### proxysql.sidecars.command

Command for the [custom sidecar container](#) for the ProxySQL Pod.

| Value type     | Example     |
|----------------|-------------|
| <b>A</b> array | ["/bin/sh"] |

### proxysql.sidecars.args

Command arguments for the [custom sidecar container](#) for the ProxySQL Pod.

| Value type     | Example  |
|----------------|--|
| <b>A</b> array | ["-c", "while true; do trap 'exit 0' SIGINT SIGTERM SIGQUIT SIGKILL; done;"] |

### proxysql.sidecars.name

Name of the [custom sidecar container](#) for the ProxySQL Pod.

| Value type      | Example      |
|-----------------|--------------|
| <b>S</b> string | my-sidecar-1 |

### proxysql.sidecars.resources.requests.memory

The [Kubernetes memory requests](#) [↗](#) for the sidecar ProxySQL containers.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

### proxysql.sidecars.resources.requests.cpu

[Kubernetes CPU requests](#) [↗](#) for the sidecar ProxySQL containers.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 500m    |

### proxysql.sidecars.resources.limits.memory

[Kubernetes memory limits](#) for the sidecar ProxySQL containers.

| Value type | Example |
|------------|---------|
| string     | 2G      |

### proxysql.sidecars.resources.limits.cpu

[Kubernetes CPU limits](#) for the sidecar ProxySQL containers.

| Value type | Example |
|------------|---------|
| string     | 600m    |

### proxysql.lifecycle.preStop.exec.command

Command for the [preStop lifecycle hook](#) for ProxySQL Pods.

| Value type | Example       |
|------------|---------------|
| array      | ["/bin/true"] |

### proxysql.lifecycle.postStart.exec.command

Command for the [postStart lifecycle hook](#) for ProxySQL Pods.

| Value type | Example       |
|------------|---------------|
| array      | ["/bin/true"] |

## Log Collector section

The `logcollector` section in the [deploy/cr.yaml](#) file contains configuration options for [Fluent Bit Log Collector](#).

### logcollector.enabled

Enables or disables [cluster-level logging with Fluent Bit](#).

| Value type | Example |
|------------|---------|
| boolean    | true    |

### logcollector.image

Log Collector Docker image to use.

| Value type | Example  |
|------------|--|
| string     | percona/percona-xtradb-cluster-operator:1.6.0-logcollector |

### logcollector.configuration

Additional configuration options (see [Fluent Bit official documentation](#) for details).

| Value type | Example |
|------------|---------|
| ☰ subdoc   |         |

### logcollector.resources.requests.memory

The [Kubernetes memory requests](#) for a Log Collector sidecar container in a Percona XtraDB Cluster Pod.

| Value type | Example |
|------------|---------|
| 📄 string   | 100M    |

### logcollector.resources.requests.cpu

[Kubernetes CPU requests](#) for a Log collector sidecar container in a Percona XtraDB Cluster Pod.

| Value type | Example |
|------------|---------|
| 📄 string   | 200m    |

## Users section

The `users` section in the [deploy/cr.yaml](#) file contains various configuration options [to configure custom MySQL users via the Custom Resource](#).

### users.name

The username of the MySQL user.

| Value type | Example |
|------------|---------|
| 📄 string   | my-user |

### users.dbs

Databases that the user authenticates against. If the specified database is not present, the Operator will create it. When no databases specified, it defaults to all databases (\*). If the user sets administrative grants like SHUTDOWN, this field has to be omitted because administrative privileges are set on a global level.

| Value type | Example        |
|------------|----------------|
| 📄 array    | - db1<br>- db2 |

### users.hosts

Hosts that the users are supposed to connect from (if not specified, defaults to '%' - similar to what is happening in MySQL).

| Value type | Example     |
|------------|-------------|
| 📄 array    | - localhost |

### users.passwordSecretRef.name

Name of the secret that contains the user's password. If not provided, the Operator will create the `<cluster-name>-<custom-user-name>-secret` secret and generate password automatically.

| Value type      | Example          |
|-----------------|------------------|
| <b>S</b> string | my-user-password |

### **users.passwordSecretRef.key**

Key in the secret that corresponds to the value of the user's password (password by default).

| Value type      | Example  |
|-----------------|----------|
| <b>S</b> string | password |

### **spec.users.withGrantOption**

Defines if the user has grant options.

| Value type       | Example |
|------------------|---------|
| <b>C</b> boolean | false   |

### **users.grants**

Privileges granted to the user.

| Value type     | Example                          |
|----------------|----------------------------------|
| <b>A</b> array | - SELECT<br>- DELETE<br>- INSERT |

## **PMM section**

The `pmm` section in the [deploy/cr.yaml](#) file contains configuration options for Percona Monitoring and Management.

### **pmm.enabled**

Enables or disables [monitoring Percona XtraDB cluster with PMM](#).

| Value type       | Example |
|------------------|---------|
| <b>C</b> boolean | false   |

### **pmm.image**

PMM client Docker image to use.

| Value type      | Example                   |
|-----------------|---------------------------|
| <b>S</b> string | percona/pmm-client:2.44.0 |

### `pmm.serverHost`

Address of the PMM Server to collect data from the cluster.

| Value type            | Example                         |
|-----------------------|---------------------------------|
| <code>S</code> string | <code>monitoring-service</code> |

### `pmm.serverUser`

The PMM Server User. The PMM Server password should be configured using Secrets.

| Value type            | Example            |
|-----------------------|--------------------|
| <code>S</code> string | <code>admin</code> |

### `pmm.resources.requests.memory`

The [Kubernetes memory requests](#) for a PMM container.

| Value type            | Example           |
|-----------------------|-------------------|
| <code>S</code> string | <code>150M</code> |

### `pmm.resources.requests.cpu`

[Kubernetes CPU requests](#) for a PMM container.

| Value type            | Example           |
|-----------------------|-------------------|
| <code>S</code> string | <code>300m</code> |

### `pmm.pxcParams`

Additional parameters which will be passed to the [pmm-admin add mysql](#) command for `pxc` Pods.

| Value type            | Example                                      |
|-----------------------|--|
| <code>S</code> string | <code>--disable-tablestats-limit=2000</code> |

### `pmm.proxysqlParams`

Additional parameters which will be passed to the [pmm-admin add proxysql](#) command for `proxysql` Pods.

| Value type            | Example                                    |
|-----------------------|--|
| <code>S</code> string | <code>--custom-labels=CUSTOM-LABELS</code> |

### `pmm.containerSecurityContext`

A custom [Kubernetes Security Context for a Container](#) to be used instead of the default one.

| Value type | Example                        |
|------------|--------------------------------|
| ☰ subdoc   | <code>privileged: false</code> |

### **pmm.readinessProbes.initialDelaySeconds**

The number of seconds to wait before performing the first [readiness probe](#).

| Value type | Example |
|------------|---------|
| 📄 int      | 15      |

### **pmm.readinessProbes.timeoutSeconds**

The number of seconds after which the [readiness probe](#) times out.

| Value type | Example |
|------------|---------|
| 📄 int      | 15      |

### **pmm.readinessProbes.periodSeconds**

How often to perform the [readiness probe](#). Measured in seconds.

| Value type | Example |
|------------|---------|
| 📄 int      | 30      |

### **pmm.readinessProbes.successThreshold**

The number of successful probes required to mark the container successful.

| Value type | Example |
|------------|---------|
| 📄 int      | 1       |

### **pmm.readinessProbes.failureThreshold**

The number of failed probes required to mark the container unready.

| Value type | Example |
|------------|---------|
| 📄 int      | 5       |

### **pmm.livenessProbes.initialDelaySeconds**

The number of seconds to wait before performing the first [liveness probe](#).

| Value type | Example |
|------------|---------|
| 📄 int      | 300     |

### `pmm.livenessProbes.timeoutSeconds`

The number of seconds after which the [liveness probe](#) times out.

| Value type       | Example        |
|------------------|----------------|
| <code>int</code> | <code>5</code> |

### `pmm.livenessProbes.periodSeconds`

How often to perform the [liveness probe](#). Measured in seconds.

| Value type       | Example         |
|------------------|-----------------|
| <code>int</code> | <code>10</code> |

### `pmm.livenessProbes.successThreshold`

The number of successful probes required to mark the container successful.

| Value type       | Example        |
|------------------|----------------|
| <code>int</code> | <code>1</code> |

### `pmm.livenessProbes.failureThreshold`

The number of failed probes required to mark the container unhealthy.

| Value type       | Example        |
|------------------|----------------|
| <code>int</code> | <code>3</code> |

## Backup section

The `backup` section in the [deploy/cr.yaml](#) file contains the following configuration options for the regular Percona XtraDB Cluster backups.

### `backup.allowParallel`

Enables or disables running backup jobs in parallel. By default, parallel backup jobs are enabled. A user can disable them to prevent the cluster overload.

| Value type          | Example           |
|---------------------|-------------------|
| <code>string</code> | <code>true</code> |

### `backup.image`

The Percona XtraDB cluster Docker image to use for the backup.

| Value type          | Example  |
|---------------------|--|
| <code>string</code> | <code>percona/percona-xtradb-cluster-operator:1.17.0-backup</code> |

### `backup.backoffLimit`

The number of retries to make a backup (by default, 10 retries are made).

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 6       |

### **backup.activeDeadlineSeconds**

The timeout value in seconds, after which backup job will automatically fail.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 3600    |

### **backup.startingDeadlineSeconds**

The maximum time in seconds for a backup to start. The Operator compares the timestamp of the backup object against the current time. If the backup is not started within the set time, the Operator automatically marks it as “failed”.

You can override this setting for a specific backup in the `deploy/backup/backup.yaml` configuration file.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 300     |

### **backup.suspendedDeadlineSeconds**

The maximum time in seconds for a backup to remain in a suspended state. The Operator compares the timestamp when the backup job was suspended against the current time. After the defined suspension time expires, the backup is automatically marked as “failed”.

You can override this setting for a specific backup in the `deploy/backup/backup.yaml` configuration file.

| Value type   | Example |
|--------------|---------|
| <b>I</b> int | 1200    |

### **backup.imagePullSecrets.name**

The [Kubernetes imagePullSecrets](#) for the specified image.

| Value type      | Example                      |
|-----------------|------------------------------|
| <b>S</b> string | private-registry-credentials |

### **backup.storages.STORAGE-NAME.type**

The cloud storage type used for backups. Only `s3`, `azure`, and `filesystem` types are supported.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | s3      |

### **backup.storages.STORAGE-NAME.verifyTLS**



Enable or disable verification of the storage server TLS certificate. Disabling it may be useful e.g. to skip TLS verification for private S3-compatible storage with a self-issued certificate.

| Value type           | Example           |
|----------------------|-------------------|
| <code>boolean</code> | <code>true</code> |

#### `backup.storages.STORAGE-NAME.s3.credentialsSecret`

The [Kubernetes secret](#) for backups. It should contain `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY` keys.

| Value type          | Example                                |
|---------------------|--|
| <code>string</code> | <code>my-cluster-name-backup-s3</code> |

#### `backup.storages.STORAGE-NAME.s3.bucket`

The [Amazon S3 bucket](#) name for backups.

| Value type          | Example |
|---------------------|---------|
| <code>string</code> |         |

#### `backup.storages.STORAGE-NAME.s3.region`

The [AWS region](#) to use. Please note **this option is mandatory** for Amazon and all S3-compatible storages.

| Value type          | Example                |
|---------------------|------------------------|
| <code>string</code> | <code>us-east-1</code> |

#### `backup.storages.STORAGE-NAME.s3.endpointUrl`

The endpoint URL of the S3-compatible storage to be used (not needed for the original Amazon S3 cloud).

| Value type          | Example |
|---------------------|---------|
| <code>string</code> |         |

#### `backup.storages.STORAGE-NAME.persistentVolumeClaim.type`

The persistent volume claim storage type.

| Value type          | Example                 |
|---------------------|-------------------------|
| <code>string</code> | <code>filesystem</code> |

#### `backup.storages.STORAGE-NAME.persistentVolumeClaim.storageClassName`

Set the [Kubernetes Storage Class](#) to use with the Percona XtraDB Cluster backups [PersistentVolumeClaims](#) for the `filesystem` storage type.

| Value type      | Example  |
|-----------------|----------|
| <b>S</b> string | standard |

#### backup.storages.STORAGE-NAME.volume.persistentVolumeClaim.accessModes

The [Kubernetes PersistentVolume access modes](#) [↗](#).

| Value type     | Example         |
|----------------|-----------------|
| <b>A</b> array | [ReadWriteOnce] |

#### backup.storages.STORAGE-NAME.volume.persistentVolumeClaim.resources.requests.storage

Storage size for the PersistentVolume.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 6Gi     |

#### backup.storages.STORAGE-NAME.annotations

The [Kubernetes annotations](#) [↗](#).

| Value type     | Example                          |
|----------------|----------------------------------|
| <b>D</b> label | iam.amazonaws.com/role: role-arn |

#### backup.storages.STORAGE-NAME.labels

[Labels are key-value pairs attached to objects](#) [↗](#).

| Value type     | Example       |
|----------------|---------------|
| <b>D</b> label | rack: rack-22 |

#### backup.storages.STORAGE-NAME.resources.requests.memory

The [Kubernetes memory requests](#) [↗](#) for a Percona XtraBackup container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 1G      |

#### backup.storages.STORAGE-NAME.resources.requests.cpu

[Kubernetes CPU requests](#) [↗](#) for a Percona XtraBackup container.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 600m    |

### `backup.storages.STORAGE-NAME.resources.limits.memory`

[Kubernetes memory limits](#) for a Percona XtraBackup container.

| Value type            | Example |
|-----------------------|---------|
| <code>S</code> string | 1.5G    |

### `backup.storages.STORAGE-NAME.resources.limits.cpu`

[Kubernetes CPU limits](#) for a Percona XtraBackup container.

| Value type            | Example |
|-----------------------|---------|
| <code>S</code> string | 700m    |

### `backup.storages.STORAGE-NAME.nodeSelector`

[Kubernetes nodeSelector](#).

| Value type           | Example       |
|----------------------|---------------|
| <code>D</code> label | disktype: ssd |

### `backup.storages.STORAGE-NAME.topologySpreadConstraints.labelSelector.matchLabels`

The Label selector for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type           | Example   |
|----------------------|---|
| <code>D</code> label | app.kubernetes.io/name: percona-xtradb-cluster-operator |

### `backup.storages.STORAGE-NAME.topologySpreadConstraints.maxSkew`

The degree to which Pods may be unevenly distributed under the [Kubernetes Pod Topology Spread Constraints](#).

| Value type         | Example |
|--------------------|---------|
| <code>I</code> int | 1       |

### `backup.storages.STORAGE-NAME.topologySpreadConstraints.topologyKey`

The key of node labels for the [Kubernetes Pod Topology Spread Constraints](#).

| Value type            | Example                |
|-----------------------|------------------------|
| <code>S</code> string | kubernetes.io/hostname |

### `backup.storages.STORAGE-NAME.topologySpreadConstraints.whenUnsatisfiable`

What to do with a Pod if it doesn't satisfy the [Kubernetes Pod Topology Spread Constraints](#).

| Value type      | Example       |
|-----------------|---------------|
| <b>S</b> string | DoNotSchedule |

### backup.storages.STORAGE-NAME.affinity.nodeAffinity

The Operator [node affinity](#) constraint.

| Value type | Example |
|------------|---------|
| ≡ subdoc   |         |

### backup.storages.STORAGE-NAME.tolerations

[Kubernetes Pod tolerations](#).

| Value type | Example      |
|------------|--------------|
| ≡ subdoc   | backupWorker |

### backup.storages.STORAGE-NAME.priorityClassName

The [Kubernetes Pod priority class](#).

| Value type      | Example       |
|-----------------|---------------|
| <b>S</b> string | high-priority |

### backup.storages.STORAGE-NAME.schedulerName

The [Kubernetes Scheduler](#).

| Value type      | Example            |
|-----------------|--------------------|
| <b>S</b> string | mycustom-scheduler |

### backup.storages.STORAGE-NAME.containerSecurityContext

A custom [Kubernetes Security Context for a Container](#) to be used instead of the default one.

| Value type | Example          |
|------------|------------------|
| ≡ subdoc   | privileged: true |

### backup.storages.STORAGE-NAME.podSecurityContext

A custom [Kubernetes Security Context for a Pod](#) to be used instead of the default one.

| Value type | Example   |
|------------|---|
| ≡ subdoc   | fsGroup: 1001<br>supplementalGroups: [1001, 1002, 1003] |

### backup.storages.STORAGE-NAME.containerOptions.env

The [environment variables set as key-value pairs](#) for the backup container.

| Value type | Example                              |
|------------|--------------------------------------|
| ☰ subdoc   | - name: VERIFY_TLS<br>value: "false" |

### backup.storages.STORAGE-NAME.containerOptions.args.xtrabackup

Custom [command line options](#) for the `xtrabackup` Percona XtraBackup tool.

| Value type | Example            |
|------------|--------------------|
| ☰ subdoc   | - "--someflag=abc" |

### backup.storages.STORAGE-NAME.containerOptions.args.xbcloud

Custom [command line options](#) for the `xbcloud` Percona XtraBackup tool.

| Value type | Example            |
|------------|--------------------|
| ☰ subdoc   | - "--someflag=abc" |

### backup.storages.STORAGE-NAME.containerOptions.args.xbstream

Custom [command line options](#) for the `xbstream` Percona XtraBackup tool.

| Value type | Example            |
|------------|--------------------|
| ☰ subdoc   | - "--someflag=abc" |

### backup.schedule.name

The backup name.

| Value type | Example          |
|------------|------------------|
| 📄 string   | sat-night-backup |

### backup.schedule.schedule

Scheduled time to make a backup specified in the [crontab format](#).

| Value type | Example     |
|------------|-------------|
| 📄 string   | 0 0 \* \* 6 |

### backup.schedule.keep

The amount of most recent backups to store. Older backups are automatically deleted. Set `keep` to zero or completely remove it to disable automatic deletion of backups.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 3       |

### **backup.schedule.storageName**

The name of the storage for the backups configured in the `storages` or `fs-pvc` subsection.

| Value type      | Example    |
|-----------------|------------|
| <b>s</b> string | s3-us-west |

### **backup.pitr.enabled**

Enables or disables [point-in-time-recovery functionality](#).

| Value type       | Example |
|------------------|---------|
| <b>b</b> boolean | false   |

### **backup.pitr.storageName**

The name of the storage for the backups configured in the `storages` subsection, which will be reused to store binlog for point-in-time-recovery.

| Value type      | Example    |
|-----------------|------------|
| <b>s</b> string | s3-us-west |

### **backup.pitr.timeBetweenUploads**

Seconds between running the binlog uploader.

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 60      |

### **backup.pitr.timeoutSeconds**

Timeout in seconds for the binlog to be uploaded; the binlog uploader container will be restarted after exceeding this timeout |

| Value type   | Example |
|--------------|---------|
| <b>i</b> int | 60      |

### **backup.pitr.resources.requests.memory**

The [Kubernetes memory requests](#) [↗](#) for a binlog collector Pod.

| Value type      | Example |
|-----------------|---------|
| <b>s</b> string | 0.1G    |

### backup.pitr.resources.requests.cpu

[Kubernetes CPU requests](#) for a binlog collector Pod.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 100m    |

### backup.pitr.resources.limits.memory

[Kubernetes memory limits](#) for a binlog collector Pod. | Value type | Example | | ----- | ----- | | **S** string | 1G |

### backup.pitr.resources.limits.cpu

[Kubernetes CPU limits](#) for a binlog collector Pod.

| Value type      | Example |
|-----------------|---------|
| <b>S</b> string | 700m    |

## PerconaXtraDBClusterRestore Custom Resource options

[Percona XtraDB Cluster Restore](#) options are managed by the Operator via the `PerconaXtraDBClusterRestore` [Custom Resource](#) and can be configured via the [deploy/backup/restore.yaml](#) configuration file. This Custom Resource contains the following options:

| Key               | Value type             | Description  | Required |
|-------------------|------------------------|--|----------|
| metadata.name     | string                 | The name of the restore  | true     |
| spec.pxcCluster   | string                 | Percona XtraDB Cluster name (the name of your running cluster) | true     |
| spec.backupName   | string                 | The name of the backup which should be restored                | false    |
| spec.resources    | <a href="#">subdoc</a> | Defines resources limits for the restore job                   | false    |
| spec.backupSource | <a href="#">subdoc</a> | Defines configuration for different restore sources            | false    |
| spec.pitr         | <a href="#">subdoc</a> | Defines configuration for PITR restore                         | false    |

### resources section

| Key             | Value type | Description   | Required |
|-----------------|------------|---|----------|
| requests.memory | string     | The <a href="#">Kubernetes memory requests</a> for the restore job (the specified value is used if memory limits are not set) | false    |
| requests.cpu    | string     | <a href="#">Kubernetes CPU requests</a> for the restore job (the specified value is used if CPU limits are not set)           | false    |
| limits.memory   | string     | The <a href="#">Kubernetes memory limits</a> for the restore job (if set, the value will be used for memory requests as well) | false    |
| limits.cpu      | string     | <a href="#">Kubernetes CPU limits</a> for the restore job (if set, the value will be used for CPU requests as well)           | false    |

### backupSource section

| Key         | Value type             | Description   | Required |
|-------------|------------------------|---|----------|
| destination | string                 | Path to the backup  | false    |
| storageName | string                 | The storage name from CR <code>spec.backup.storages</code>  | false    |
| verifyTLS   | boolean                | Enable or disable verification of the storage server TLS certificate. Disabling it may be useful e.g. to skip TLS verification for private S3-compatible storage with a self-issued certificate | true     |
| s3          | <a href="#">subdoc</a> | Define configuration for S3 compatible storages   | false    |
| azure       | <a href="#">subdoc</a> | Define configuration for azure blob storage   | false    |

### backupSource.s3 subsection

| Key               | Value type | Description                               | Required |
|-------------------|------------|---|----------|
| bucket            | string     | The bucket with a backup                  | true     |
| credentialsSecret | string     | The Secret name for the backup            | true     |
| endpointUrl       | string     | A valid endpoint URL                      | false    |
| region            | string     | The region corresponding to the S3 bucket | false    |

### backupSource.azure subsection

| Key               | Value type | Description  | Required |
|-------------------|------------|--|----------|
| credentialsSecret | string     | The Secret name for the azure blob storage                                   | true     |
| container         | string     | The container name of the azure blob storage                                 | true     |
| endpointUrl       | string     | A valid endpoint URL   | false    |
| storageClass      | string     | The storage class name of the azure blob storage                             | false    |
| blockSize         | integer    | The size of a block of data to save and retrieve from the azure blob storage |          |
| concurrency       | integer    | The number of writers to the same blob                                       |          |

### pitr subsection

| Key               | Value type             | Description                                      | Required |
|-------------------|------------------------|--|----------|
| type              | string                 | The type of PITR recover                         | true     |
| date              | string                 | The exact date of recovery                       | true     |
| gtid              | string                 | The exact GTID for PITR recover                  | true     |
| spec.backupSource | <a href="#">subdoc</a> | Percona XtraDB Cluster backups section           | true     |
| s3                | <a href="#">subdoc</a> | Defines configuration for S3 compatible storages | false    |
| azure             | <a href="#">subdoc</a> | Defines configuration for azure blob storage     | false    |



# Percona certified images

Find Percona's certified Docker images that you can use with the Percona Operator for MySQL based on Percona XtraDB Cluster in the following table.

## Images released with the Operator version 1.17.0:

| Image  | Digest   |
|--|--|
| percona/percona-xtradb-cluster-operator:1.17.0 (x86_64)                    | da9aa5c7cb546c60624b927bdd273fc3646bc5a027bcc6f138291bad4da9b7b8 |
| percona/percona-xtradb-cluster-operator:1.17.0 (ARM64)                     | 2b61ed62848521071bea18988461e99123ea5d5a92465ab046d0f179b5c0b8ac |
| percona/haproxy:2.8.14   | 6de8c402d83b88dae7403c05183fd75100774defa887c05a57ec04bc25be2305 |
| percona/proxysql:2.2.7.1   | 975d5c8cc7b5714a0df4dfd2111391a7a79cfa3a217f1dd6de77a83550812fc4 |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc8.4-backup-pxb8.4.0      | 3a7a8a47ad12ce783feb089e7035d50f6d5b803cec97a16067f476a426f6da8  |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35     | 2f28c09027a249426b2f4393aa8b76971583d80e0c56be37f77dad49cb5cd5c4 |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29     | bf494243d9784a016bb4c98bd2690b0fc5fba1aa7d45d98502dff353fb68bee  |
| percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0 | 9fc0b4097c93f6dba8441d9bcb2803dc62dd8328b84288294444fbadb347f6d7 |
| percona/pmm-client:2.44.0  | 19a07dfa8c12a0554308cd11d7d38494ea02a14cfac6c051ce8ff254b7d0a4a7 |
| percona/percona-xtradb-cluster:8.4.3-3.1                                   | b7b198133e70cb1bd9d5cd1730373a62e976fd2b9bb9ca5a696fd970c1ac09bf |
| percona/percona-xtradb-cluster:8.0.41-32.1                                 | 8a6799cbded5524c6979442f8d7097831c8c6481f5106a856b44b2791ccaf0fb |
| percona/percona-xtradb-cluster:8.0.39-30.1                                 | 6a53a6ad4e7d2c2fb404d274d993414a22cb67beecf7228df9d5d994e7a09966 |
| percona/percona-xtradb-cluster:8.0.36-28.1                                 | b5cc4034ccfb0186d6a734cb749ae17f013b027e9e64746b2c876e8beef379b3 |
| percona/percona-xtradb-cluster:8.0.35-27.1                                 | 1ef24953591ef1c1ce39576843d5615d4060fd09458c7a39ebc3e2eda7ef486b |
| percona/percona-xtradb-cluster:8.0.32-24.2                                 | 1f978ab8912e1b5fc66570529cb7e7a4ec6a38adbfce1ece78159b0fca7d47a  |
| percona/percona-xtradb-cluster:5.7.44-31.65                                | 36fafdef46485839d4ff7c6dc73b4542b07031644c0152e911acb9734ff2be85 |
| percona/percona-xtradb-cluster:5.7.42-31.65                                | 9dab86780f86ec9caf8e1032a563c131904b75a37edeaac159a93f7d0c16c603 |
| percona/percona-xtradb-cluster:5.7.39-31.61                                | 9013170a71559bbac92ba9c2e986db9bda3a8a9e39ee1ee350e0ee94488bb6d7 |
| percona/percona-xtradb-cluster:5.7.36-31.55                                | c7bad990fc7ca0fde89240e921052f49da08b67c7c6dc54239593d61710be504 |
| percona/percona-xtradb-cluster:5.7.34-31.51                                | f8d51d7932b9bb1a5a896c7ae440256230eb69b55798ff37397aabfd58b80ccb |

## Image tag format

Image tags have the format:

`operator_version-[pxc_version]-[component_name]-[component_version]`

Image tags start with the Operator's version and include a number of optional fields:

- the Percona XtraDB Cluster version (`pxc8.0.36`),
- the component name in the image (`haproxy`, `backup`, etc.), and
- the version of this component (`pxb8.0.35`).

An example looks as follows: `1.16.0-pxc8.0-backup-pxb8.0.35`

Percona XtraDB Cluster versions may have different detailization (“pxc” prefix with major and minor numbers, like “pxc8.0”, or with minor, major, and patch numbers, like “pxc8.0.36”, or the full XtraDB Cluster version without prefix: major, minor, and patch numbers followed by a dash and the version of Percona Server this XtraDB Cluster version is based on, like “8.0.36-28.1”).

Note, that PMM Client images have their own tags. They contain the version of PMM.

[Find images for previous versions](#) 

# Versions compatibility

Versions of the cluster components and platforms tested with different Operator releases are shown below. Other version combinations may also work but have not been tested.

## Cluster components:

| Operator               | <a href="#">MySQL</a>        | <a href="#">Percona XtraBackup</a>                                     | <a href="#">HA Proxy</a> | <a href="#">ProxySQL</a> |
|------------------------|------------------------------|--|--------------------------|--------------------------|
| <a href="#">1.17.0</a> | 8.4 (Tech preview), 8.0, 5.7 | 8.4.0-1 for MySQL 8.4, 8.0.35-32 for MySQL 8.0, 2.4.29 for MySQL 5.7   | 2.8.14                   | 2.7.1-1                  |
| <a href="#">1.16.1</a> | 8.4 (Tech preview), 8.0, 5.7 | 8.4.0-1 for MySQL 8.4, 8.0.35-30.1 for MySQL 8.0, 2.4.29 for MySQL 5.7 | 2.8.11                   | 2.7.1                    |
| <a href="#">1.16.0</a> | 8.4 (Tech preview), 8.0, 5.7 | 8.4.0-1 for MySQL 8.4, 8.0.35-30.1 for MySQL 8.0, 2.4.29 for MySQL 5.7 | 2.8.11                   | 2.7.1                    |
| <a href="#">1.15.1</a> | 8.0, 5.7                     | 8.0.35-30.1 for MySQL 8.0, 2.4.29-1 for MySQL 5.7                      | 2.8.5                    | 2.5.5                    |
| <a href="#">1.14.1</a> | 8.0, 5.7                     | 8.0.35-30.1 for MySQL 8.0, 2.4.29-1 for MySQL 5.7                      | 2.8.5-1                  | 2.5.5-1.1                |
| <a href="#">1.15.0</a> | 8.0, 5.7                     | 8.0.35-30.1 for MySQL 8.0, 2.4.29-1 for MySQL 5.7                      | 2.8.5                    | 2.5.5                    |
| <a href="#">1.14.0</a> | 8.0, 5.7                     | 8.0.35-30.1 for MySQL 8.0, 2.4.29-1 for MySQL 5.7                      | 2.8.5-1                  | 2.5.5-1.1                |
| <a href="#">1.13.0</a> | 8.0, 5.7                     | 8.0.32-26 for MySQL 8.0, 2.4.28 for MySQL 5.7                          | 2.6.12                   | 2.5.1-1.1                |
| <a href="#">1.12.0</a> | 8.0, 5.7                     | 8.0.30-23 for MySQL 8.0, 2.4.26 for MySQL 5.7                          | 2.5.6                    | 2.4.4                    |
| <a href="#">1.11.0</a> | 8.0, 5.7                     | 8.0.27-19 for MySQL 8.0, 2.4.26 for MySQL 5.7                          | 2.4.15                   | 2.3.2                    |
| <a href="#">1.10.0</a> | 8.0, 5.7                     | 8.0.23-16 for MySQL 8.0, 2.4.24 for MySQL 5.7                          | 2.3.14                   | 2.0.18                   |
| <a href="#">1.9.0</a>  | 8.0, 5.7                     | 8.0.23-16 for MySQL 8.0, 2.4.23 for MySQL 5.7                          | 2.3.10                   | 2.0.18                   |
| <a href="#">1.8.0</a>  | 8.0, 5.7                     | 8.0.23-16 for MySQL 8.0, 2.4.22 for MySQL 5.7                          | 2.3.2                    | 2.0.17                   |
| <a href="#">1.7.0</a>  | 8.0, 5.7                     | 8.0.22-15 for MySQL 8.0, 2.4.21 for MySQL 5.7                          | 2.1.7                    | 2.0.15                   |
| <a href="#">1.6.0</a>  | 8.0, 5.7                     | 8.0.14 for MySQL 8.0, 2.4.20 for MySQL 5.7                             | 2.1.7                    | 2.0.14                   |
| <a href="#">1.5.0</a>  | 8.0, 5.7                     | 8.0.13 for MySQL 8.0, 2.4.20 for MySQL 5.7                             | 2.1.7                    | 2.0.12                   |
| <a href="#">1.4.0</a>  | 8.0, 5.7                     | 8.0.11 for MySQL 8.0, 2.4.20 for MySQL 5.7                             | -                        | 2.0.10                   |
| <a href="#">1.3.0</a>  | 5.7                          | 2.4.18   | -                        | 2.0.6                    |
| <a href="#">1.2.0</a>  | 5.7                          | 2.4.14   | -                        | 2.0.6                    |
| <a href="#">1.1.0</a>  | 5.7                          | 2.4.14   | -                        | 2.0.4                    |

## Platforms:

| Operator               | <a href="#">GKE</a> | <a href="#">EKS</a> | <a href="#">Openshift</a> | <a href="#">AKS</a> | <a href="#">Minikube</a> |
|------------------------|---------------------|---------------------|---------------------------|---------------------|--------------------------|
| <a href="#">1.17.0</a> | 1.29 - 1.32         | 1.30 - 1.32         | 4.14 - 4.18               | 1.30 - 1.32         | 1.35.0                   |
| <a href="#">1.16.1</a> | 1.28 - 1.30         | 1.28 - 1.31         | 4.15.42 - 4.17.8          | 1.28 - 1.31         | 1.34.0                   |

| Operator               | <a href="#">GKE</a> | <a href="#">EKS</a> | <a href="#">Openshift</a> | <a href="#">AKS</a> | <a href="#">Minikube</a> |
|------------------------|---------------------|---------------------|---------------------------|---------------------|--------------------------|
| <a href="#">1.16.0</a> | 1.28 - 1.30         | 1.28 - 1.31         | 4.15.42 - 4.17.8          | 1.28 - 1.31         | 1.34.0                   |
| <a href="#">1.15.1</a> | 1.27 - 1.30         | 1.28 - 1.30         | 4.13.46 - 4.16.7          | 1.28 - 1.30         | 1.33.1                   |
| <a href="#">1.14.1</a> | 1.25 - 1.29         | 1.24 - 1.29         | 4.12.50 - 4.14.13         | 1.26 - 1.28         | 1.32.0                   |
| <a href="#">1.15.0</a> | 1.27 - 1.30         | 1.28 - 1.30         | 4.13.46 - 4.16.7          | 1.28 - 1.30         | 1.33.1                   |
| <a href="#">1.14.0</a> | 1.25 - 1.29         | 1.24 - 1.29         | 4.12.50 - 4.14.13         | 1.26 - 1.28         | 1.32.0                   |
| <a href="#">1.13.0</a> | 1.24 - 1.27         | 1.23 - 1.27         | 4.10 - 4.13               | 1.24 - 1.26         | 1.30                     |
| <a href="#">1.12.0</a> | 1.21 - 1.24         | 1.21 - 1.24         | 4.10 - 4.11               | 1.22 - 1.24         | 1.28                     |
| <a href="#">1.11.0</a> | 1.20 - 1.23         | 1.20 - 1.22         | 4.7 - 4.10                | -                   | 1.23                     |
| <a href="#">1.10.0</a> | 1.19 - 1.22         | 1.17 - 1.21         | 4.7 - 4.9                 | -                   | 1.22                     |
| <a href="#">1.9.0</a>  | 1.16, 1.20          | 1.19                | 3.11, 4.7                 | -                   | 1.19                     |
| <a href="#">1.8.0</a>  | 1.16, 1.20          | 1.19                | 3.11, 4.7                 | -                   | 1.19                     |
| <a href="#">1.7.0</a>  | 1.15, 1.17          | 1.15                | 3.11, 4.6                 | -                   | 1.16                     |
| <a href="#">1.6.0</a>  | 1.15, 1.17          | 1.15                | 3.11, 4.5                 | -                   | 1.10                     |
| <a href="#">1.5.0</a>  | 1.13, 1.15          | 1.15                | 3.11, 4.2                 | -                   | 1.16                     |
| <a href="#">1.4.0</a>  | 1.13, 1.15          | 1.15                | 3.11, 4.2                 | -                   | 1.16                     |
| <a href="#">1.3.0</a>  | 1.11, 1.14          | -                   | 3.11, 4.1                 | -                   | 1.12                     |
| <a href="#">1.2.0</a>  | +                   | -                   | 3.11                      | -                   | +                        |
| <a href="#">1.1.0</a>  | +                   | -                   | 3.11                      | -                   | +                        |

More detailed information about the cluster components for the current version of the Operator can be found [in the system requirements](#) and [in the list of certified images](#). For previous releases of the Operator, you can check the same pages [in the documentation archive](#).

# Percona Operator for MySQL API Documentation

Percona Operator for MySQL based on Percona XtraDB Cluster provides an [aggregation-layer extension for the Kubernetes API](#). Please refer to the [official Kubernetes API documentation](#) on the API access and usage details. The following subsections describe the Percona XtraDB Cluster API provided by the Operator.

## Prerequisites

1. Create the namespace name you will use, if not exist:

```
$ kubectl create namespace my-namespace-name
```

Trying to create an already-existing namespace will show you a self-explanatory error message. Also, you can use the `default` namespace.

### Note

In this document `default` namespace is used in all examples. Substitute `default` with your namespace name if you use a different one.

2. Prepare

```
# set correct API address
KUBE_CLUSTER=$(kubectl config view --minify -o jsonpath='{.clusters[0].name}')
API_SERVER=$(kubectl config view -o jsonpath="{.clusters[?(@.name=\"$KUBE_CLUSTER\")].cluster.server}" | sed -e 's#https://##')

# create service account and get token
kubectl apply --server-side -f deploy/crd.yaml -f deploy/rbac.yaml -n default
KUBE_TOKEN=$(kubectl get secret $(kubectl get serviceaccount percona-xtradb-cluster-operator -o jsonpath='{.secrets[0].name}' -n default) -o jsonpath='{.data.token}' -n default | base64 --decode)
```

## Create new Percona XtraDB Cluster

### Description:

The command to create a new Percona XtraDB Cluster with all its resources

### Kubectl Command:

```
$ kubectl apply -f percona-xtradb-cluster-operator/deploy/cr.yaml
```

### URL:

```
https://$API_SERVER/apis/pxc.percona.com/v{{ apiversion }}/namespaces/default/perconaxtradbclusters
```

### Authentication:

```
Authorization: Bearer $KUBE_TOKEN
```

### cURL Request:

```
$ curl -k -v -XPOST "https://$API_SERVER/apis/pxc.percona.com/v{{ apiversion }}/namespaces/default/perconaxtradbclusters" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "Authorization: Bearer $KUBE_TOKEN" \
-d "@cluster.json"
```

### Request Body (cluster.json):



```

{
  "apiVersion": "pxc.percona.com/v1-5-0",
  "kind": "PerconaXtraDBCluster",
  "metadata": {
    "name": "cluster1",
    "finalizers": [
      "delete-pxc-pods-in-order"
    ]
  },
  "spec": {
    "secretsName": "my-cluster-secrets",
    "vaultSecretName": "keyring-secret-vault",
    "sslSecretName": "my-cluster-ssl",
    "sslInternalSecretName": "my-cluster-ssl-internal",
    "allowUnsafeConfigurations": true,
    "pxc": {
      "size": 3,
      "image": "percona/percona-xtradb-cluster:8.0.19-10.1",
      "resources": {
        "requests": null
      },
      "affinity": {
        "antiAffinityTopologyKey": "none"
      },
      "podDisruptionBudget": {
        "maxUnavailable": 1
      },
      "volumeSpec": {
        "persistentVolumeClaim": {
          "resources": {
            "requests": {
              "storage": "6Gi"
            }
          }
        }
      },
      "gracePeriod": 600
    },
    "proxysql": {
      "enabled": true,
      "size": 3,
      "image": "percona/percona-xtradb-cluster-operator:1.5.0-proxysql",
      "resources": {
        "requests": null
      },
      "affinity": {
        "antiAffinityTopologyKey": "none"
      },
      "volumeSpec": {
        "persistentVolumeClaim": {
          "resources": {
            "requests": {
              "storage": "2Gi"
            }
          }
        }
      },
      "podDisruptionBudget": {
        "maxUnavailable": 1
      },
      "gracePeriod": 30
    },
    "pmm": {
      "enabled": false,
      "image": "percona/percona-xtradb-cluster-operator:1.5.0-pmm",
      "serverHost": "monitoring-service",
      "serverUser": "pmm"
    },
    "backup": {
      "image": "percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup",
      "serviceAccountName": "percona-xtradb-cluster-operator",
      "storages": {
        "s3-us-west": {
          "type": "s3",
          "s3": {
            "bucket": "S3-BACKUP-BUCKET-NAME-HERE",
            "credentialsSecret": "my-cluster-name-backup-s3",
            "region": "us-west-2"
          }
        }
      },
      "fs-pvc": {
        "type": "filesystem",
        "volume": {
          "persistentVolumeClaim": {
            "accessModes": [
              "ReadWriteOnce"
            ]
          }
        }
      }
    }
  }
}

```

```
    ],
    "resources":{
      "requests":{
        "storage":"6Gi"
      }
    }
  }
},
"schedule":[
  {
    "name":"sat-night-backup",
    "schedule":"0 0 * * 6",
    "keep":3,
    "storageName":"s3-us-west"
  },
  {
    "name":"daily-backup",
    "schedule":"0 0 * * *",
    "keep":5,
    "storageName":"fs-pvc"
  }
]
}
}
```

**Inputs:**



**Metadata:**

1. Name (String, min-length: 1) : contains name of cluster
2. Finalizers (list of string, Default: ["delete-pxc-pods-in-order"]) contains steps to do when deleting the cluster

**Spec:**

1. secretsName (String, min-length: 1) : contains name of secret to create for the cluster
2. vaultSecretName (String, min-length: 1) : contains name of vault secret to create for the cluster
3. sslInternalSecretName (String, min-length: 1) : contains name of ssl secret to create for the cluster
4. allowUnsafeConfigurations (Boolean, Default: false) : allow unsafe configurations to run

**pxc:**

1. Size (Int, min-value: 1, default, 3) : number of Percona XtraDB Cluster nodes to create
2. Image (String, min-length: 1) : contains image name to use for Percona XtraDB Cluster nodes
3. volumeSpec : storage (SizeString, default: "6Gi") : contains the size for the storage volume of Percona XtraDB Cluster nodes
4. gracePeriod (Int, default: 600, min-value: 0) : contains the time to wait for Percona XtraDB Cluster node to shutdown in milliseconds

**proxysql:**

1. Enabled (Boolean, default: true) : enabled or disables proxysql

**pmm:**

1. serverHost (String, min-length: 1) : service name for monitoring
2. serverUser (String, min-length: 1) : name of pmm user
3. image (String, min-length: 1) : name of pmm image

**backup:**

1. Storages (Object) : contains the storage destinations to save the backups in
2. schedule:
  - a. name (String, min-length: 1) : name of backup job
  - b. schedule (String, Cron format: "\\* \\* \\* \\* \\*") : contains cron schedule format for when to run cron jobs
  - c. keep (Int, min-value = 1) : number of backups to keep
  - d. storageName (String, min-length: 1) : name of storage object to use

**Response:**



```

{
  "apiVersion": "pxc.percona.com/v1-5-0",
  "kind": "PerconaXtraDBCluster",
  "metadata": {
    "creationTimestamp": "2020-05-27T22:23:58Z",
    "finalizers": [
      "delete-pxc-pods-in-order"
    ],
    "generation": 1,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1-5-0",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:metadata": {
            "f:finalizers": {
            }
          },
          "f:spec": {
            ".": {
            },
            "f:allowUnsafeConfigurations": {
            },
            "f:backup": {
              ".": {
              },
              "f:image": {
              },
            },
            "f:schedule": {
            },
            "f:serviceAccountName": {
            },
            "f:storages": {
              ".": {
              },
              "f:fs-pvc": {
                ".": {
                },
                "f:type": {
                },
                "f:volume": {
                  ".": {
                  },
                  "f:persistentVolumeClaim": {
                    ".": {
                    },
                    "f:accessModes": {
                    },
                    "f:resources": {
                      ".": {
                      },
                      "f:requests": {
                        ".": {
                        },
                        "f:storage": {
                        }
                      }
                    }
                  }
                }
              }
            },
            "f:s3-us-west": {
              ".": {
              },
              "f:s3": {
                ".": {
                },
                "f:bucket": {

```

```

        },
        "f:credentialsSecret":{
            },
            "f:region":{
                }
            },
            "f:type":{
                }
            }
        },
        "f:pmm":{
            ".":{
                },
                "f:enabled":{
                    },
                    "f:image":{
                        },
                        "f:serverHost":{
                            },
                            "f:serverUser":{
                                }
                            }
                        },
                        "f:proxysql":{
                            ".":{
                                },
                                "f:affinity":{
                                    ".":{
                                        },
                                        "f:antiAffinityTopologyKey":{
                                            }
                                        }
                                    },
                                    "f:enabled":{
                                        },
                                        "f:gracePeriod":{
                                            },
                                            "f:image":{
                                                },
                                                "f:podDisruptionBudget":{
                                                    ".":{
                                                        },
                                                        "f:maxUnavailable":{
                                                            }
                                                        }
                                                    },
                                                    "f:resources":{
                                                        ".":{
                                                            },
                                                            "f:requests":{
                                                                }
                                                            }
                                                        },
                                                        "f:size":{
                                                            },
                                                            "f:volumeSpec":{
                                                                ".":{
                                                                    },
                                                                    "f:persistentVolumeClaim":{
                                                                        ".":{
                                                                            },
                                                                            "f:resources":{
                                                                                ".":{
                                                                                    },
                                                                                    "f:requests":{
                                                                                        ".":{

```

```

        },
        "f:storage":{
            }
        }
    }
},
"f:pxc":{
    ".":{
        },
        "f:affinity":{
            ".":{
                },
                "f:antiAffinityTopologyKey":{
                    }
                },
            "f:gracePeriod":{
                },
            "f:image":{
                },
            "f:podDisruptionBudget":{
                ".":{
                    },
                    "f:maxUnavailable":{
                        }
                    },
                },
            "f:resources":{
                ".":{
                    },
                    "f:requests":{
                        }
                    },
                },
            "f:size":{
                },
            "f:volumeSpec":{
                ".":{
                    },
                    "f:persistentVolumeClaim":{
                        ".":{
                            },
                            "f:resources":{
                                ".":{
                                    },
                                    "f:requests":{
                                        ".":{
                                            },
                                            "f:storage":{
                                                }
                                            }
                                        }
                                    }
                                }
                            }
                        }
                    },
                "f:secretsName":{
                    },
                    "f:sslInternalSecretName":{
                        },
                        "f:sslSecretName":{
                            },
                            "f:vaultSecretName":{
                                }
                            }
                        }
                    },
    "manager":"kubect1",
    "operation":"Update",
    "time":"2020-05-27T22:23:58Z"
}

```

```

    }
  ],
  "name": "cluster1",
  "namespace": "default",
  "resourceVersion": "8694",
  "selfLink": "/apis/pxc.percona.com/v1-5-0/namespaces/default/perconaxtradbclusters/cluster1",
  "uid": "e9115e2a-49df-4ebf-9dab-fa5a550208d3"
},
"spec": {
  "allowUnsafeConfigurations": false,
  "backup": {
    "image": "percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup",
    "schedule": [
      {
        "keep": 3,
        "name": "sat-night-backup",
        "schedule": "0 0 * * 6",
        "storageName": "s3-us-west"
      },
      {
        "keep": 5,
        "name": "daily-backup",
        "schedule": "0 0 * * *",
        "storageName": "fs-pvc"
      }
    ]
  },
  "serviceAccountName": "percona-xtradb-cluster-operator",
  "storages": {
    "fs-pvc": {
      "type": "filesystem",
      "volume": {
        "persistentVolumeClaim": {
          "accessModes": [
            "ReadWriteOnce"
          ],
          "resources": {
            "requests": {
              "storage": "6Gi"
            }
          }
        }
      }
    },
    "s3-us-west": {
      "s3": {
        "bucket": "S3-BACKUP-BUCKET-NAME-HERE",
        "credentialsSecret": "my-cluster-name-backup-s3",
        "region": "us-west-2"
      },
      "type": "s3"
    }
  }
},
"pmm": {
  "enabled": false,
  "image": "percona/percona-xtradb-cluster-operator:1.5.0-pmm",
  "serverHost": "monitoring-service",
  "serverUser": "pmm"
},
"proxysql": {
  "affinity": {
    "antiAffinityTopologyKey": "none"
  },
  "enabled": true,
  "gracePeriod": 30,
  "image": "percona/percona-xtradb-cluster-operator:1.5.0-proxysql",
  "podDisruptionBudget": {
    "maxUnavailable": 1
  },
  "resources": {
    "requests": null
  },
  "size": 3,
  "volumeSpec": {
    "persistentVolumeClaim": {
      "resources": {
        "requests": {
          "storage": "2Gi"
        }
      }
    }
  }
},
"pxc": {
  "affinity": {
    "antiAffinityTopologyKey": "none"
  },

```

```

    "gracePeriod":600,
    "image":"percona/percona-xtradb-cluster:8.0.19-10.1",
    "podDisruptionBudget":{"maxUnavailable":1},
    },
    "resources":{"requests":null},
    },
    "size":3,
    "volumeSpec":{"persistentVolumeClaim":{"resources":{"requests":{"storage":"6Gi"}}}},
    },
    },
    "secretsName":"my-cluster-secrets",
    "sslInternalSecretName":"my-cluster-ssl-internal",
    "sslSecretName":"my-cluster-ssl",
    "vaultSecretName":"keyring-secret-vault"
  }
}

```

## List Percona XtraDB Clusters

### Description:

Lists all Percona XtraDB Clusters that exist in your kubernetes cluster

### Kubectl Command:

```
$ kubectl get pxc
```

### URL:

[https://\\$API\\_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters?limit=500](https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters?limit=500)

### Authentication:

Authorization: Bearer \$KUBE\_TOKEN

### cURL Request:

```
$ curl -k -v -XGET "https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters?limit=500" \
-H "Accept: application/json;as=Table;v=v1;g=meta.k8s.io,application/json;as=Table;v=v1beta1;g=meta.k8s.io,application/json" \
-H "Authorization: Bearer $KUBE_TOKEN"
```

### Request Body:

None

### Response:





```

{
  "kind": "Table",
  "apiVersion": "meta.k8s.io/v1",
  "metadata": {
    "selfLink": "/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters",
    "resourceVersion": "10528"
  },
  "columnDefinitions": [
    {
      "name": "Name",
      "type": "string",
      "format": "name",
      "description": "Name must be unique within a namespace. Is required when creating resources, although some resources may allow a client to request the generation of an appropriate name automatically. Name is primarily intended for creation idempotence and configuration definition. Cannot be updated. More info: http://kubernetes.io/docs/user-guide/identifiers#names",
      "priority": 0
    },
    {
      "name": "Endpoint",
      "type": "string",
      "format": "",
      "description": "Custom resource definition column (in JSONPath format): .status.host",
      "priority": 0
    },
    {
      "name": "Status",
      "type": "string",
      "format": "",
      "description": "Custom resource definition column (in JSONPath format): .status.state",
      "priority": 0
    },
    {
      "name": "PXC",
      "type": "string",
      "format": "",
      "description": "Ready pxc nodes",
      "priority": 0
    },
    {
      "name": "proxysql",
      "type": "string",
      "format": "",
      "description": "Ready pxc nodes",
      "priority": 0
    },
    {
      "name": "Age",
      "type": "date",
      "format": "",
      "description": "Custom resource definition column (in JSONPath format): .metadata.creationTimestamp",
      "priority": 0
    }
  ],
  "rows": [
    {
      "cells": [
        "cluster1",
        "cluster1-proxysql.default",
        "ready",
        "3",
        "3",
        "8m37s"
      ],
      "object": {
        "kind": "PartialObjectMetadata",
        "apiVersion": "meta.k8s.io/v1",
        "metadata": {
          "name": "cluster1",
          "namespace": "default",
          "selfLink": "/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1",
          "uid": "e9115e2a-49df-4ebf-9dab-fa5a550208d3",
          "resourceVersion": "10517",
          "generation": 1,
          "creationTimestamp": "2020-05-27T22:23:58Z",
          "finalizers": [
            "delete-pxc-pods-in-order"
          ],
          "managedFields": [
            {
              "manager": "kubect1",
              "operation": "Update",
              "apiVersion": "pxc.percona.com/v1-5-0",
              "time": "2020-05-27T22:23:58Z",
              "fieldsType": "FieldsV1",
              "fieldsV1": {
                "f:metadata": {

```

```

    "f:finalizers":{
    }
  },
  "f:spec":{
    ".":{

    },
    "f:allowUnsafeConfigurations":{

    },
    "f:backup":{
      ".":{

      },
      "f:image":{

      },
      "f:schedule":{

      },
      "f:serviceAccountName":{

      },
      "f:storages":{
        ".":{

        },
        "f:fs-pvc":{
          ".":{

          },
          "f:type":{

          },
          "f:volume":{
            ".":{

            },
            "f:persistentVolumeClaim":{
              ".":{

              },
              "f:accessModes":{

              },
              "f:resources":{
                ".":{

                },
                "f:requests":{
                  ".":{

                  },
                  "f:storage":{

                  }
                }
              }
            }
          }
        },
        "f:s3-us-west":{
          ".":{

          },
          "f:s3":{
            ".":{

            },
            "f:bucket":{

            },
            "f:credentialsSecret":{

            },
            "f:region":{

            }
          },
          "f:type":{

          }
        }
      }
    },
    "f:pmm":{

```

```

      ".":{
      },
      "f:image":{
      },
      "f:serverHost":{
      },
      "f:serverUser":{
      }
    },
    "f:proxysql":{
      ".":{
      },
      "f:affinity":{
        ".":{
        },
        "f:antiAffinityTopologyKey":{
        }
      },
      "f:enabled":{
      },
      "f:gracePeriod":{
      },
      "f:image":{
      },
      "f:podDisruptionBudget":{
        ".":{
        },
        "f:maxUnavailable":{
        }
      },
      "f:resources":{
      },
      "f:size":{
      },
      "f:volumeSpec":{
        ".":{
        },
        "f:persistentVolumeClaim":{
          ".":{
          },
          "f:resources":{
            ".":{
            },
            "f:requests":{
              ".":{
              },
              "f:storage":{
              }
            }
          }
        }
      },
      "f:pxc":{
        ".":{
        },
        "f:affinity":{
          ".":{
          },
          "f:antiAffinityTopologyKey":{
          }
        },
        "f:gracePeriod":{
        },
      },
    },
  },

```

```

    "f:image":{
    },
    "f:podDisruptionBudget":{
      ".":{
      },
      "f:maxUnavailable":{
      }
    },
    "f:resources":{
    },
    "f:size":{
    },
    "f:volumeSpec":{
      ".":{
      },
      "f:persistentVolumeClaim":{
        ".":{
        },
        "f:resources":{
          ".":{
          },
          "f:requests":{
            ".":{
            },
            "f:storage":{
            }
          }
        }
      }
    },
    "f:secretsName":{
    },
    "f:sslInternalSecretName":{
    },
    "f:sslSecretName":{
    },
    "f:vaultSecretName":{
    }
  }
},
{
  "manager":"percona-xtradb-cluster-operator",
  "operation":"Update",
  "apiVersion":"pxc.percona.com/v1",
  "time":"2020-05-27T22:32:31Z",
  "fieldsType":"FieldsV1",
  "fieldsV1":{
    "f:spec":{
      "f:backup":{
        "f:storages":{
          "f:fs-pvc":{
            "f:podSecurityContext":{
              ".":{
              },
              "f:fsGroup":{
              },
              "f:supplementalGroups":{
              }
            },
            "f:s3":{
              ".":{
              },
              "f:bucket":{
              },
              "f:credentialsSecret":{

```

```

    }
  },
  "f:s3-us-west":{
    "f:podSecurityContext":{
      ".":{

      },
      "f:fsGroup":{

      },
      "f:supplementalGroups":{

      }
    }
  },
  "f:pmm":{
    "f:resources":{

    }
  },
  "f:proxysql":{
    "f:podSecurityContext":{
      ".":{

      },
      "f:fsGroup":{

      },
      "f:supplementalGroups":{

      }
    }
  },
  "f:sslInternalSecretName":{

  },
  "f:sslSecretName":{

  },
  "f:volumeSpec":{
    "f:persistentVolumeClaim":{
      "f:accessModes":{

      }
    }
  }
},
"f:pxc":{
  "f:podSecurityContext":{
    ".":{

    },
    "f:fsGroup":{

    },
    "f:supplementalGroups":{

    }
  },
  "f:sslInternalSecretName":{

  },
  "f:sslSecretName":{

  },
  "f:vaultSecretName":{

  },
  "f:volumeSpec":{
    "f:persistentVolumeClaim":{
      "f:accessModes":{

      }
    }
  }
},
"f:status":{
  ".":{

  },
  "f:conditions":{

  },
  "f:host":{

```



Response:





```

{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBCluster",
  "metadata": {
    "annotations": {
      "kubect1.kubernetes.io/last-applied-configuration": "
{\\\"apiVersion\\\": \\\"pxc.percona.com/v1\\\", \\\"kind\\\": \\\"PerconaXtraDBCluster\\\", \\\"metadata\\\": {\\\"annotations\\\": {}, \\\"creationTimestamp\\\": \\\"2020-05-27T22:23:58Z\\\", \\\"finalizers\\\": [\\\"delete-pxc-pods-in-order\\\"], \\\"generation\\\": 1, \\\"managedFields\\\": {\\\"apiVersion\\\": \\\"pxc.percona.com/v1-5-0\\\", \\\"fieldsType\\\": \\\"FieldsV1\\\", \\\"fieldsV1\\\": {\\\"f:metadata\\\": {\\\"f:finalizers\\\": {}}, \\\"f:spec\\\": {\\\".\\\": {\\\"f:allowUnsafeConfigurations\\\": {}, \\\"f:backup\\\": {\\\".\\\": {\\\"f:image\\\": {}, \\\"f:schedule\\\": {}, \\\"f:serviceAccountName\\\": {}, \\\"f:storages\\\": {\\\".\\\": {\\\"f:fs-pvc\\\": {\\\".\\\": {\\\"f:type\\\": {}, \\\"f:volume\\\": {\\\".\\\": {\\\"f:persistentVolumeClaim\\\": {\\\".\\\": {\\\"f:accessModes\\\": {}, \\\"f:resources\\\": {\\\".\\\": {\\\"f:requests\\\": {\\\".\\\": {\\\"f:storage\\\": {}}}}}}, \\\"f:s3-us-west\\\": {\\\".\\\": {\\\"f:s3\\\": {\\\".\\\": {\\\"f:bucket\\\": {}, \\\"f:credentialsSecret\\\": {}, \\\"f:region\\\": {}}, \\\"f:type\\\": {}}}}, \\\"f:pmm\\\": {\\\".\\\": {\\\"f:image\\\": {}, \\\"f:serverHost\\\": {}, \\\"f:serverUser\\\": {}}, \\\"f:proxysql\\\": {\\\".\\\": {\\\"f:affinity\\\": {\\\".\\\": {\\\"f:antiAffinityTopologyKey\\\": {}, \\\"f:gracePeriod\\\": {}, \\\"f:image\\\": {}, \\\"f:podDisruptionBudget\\\": {\\\".\\\": {\\\"f:resources\\\": {}, \\\"f:size\\\": {\\\".\\\": {\\\"f:storage\\\": {}}}}}}, \\\"f:resources\\\": {\\\".\\\": {\\\"f:requests\\\": {\\\".\\\": {\\\"f:storage\\\": {}}}}}}, \\\"f:pxc\\\": {\\\".\\\": {\\\"f:affinity\\\": {\\\".\\\": {\\\"f:antiAffinityTopologyKey\\\": {}, \\\"f:gracePeriod\\\": {}, \\\"f:image\\\": {}, \\\"f:podDisruptionBudget\\\": {\\\".\\\": {\\\"f:resources\\\": {}, \\\"f:size\\\": {\\\".\\\": {\\\"f:storage\\\": {}}}}}}, \\\"f:resources\\\": {\\\".\\\": {\\\"f:requests\\\": {\\\".\\\": {\\\"f:storage\\\": {}}}}}}, \\\"f:secretName\\\": {}, \\\"f:sslInternalSecretName\\\": {\\\"f:sslSecretName\\\": {}, \\\"f:vaultSecretName\\\": {}}, \\\"manager\\\": \\\"kubect1\\\", \\\"operation\\\": \\\"Update\\\", \\\"time\\\": \\\"2020-05-27T22:23:58Z\\\"}, \\\"apiVersion\\\": \\\"pxc.percona.com/v1\\\", \\\"fieldsType\\\": \\\"FieldsV1\\\", \\\"fieldsV1\\\": {\\\"f:spec\\\": {\\\"f:backup\\\": {\\\"f:storages\\\": {\\\"f:fs-pvc\\\": {\\\"f:podSecurityContext\\\": {\\\".\\\": {\\\"f:fsGroup\\\": {}, \\\"f:supplementalGroups\\\": {}}, \\\"f:s3\\\": {\\\".\\\": {\\\"f:bucket\\\": {}, \\\"f:credentialsSecret\\\": {}, \\\"f:region\\\": {}, \\\"f:type\\\": {}}, \\\"f:s3-us-west\\\": {\\\"f:podSecurityContext\\\": {\\\".\\\": {\\\"f:fsGroup\\\": {}, \\\"f:supplementalGroups\\\": {}}, \\\"f:pmm\\\": {\\\"f:resources\\\": {\\\".\\\": {\\\"f:proxysql\\\": {\\\"f:podSecurityContext\\\": {\\\".\\\": {\\\"f:fsGroup\\\": {}, \\\"f:supplementalGroups\\\": {}}, \\\"f:sslInternalSecretName\\\": {\\\"f:sslSecretName\\\": {}, \\\"f:volumeSpec\\\": {\\\"f:persistentVolumeClaim\\\": {\\\"f:accessModes\\\": {}}, \\\"f:pxc\\\": {\\\"f:podSecurityContext\\\": {\\\".\\\": {\\\"f:fsGroup\\\": {}, \\\"f:supplementalGroups\\\": {}}, \\\"f:sslInternalSecretName\\\": {\\\"f:sslSecretName\\\": {}, \\\"f:vaultSecretName\\\": {\\\"f:volumeSpec\\\": {\\\"f:persistentVolumeClaim\\\": {\\\"f:accessModes\\\": {}}, \\\"f:status\\\": {\\\".\\\": {\\\"f:conditions\\\": {}, \\\"f:host\\\": {\\\".\\\": {\\\"f:observedGeneration\\\": {}, \\\"f:proxysql\\\": {\\\".\\\": {\\\"f:ready\\\": {}, \\\"f:size\\\": {}, \\\"f:status\\\": {}}, \\\"f:pxc\\\": {\\\".\\\": {\\\"f:ready\\\": {\\\".\\\": {\\\"f:size\\\": {}, \\\"f:status\\\": {}}, \\\"f:state\\\": {}}, \\\"manager\\\": \\\"percona-xtradb-cluster-operator\\\", \\\"operation\\\": \\\"Update\\\", \\\"time\\\": \\\"2020-05-27T23:06:47Z\\\"}}, \\\"name\\\": \\\"cluster1\\\", \\\"namespace\\\": \\\"default\\\", \\\"resourceVersion\\\": \\\"15878\\\", \\\"selfLink\\\": \\\"/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1\\\", \\\"uid\\\": \\\"e9115e2a-49df-4ebf-9dab-fa5a550208d3\\\"}, \\\"spec\\\": {\\\"allowUnsafeConfigurations\\\": true, \\\"backup\\\": {\\\"image\\\": \\\"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-debug-backup\\\", \\\"schedule\\\": [\\\"keep\\\": 3, \\\"name\\\": \\\"sat-night-backup\\\", \\\"schedule\\\": \\\"0 * * 6\\\", \\\"storageName\\\": \\\"s3-us-west\\\", \\\"keep\\\": 5, \\\"name\\\": \\\"daily-backup\\\", \\\"schedule\\\": \\\"0 * * * * *\\\", \\\"storageName\\\": \\\"fs-pvc\\\"}], \\\"serviceAccountName\\\": \\\"percona-xtradb-cluster-operator\\\", \\\"storages\\\": {\\\"f:fs-pvc\\\": {\\\"type\\\": \\\"filesystem\\\", \\\"volume\\\": {\\\"persistentVolumeClaim\\\": {\\\"accessModes\\\": [\\\"ReadWriteOnce\\\"], \\\"resources\\\": {\\\"requests\\\": {\\\"storage\\\": \\\"6Gi\\\"}}}}, \\\"s3-us-west\\\": {\\\"s3\\\": {\\\"bucket\\\": \\\"S3-BACKUP-BUCKET-NAME-HERE\\\", \\\"credentialsSecret\\\": \\\"my-cluster-name-backup-s3\\\", \\\"region\\\": \\\"us-west-2\\\", \\\"type\\\": \\\"s3\\\"}}, \\\"pmm\\\": {\\\"enabled\\\": false, \\\"image\\\": \\\"percona/percona-xtradb-cluster-operator:1.5.0-pmm\\\", \\\"serverHost\\\": \\\"monitoring-service\\\", \\\"serverUser\\\": \\\"pmm\\\", \\\"proxysql\\\": {\\\"affinity\\\": {\\\"antiAffinityTopologyKey\\\": \\\"none\\\", \\\"enabled\\\": true, \\\"gracePeriod\\\": 30, \\\"image\\\": \\\"percona/percona-xtradb-cluster-operator:1.5.0-proxysql\\\", \\\"podDisruptionBudget\\\": {\\\"maxUnavailable\\\": 1, \\\"resources\\\": {\\\"requests\\\": null}, \\\"size\\\": 5, \\\"volumeSpec\\\": {\\\"persistentVolumeClaim\\\": {\\\"resources\\\": {\\\"requests\\\": {\\\"storage\\\": \\\"2Gi\\\"}}}, \\\"pxc\\\": {\\\"affinity\\\": {\\\"antiAffinityTopologyKey\\\": \\\"none\\\", \\\"gracePeriod\\\": 600, \\\"image\\\": \\\"percona/percona-xtradb-cluster:8.0.19-10.1\\\", \\\"podDisruptionBudget\\\": {\\\"maxUnavailable\\\": 1, \\\"resources\\\": {\\\"requests\\\": null}, \\\"size\\\": 5, \\\"volumeSpec\\\": {\\\"persistentVolumeClaim\\\": {\\\"resources\\\": {\\\"requests\\\": {\\\"storage\\\": \\\"6Gi\\\"}}}}, \\\"secretsName\\\": \\\"my-cluster-secrets\\\", \\\"sslInternalSecretName\\\": \\\"my-cluster-ssl-internal\\\", \\\"sslSecretName\\\": \\\"my-cluster-ssl\\\", \\\"vaultSecretName\\\": \\\"keyring-secret-vault\\\", \\\"status\\\": {\\\"conditions\\\": [{\\\"lastTransitionTime\\\": \\\"2020-05-27T22:23:58Z\\\", \\\"status\\\": \\\"True\\\", \\\"type\\\": \\\"Initializing\\\"}, {\\\"lastTransitionTime\\\": \\\"2020-05-27T22:25:43Z\\\", \\\"status\\\": \\\"True\\\", \\\"type\\\": \\\"Ready\\\"}], \\\"host\\\": \\\"cluster1-proxysql.default\\\", \\\"observedGeneration\\\": 1, \\\"proxysql\\\": {\\\"ready\\\": 3, \\\"size\\\": 5, \\\"status\\\": \\\"ready\\\"}, \\\"pxc\\\": {\\\"ready\\\": 3, \\\"size\\\": 5, \\\"status\\\": \\\"ready\\\"}, \\\"state\\\": \\\"ready\\\"}}\\\"n\"
      }
    },
    "creationTimestamp": "2020-05-27T22:23:58Z",
    "finalizers": [
      "delete-pxc-pods-in-order"
    ],
    "generation": 6,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1-5-0",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:metadata": {
            "f:finalizers": {
            }
          },
          "f:spec": {
            ".": {
            },
            "f:allowUnsafeConfigurations": {
            },
            "f:backup": {
              ".": {
              },
              "f:schedule": {
              },
            },
            "f:serviceAccountName": {
            },
            "f:storages": {
              ".": {
              }
            }
          }
        }
      }
    ]
  }
}

```

```

    "f:fs-pvc":{
      ".":{
        },
        "f:type":{
          },
          "f:volume":{
            ".":{
              },
              "f:persistentVolumeClaim":{
                ".":{
                  },
                  "f:accessModes":{
                    },
                    "f:resources":{
                      ".":{
                        },
                        "f:requests":{
                          ".":{
                            },
                            "f:storage":{
                              }
                            }
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          },
          "f:s3-us-west":{
            ".":{
              },
              "f:s3":{
                ".":{
                  },
                  "f:bucket":{
                    },
                    "f:credentialsSecret":{
                      },
                      "f:region":{
                        }
                      }
                    },
                    "f:type":{
                      }
                    }
                  }
                }
              }
            },
            "f:pmm":{
              ".":{
                },
                "f:image":{
                  },
                  "f:serverHost":{
                    },
                    "f:serverUser":{
                      }
                    }
                  },
                  "f:proxysql":{
                    ".":{
                      },
                      "f:affinity":{
                        ".":{
                          },
                          "f:antiAffinityTopologyKey":{
                            }
                          }
                        },
                        "f:enabled":{
                          }
                        }
                      },
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    "f:gracePeriod":{
    },
    "f:image":{
    },
    "f:podDisruptionBudget":{
      ".":{
      },
      "f:maxUnavailable":{
      }
    }
  },
  "f:resources":{
  },
  "f:volumeSpec":{
    ".":{
    },
    "f:persistentVolumeClaim":{
      ".":{
      },
      "f:resources":{
        ".":{
        },
        "f:requests":{
          ".":{
          },
          "f:storage":{
          }
        }
      }
    }
  }
},
"f:pxc":{
  ".":{
  },
  "f:affinity":{
    ".":{
    },
    "f:antiAffinityTopologyKey":{
    }
  },
  "f:gracePeriod":{
  },
  "f:podDisruptionBudget":{
    ".":{
    },
    "f:maxUnavailable":{
    }
  },
  "f:resources":{
  },
  "f:volumeSpec":{
    ".":{
    },
    "f:persistentVolumeClaim":{
      ".":{
      },
      "f:resources":{
        ".":{
        },
        "f:requests":{
          ".":{
          },
          "f:storage":{
          }
        }
      }
    }
  }
}

```

```

    }
  }
},
"f:secretsName":{
  },
"f:sslInternalSecretName":{
  },
"f:sslSecretName":{
  },
"f:vaultSecretName":{
  }
}
},
"manager":"kubect1",
"operation":"Update",
"time":"2020-05-27T22:23:58Z"
},
{
"apiVersion":"pxc.percona.com/v1",
"fieldsType":"FieldsV1",
"fieldsV1":{
"f:metadata":{
"f:annotations":{
".":{
  },
"f:kubect1.kubernetes.io/last-applied-configuration":{
  }
}
},
"f:spec":{
"f:backup":{
"f:image":{
  }
},
"f:proxysql":{
"f:size":{
  }
},
"f:pxc":{
"f:image":{
  },
"f:size":{
  }
}
}
},
"manager":"kubect1",
"operation":"Update",
"time":"2020-05-27T23:38:49Z"
},
{
"apiVersion":"pxc.percona.com/v1",
"fieldsType":"FieldsV1",
"fieldsV1":{
"f:spec":{
"f:backup":{
"f:storages":{
"f:fs-pvc":{
"f:podSecurityContext":{
".":{
  },
"f:fsGroup":{
  },
"f:supplementalGroups":{
  }
},
"f:s3":{
".":{
  },
"f:bucket":{
  },

```

```

        "f:credentialsSecret":{
            }
        },
        "f:s3-us-west":{
            "f:podSecurityContext":{
                ".":{
                    },
                    "f:fsGroup":{
                        },
                        "f:supplementalGroups":{
                            }
                        }
                    }
                }
            },
            "f:pmm":{
                "f:resources":{
                    }
                },
                "f:proxysql":{
                    "f:podSecurityContext":{
                        ".":{
                            },
                            "f:fsGroup":{
                                },
                                "f:supplementalGroups":{
                                    }
                                }
                            },
                            "f:sslInternalSecretName":{
                                },
                                "f:sslSecretName":{
                                    },
                                    "f:volumeSpec":{
                                        "f:persistentVolumeClaim":{
                                            "f:accessModes":{
                                                }
                                            }
                                        }
                                    }
                                },
                                "f:pxc":{
                                    "f:podSecurityContext":{
                                        ".":{
                                            },
                                            "f:fsGroup":{
                                                },
                                                "f:supplementalGroups":{
                                                    }
                                                }
                                            },
                                            "f:sslInternalSecretName":{
                                                },
                                                "f:sslSecretName":{
                                                    },
                                                    "f:vaultSecretName":{
                                                        },
                                                        "f:volumeSpec":{
                                                            "f:persistentVolumeClaim":{
                                                                "f:accessModes":{
                                                                    }
                                                                }
                                                            }
                                                        }
                                                    }
                                                },
                                                "f:status":{
                                                    ".":{
                                                        },
                                                        "f:conditions":{

```

```

    },
    "f:host":{
    },
    "f:message":{
    },
    "f:observedGeneration":{
    },
    "f:proxysql":{
      ".":{
    },
    "f:ready":{
    },
    "f:size":{
    },
    "f:status":{
    }
  },
  "f:pxc":{
    ".":{
    },
    "f:message":{
    },
    "f:ready":{
    },
    "f:size":{
    },
    "f:status":{
    }
  },
  "f:state":{
    }
  }
},
"manager":"percona-xtradb-cluster-operator",
"operation":"Update",
"time":"2020-05-28T10:42:00Z"
}
],
"name":"cluster1",
"namespace":"default",
"resourceVersion":"35660",
"selfLink":"/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1",
"uid":"e9115e2a-49df-4ebf-9dab-fa5a550208d3"
},
"spec":{
"allowUnsafeConfigurations":true,
"backup":{
"image":"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-debug-backup",
"schedule":[
{
"keep":3,
"name":"sat-night-backup",
"schedule":"0 0 * * 6",
"storageName":"s3-us-west"
},
{
"keep":5,
"name":"daily-backup",
"schedule":"0 0 * * *",
"storageName":"fs-pvc"
}
]
},
"serviceAccountName":"percona-xtradb-cluster-operator",
"storages":{
"fs-pvc":{
"type":"filesystem",
"volume":{
"persistentVolumeClaim":{
"accessModes":[
"ReadWriteOnce"
],
"resources":{
"requests":{
"storage":"6Gi"
}
}
}
}
}
}
}
}

```

```

    }
  }
}
},
"s3-us-west":{
  "s3":{
    "bucket":"S3-BACKUP-BUCKET-NAME-HERE",
    "credentialsSecret":"my-cluster-name-backup-s3",
    "region":"us-west-2"
  },
  "type":"s3"
}
},
"pmm":{
  "enabled":false,
  "image":"percona/percona-xtradb-cluster-operator:1.5.0-pmm",
  "serverHost":"monitoring-service",
  "serverUser":"pmm"
},
"proxysql":{
  "affinity":{
    "antiAffinityTopologyKey":"none"
  },
  "enabled":true,
  "gracePeriod":30,
  "image":"percona/percona-xtradb-cluster-operator:1.5.0-proxysql",
  "podDisruptionBudget":{
    "maxUnavailable":1
  },
  "resources":{

  },
  "size":3,
  "volumeSpec":{
    "persistentVolumeClaim":{
      "resources":{
        "requests":{
          "storage":"2Gi"
        }
      }
    }
  }
},
"pxc":{
  "affinity":{
    "antiAffinityTopologyKey":"none"
  },
  "gracePeriod":600,
  "image":"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-debug",
  "podDisruptionBudget":{
    "maxUnavailable":1
  },
  "resources":{

  },
  "size":3,
  "volumeSpec":{
    "persistentVolumeClaim":{
      "resources":{
        "requests":{
          "storage":"6Gi"
        }
      }
    }
  }
},
"secretsName":"my-cluster-secrets",
"sslInternalSecretName":"my-cluster-ssl-internal",
"sslSecretName":"my-cluster-ssl",
"vaultSecretName":"keyring-secret-vault"
},
"status":{
  "conditions":[
    {
      "lastTransitionTime":"2020-05-27T22:25:43Z",
      "status":"True",
      "type":"Ready"
    },
    {
      "lastTransitionTime":"2020-05-27T23:06:48Z",
      "status":"True",
      "type":"Initializing"
    },
    {
      "lastTransitionTime":"2020-05-27T23:08:58Z",

```

```

    "message": "ProxySQL upgrade error: context deadline exceeded",
    "reason": "ErrorReconcile",
    "status": "True",
    "type": "Error"
  },
  {
    "lastTransitionTime": "2020-05-27T23:08:59Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-27T23:29:59Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-27T23:30:04Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-27T23:35:27Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-27T23:35:42Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-27T23:47:00Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-27T23:47:05Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-28T09:58:25Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-28T09:58:31Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-28T10:03:54Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-28T10:04:14Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-28T10:15:28Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-28T10:15:38Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-28T10:26:56Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-28T10:27:01Z",
    "status": "True",
    "type": "Initializing"
  },
  {
    "lastTransitionTime": "2020-05-28T10:38:28Z",
    "status": "True",
    "type": "Ready"
  },
  {
    "lastTransitionTime": "2020-05-28T10:38:33Z",

```



```

        "status":"True",
        "type":"Initializing"
    }
],
"host":"cluster1-proxysql.default",
"message":[
    "PXC: pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-1_default(5b9b16e6-d0f8-4c97-a2d0-294feb9d014b); pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-2_default(b8ebedd7-42f0-440b-aa5e-509d28926a5e); pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-4_default(2dce12f2-9ebc-419c-a92a-9cec68912004); ",
],
"observedGeneration":6,
"proxysql":{
    "ready":3,
    "size":3,
    "status":"ready"
},
"pxc":{
    "message":"pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-1_default(5b9b16e6-d0f8-4c97-a2d0-294feb9d014b); pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-2_default(b8ebedd7-42f0-440b-aa5e-509d28926a5e); pxc: back-off 5m0s restarting failed container=pxc pod=cluster1-pxc-4_default(2dce12f2-9ebc-419c-a92a-9cec68912004); ",
    "ready":2,
    "size":3,
    "status":"initializing"
},
"state":"initializing"
}
}
}

```

## Scale up/down Percona XtraDB Cluster

### Description:

Increase or decrease the size of the Percona XtraDB Cluster nodes to fit the current high availability needs

### Kubectl Command:

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
"spec": {"pxc":{"size": "5" }
}}'
```

### URL:

[https://\\$API\\_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1](https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1)

### Authentication:

Authorization: Bearer \$KUBE\_TOKEN

### cURL Request:

```
$ curl -k -v -XPATCH "https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1" \
-H "Authorization: Bearer $KUBE_TOKEN" \
-H "Content-Type: application/merge-patch+json" \
-H "Accept: application/json" \
-d '{
    "spec": {"pxc":{"size": "5" }
    }
}'
```

### Request Body:

#### Example

```
{
"spec": {"pxc":{"size": "5" }
}}
```

### Input:

**spec:**

pxc

1. size (Int or String, Defaults: 3): Specify the size of the Percona XtraDB Cluster to scale up or down to

**Response:**



```

{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBCluster",
  "metadata": {
    "annotations": {
      "kubect1.kubernetes.io/last-applied-configuration": "{\"apiVersion\": \"pxc.percona.com/v1-5-0\", \"kind\": \"PerconaXtraDBCluster\", \"metadata\": {\"annotations\": {}, \"finalizers\": [\"delete-pxc-pods-in-order\"], \"name\": \"cluster1\", \"namespace\": \"default\"}, \"spec\": {\"allowUnsafeConfigurations\": true, \"backup\": {\"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup\", \"schedule\": [{\"keep\": 3, \"name\": \"sat-night-backup\", \"schedule\": \"0 * * * 6\", \"storageName\": \"s3-us-west\"}, {\"keep\": 5, \"name\": \"daily-backup\", \"schedule\": \"0 0 * * *\", \"storageName\": \"fs-pvc\"}], \"serviceAccountName\": \"percona-xtradb-cluster-operator\", \"storages\": {\"fs-pvc\": {\"type\": \"filesystem\", \"volume\": {\"persistentVolumeClaim\": {\"accessModes\": [\"ReadWriteOnce\"], \"resources\": {\"requests\": {\"storage\": \"6Gi\"}}}}, \"s3-us-west\": {\"s3\": {\"bucket\": \"S3-BACKUP-BUCKET-NAME-HERE\", \"credentialsSecret\": \"my-cluster-name-backup-s3\", \"region\": \"us-west-2\"}, \"type\": \"s3\"}}, \"pmm\": {\"enabled\": false, \"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-pmm\", \"serverHost\": \"monitoring-service\", \"serverUser\": \"pmm\", \"proxysql\": {\"affinity\": {\"antiAffinityTopologyKey\": \"none\"}, \"enabled\": true, \"gracePeriod\": 30, \"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-proxysql\", \"podDisruptionBudget\": {\"maxUnavailable\": 1}, \"resources\": {\"requests\": null, \"size\": 3, \"volumeSpec\": {\"persistentVolumeClaim\": {\"resources\": {\"requests\": {\"storage\": \"2Gi\"}}}}, \"pxc\": {\"affinity\": {\"antiAffinityTopologyKey\": \"none\"}, \"gracePeriod\": 600, \"image\": \"percona/percona-xtradb-cluster:8.0.19-10.1\", \"podDisruptionBudget\": {\"maxUnavailable\": 1}, \"resources\": {\"requests\": null, \"size\": 3, \"volumeSpec\": {\"persistentVolumeClaim\": {\"resources\": {\"requests\": {\"storage\": \"6Gi\"}}}}, \"secretsName\": \"my-cluster-secrets\", \"sslInternalSecretName\": \"my-cluster-ssl-internal\", \"sslSecretName\": \"my-cluster-ssl\", \"updateStrategy\": \"RollingUpdate\", \"vaultSecretName\": \"keyring-secret-vault\"}}}\n"}
    },
    "creationTimestamp": "2020-06-01T16:50:05Z",
    "finalizers": [
      "delete-pxc-pods-in-order"
    ],
    "generation": 4,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1-5-0",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:metadata": {
            "f:annotations": {
              ".": {
                "kubect1.kubernetes.io/last-applied-configuration": {
                }
              }
            },
            "f:finalizers": {
            }
          }
        },
        "spec": {
          ".": {
            "allowUnsafeConfigurations": {
            },
            "backup": {
              ".": {
                "image": {
                },
                "schedule": {
                },
                "serviceAccountName": {
                },
                "storages": {
                  ".": {
                    "fs-pvc": {
                      ".": {
                        "type": {
                        },
                        "volume": {
                          ".": {
                            "persistentVolumeClaim": {
                              ".": {
                                "accessModes": {
                                }
                              }
                            }
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    ]
  }
}

```

```

        },
        "f:resources":{
            ".":{

            },
            "f:requests":{
                ".":{

                },
                "f:storage":{

                }
            }
        }
    },
    "f:s3-us-west":{
        ".":{

        },
        "f:s3":{
            ".":{

            },
            "f:bucket":{

            },
            "f:credentialsSecret":{

            },
            "f:region":{

            }
        },
        "f:type":{

        }
    }
},
"f:pnm":{
    ".":{

    },
    "f:image":{

    },
    "f:serverHost":{

    },
    "f:serverUser":{

    }
},
"f:proxysql":{
    ".":{

    },
    "f:affinity":{
        ".":{

        },
        "f:antiAffinityTopologyKey":{

        }
    },
    "f:enabled":{

    },
    "f:gracePeriod":{

    },
    "f:image":{

    },
    "f:podDisruptionBudget":{
        ".":{

        },
        "f:maxUnavailable":{

        }
    }
},
"f:resources":{

```

```

    },
    "f:size":{
    },
    "f:volumeSpec":{
      ".":{
      },
      "f:persistentVolumeClaim":{
        ".":{
        },
        "f:resources":{
          ".":{
          },
          "f:requests":{
            ".":{
            },
            "f:storage":{
            }
          }
        }
      }
    },
    "f:pxc":{
      ".":{
      },
      "f:affinity":{
        ".":{
        },
        "f:antiAffinityTopologyKey":{
        }
      }
    },
    "f:gracePeriod":{
    },
    "f:podDisruptionBudget":{
      ".":{
      },
      "f:maxUnavailable":{
      }
    },
    "f:resources":{
    },
    "f:volumeSpec":{
      ".":{
      },
      "f:persistentVolumeClaim":{
        ".":{
        },
        "f:resources":{
          ".":{
          },
          "f:requests":{
            ".":{
            },
            "f:storage":{
            }
          }
        }
      }
    },
    "f:secretsName":{
    },
    "f:sslInternalSecretName":{
    },
    "f:sslSecretName":{
    },
  },

```

```

    "f:updateStrategy":{
      },
      "f:vaultSecretName":{
        }
      }
    },
    "manager":"kubect1",
    "operation":"Update",
    "time":"2020-06-01T16:52:30Z"
  },
  {
    "apiVersion":"pxc.percona.com/v1",
    "fieldsType":"FieldsV1",
    "fieldsV1":{
      "f:spec":{
        "f:backup":{
          "f:storages":{
            "f:fs-pvc":{
              "f:podSecurityContext":{
                ".":{
                  },
                  "f:fsGroup":{
                    },
                    "f:supplementalGroups":{
                      }
                    },
                    "f:s3":{
                      ".":{
                        },
                        "f:bucket":{
                          },
                          "f:credentialsSecret":{
                            }
                          }
                        },
                        "f:s3-us-west":{
                          "f:podSecurityContext":{
                            ".":{
                              },
                              "f:fsGroup":{
                                },
                                "f:supplementalGroups":{
                                  }
                                }
                              }
                            }
                          }
                        },
                        "f:pmm":{
                          "f:resources":{
                            }
                          }
                        },
                        "f:proxysql":{
                          "f:podSecurityContext":{
                            ".":{
                              },
                              "f:fsGroup":{
                                },
                                "f:supplementalGroups":{
                                  }
                                }
                              }
                            }
                          },
                          "f:sslInternalSecretName":{
                            },
                            "f:sslSecretName":{
                              },
                              "f:volumeSpec":{
                                "f:persistentVolumeClaim":{
                                  "f:accessModes":{
                                    }
                                  }
                                }
                              }
                            }
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "f:pxc":{
      "f:podSecurityContext":{
        ".":{

          },
          "f:fsGroup":{

          },
          "f:supplementalGroups":{

          }
        },
        "f:sslInternalSecretName":{

        },
        "f:sslSecretName":{

        },
        "f:vaultSecretName":{

        },
        "f:volumeSpec":{
          "f:persistentVolumeClaim":{
            "f:accessModes":{

            }
          }
        }
      }
    },
    "f:status":{
      ".":{

      },
      "f:conditions":{

      },
      "f:host":{

      },
      "f:observedGeneration":{

      },
      "f:proxysql":{
        ".":{

        },
        "f:ready":{

        },
        "f:size":{

        },
        "f:status":{

        }
      },
      "f:pxc":{
        ".":{

        },
        "f:ready":{

        },
        "f:size":{

        },
        "f:status":{

        }
      },
      "f:state":{

      }
    }
  },
  "manager": "percona-xtradb-cluster-operator",
  "operation": "Update",
  "time": "2020-06-03T15:32:11Z"
},
{
  "apiVersion": "pxc.percona.com/v1",
  "fieldsType": "FieldsV1",
  "fieldsV1": {
    "f:spec": {

```



```

        "f:pxc":{
            "f:image":{
                },
            "f:size":{
                }
            }
        },
        "manager":"kubect1",
        "operation":"Update",
        "time":"2020-06-03T15:32:14Z"
    }
],
"name":"cluster1",
"namespace":"default",
"resourceVersion":"129605",
"selfLink":"/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1",
"uid":"15e5e7d6-10b2-46cf-85d0-d3fdea3412ca"
},
"spec":{
    "allowUnsafeConfigurations":true,
    "backup":{
        "image":"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup",
        "schedule":[
            {
                "keep":3,
                "name":"sat-night-backup",
                "schedule":"0 0 * * 6",
                "storageName":"s3-us-west"
            },
            {
                "keep":5,
                "name":"daily-backup",
                "schedule":"0 0 * * *",
                "storageName":"fs-pvc"
            }
        ],
        "serviceAccountName":"percona-xtradb-cluster-operator",
        "storages":{
            "fs-pvc":{
                "type":"filesystem",
                "volume":{
                    "persistentVolumeClaim":{
                        "accessModes":[
                            "ReadWriteOnce"
                        ],
                        "resources":{
                            "requests":{
                                "storage":"6Gi"
                            }
                        }
                    }
                }
            },
            "s3-us-west":{
                "s3":{
                    "bucket":"S3-BACKUP-BUCKET-NAME-HERE",
                    "credentialsSecret":"my-cluster-name-backup-s3",
                    "region":"us-west-2"
                },
                "type":"s3"
            }
        }
    },
    "pmm":{
        "enabled":false,
        "image":"percona/percona-xtradb-cluster-operator:1.5.0-pmm",
        "serverHost":"monitoring-service",
        "serverUser":"pmm"
    },
    "proxysql":{
        "affinity":{
            "antiAffinityTopologyKey":"none"
        },
        "enabled":true,
        "gracePeriod":30,
        "image":"percona/percona-xtradb-cluster-operator:1.5.0-proxysql",
        "podDisruptionBudget":{
            "maxUnavailable":1
        },
        "resources":{
            "requests":null
        },
        "size":3,
        "volumeSpec":{

```

```

    "persistentVolumeClaim":{
      "resources":{
        "requests":{
          "storage":"2Gi"
        }
      }
    }
  },
  "pxc":{
    "affinity":{
      "antiAffinityTopologyKey":"none"
    },
    "gracePeriod":600,
    "image":"percona/percona-xtradb-cluster:5.7.30-31.43",
    "podDisruptionBudget":{
      "maxUnavailable":1
    },
    "resources":{
      "requests":null
    },
    "size":"5",
    "volumeSpec":{
      "persistentVolumeClaim":{
        "resources":{
          "requests":{
            "storage":"6Gi"
          }
        }
      }
    }
  },
  "secretsName":"my-cluster-secrets",
  "sslInternalSecretName":"my-cluster-ssl-internal",
  "sslSecretName":"my-cluster-ssl",
  "updateStrategy":"RollingUpdate",
  "vaultSecretName":"keyring-secret-vault"
},
"status":{
  "conditions":[
    {
      "lastTransitionTime":"2020-06-01T16:50:37Z",
      "message":"create newStatefulSetNode: StatefulSet.apps \"cluster1-pxc\" is invalid: spec.updateStrategy: Invalid value: apps.StatefulSetUpdateStrategy{Type:\"SmartUpdate\", RollingUpdate:(*apps.RollingUpdateStatefulSetStrategy)(nil)}: must be 'RollingUpdate' or 'OnDelete'",
      "reason":"ErrorReconcile",
      "status":"True",
      "type":"Error"
    },
    {
      "lastTransitionTime":"2020-06-01T16:52:31Z",
      "status":"True",
      "type":"Initializing"
    },
    {
      "lastTransitionTime":"2020-06-01T16:55:59Z",
      "status":"True",
      "type":"Ready"
    },
    {
      "lastTransitionTime":"2020-06-01T17:19:15Z",
      "status":"True",
      "type":"Initializing"
    }
  ],
  "host":"cluster1-proxysql.default",
  "observedGeneration":3,
  "proxysql":{
    "ready":3,
    "size":3,
    "status":"ready"
  },
  "pxc":{
    "ready":1,
    "size":3,
    "status":"initializing"
  },
  "state":"initializing"
}
}

```

## Update Percona XtraDB Cluster image

**Description:**

Change the image of Percona XtraDB Cluster containers inside the cluster

**Kubectl Command:**

```
$ kubectl patch pxc cluster1 --type=merge --patch '{
"spec": {"pxc":{"image": "percona/percona-xtradb-cluster:5.7.30-31.43" }
}}'
```

**URL:**

https://\$API\_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1

**Authentication:**

Authorization: Bearer \$KUBE\_TOKEN

**cURL Request:**

```
$ curl -k -v -XPATCH "https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusters/cluster1" \
-H "Authorization: Bearer $KUBE_TOKEN" \
-H "Accept: application/json" \
-H "Content-Type: application/merge-patch+json"
-d '{
  "spec": {"pxc":{"image": "percona/percona-xtradb-cluster:5.7.30-31.43" }
}}'
```

**Request Body:****Example**

```
{
"spec": {"pxc":{"image": "percona/percona-xtradb-cluster:5.7.30-31.43" }
}}
```

**Input:**

spec:

pxc:

1. image (String, min-length: 1): name of the image to update for Percona XtraDB Cluster

**Response:**



```

{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBCluster",
  "metadata": {
    "annotations": {
      "kubect1.kubernetes.io/last-applied-configuration": "{\"apiVersion\": \"pxc.percona.com/v1-5-0\", \"kind\": \"PerconaXtraDBCluster\", \"metadata\": {\"annotations\": {}, \"finalizers\": [\"delete-pxc-pods-in-order\"], \"name\": \"cluster1\", \"namespace\": \"default\"}, \"spec\": {\"allowUnsafeConfigurations\": true, \"backup\": {\"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup\", \"schedule\": [{\"keep\": 3, \"name\": \"sat-night-backup\", \"schedule\": \"0 0 * * * 6\", \"storageName\": \"s3-us-west\"}, {\"keep\": 5, \"name\": \"daily-backup\", \"schedule\": \"0 0 * * *\", \"storageName\": \"fs-pvc\"}], \"serviceAccountName\": \"percona-xtradb-cluster-operator\", \"storages\": {\"fs-pvc\": {\"type\": \"filesystem\", \"volume\": {\"persistentVolumeClaim\": {\"accessModes\": [\"ReadWriteOnce\"], \"resources\": {\"requests\": {\"storage\": \"6Gi\"}}}}, \"s3-us-west\": {\"s3\": {\"bucket\": \"S3-BACKUP-BUCKET-NAME-HERE\", \"credentialsSecret\": \"my-cluster-name-backup-s3\", \"region\": \"us-west-2\"}, \"type\": \"s3\"}}, \"pmm\": {\"enabled\": false, \"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-pmm\", \"serverHost\": \"monitoring-service\", \"serverUser\": \"pmm\", \"proxysql\": {\"affinity\": {\"antiAffinityTopologyKey\": \"none\"}, \"enabled\": true, \"gracePeriod\": 30, \"image\": \"percona/percona-xtradb-cluster-operator:1.5.0-proxysql\", \"podDisruptionBudget\": {\"maxUnavailable\": 1}, \"resources\": {\"requests\": null, \"size\": 3, \"volumeSpec\": {\"persistentVolumeClaim\": {\"resources\": {\"requests\": {\"storage\": \"2Gi\"}}}}, \"pxc\": {\"affinity\": {\"antiAffinityTopologyKey\": \"none\"}, \"gracePeriod\": 600, \"image\": \"percona/percona-xtradb-cluster:8.0.19-10.1\", \"podDisruptionBudget\": {\"maxUnavailable\": 1}, \"resources\": {\"requests\": null, \"size\": 3, \"volumeSpec\": {\"persistentVolumeClaim\": {\"resources\": {\"requests\": {\"storage\": \"6Gi\"}}}}, \"secretsName\": \"my-cluster-secrets\", \"sslInternalSecretName\": \"my-cluster-ssl-internal\", \"sslSecretName\": \"my-cluster-ssl\", \"updateStrategy\": \"RollingUpdate\", \"vaultSecretName\": \"keyring-secret-vault\"}}}\n"}
    },
    "creationTimestamp": "2020-06-01T16:50:05Z",
    "finalizers": [
      "delete-pxc-pods-in-order"
    ],
    "generation": 3,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1-5-0",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:metadata": {
            "f:annotations": {
              ".": {
                "kubect1.kubernetes.io/last-applied-configuration": {
                }
              }
            },
            "f:finalizers": {
            }
          }
        },
        "spec": {
          ".": {
            "allowUnsafeConfigurations": {
            },
            "backup": {
              ".": {
                "image": {
                },
                "schedule": {
                },
                "serviceAccountName": {
                },
                "storages": {
                  ".": {
                    "fs-pvc": {
                      ".": {
                        "type": {
                        },
                        "volume": {
                          ".": {
                            "persistentVolumeClaim": {
                              ".": {
                                "accessModes": {
                                }
                              }
                            }
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    ]
  }
}

```

```

        },
        "f:resources":{
            ".":{

            },
            "f:requests":{
                ".":{

                },
            },
            "f:storage":{

            }
        }
    },
    "f:s3-us-west":{
        ".":{

        },
        "f:s3":{
            ".":{

            },
            "f:bucket":{

            },
            "f:credentialsSecret":{

            },
            "f:region":{

            }
        },
        "f:type":{

        }
    }
},
"f:pnm":{
    ".":{

    },
    "f:image":{

    },
    "f:serverHost":{

    },
    "f:serverUser":{

    }
},
"f:proxysql":{
    ".":{

    },
    "f:affinity":{
        ".":{

        },
        "f:antiAffinityTopologyKey":{

        }
    },
    "f:enabled":{

    },
    "f:gracePeriod":{

    },
    "f:image":{

    },
    "f:podDisruptionBudget":{
        ".":{

        },
        "f:maxUnavailable":{

        }
    },
    "f:resources":{

```

```

    },
    "f:size":{
    },
    "f:volumeSpec":{
      ".":{
      },
      "f:persistentVolumeClaim":{
        ".":{
        },
        "f:resources":{
          ".":{
          },
          "f:requests":{
            ".":{
            },
            "f:storage":{
            }
          }
        }
      }
    },
    "f:pxc":{
      ".":{
      },
      "f:affinity":{
        ".":{
        },
        "f:antiAffinityTopologyKey":{
        }
      }
    },
    "f:gracePeriod":{
    },
    "f:podDisruptionBudget":{
      ".":{
      },
      "f:maxUnavailable":{
      }
    },
    "f:resources":{
    },
    "f:size":{
    },
    "f:volumeSpec":{
      ".":{
      },
      "f:persistentVolumeClaim":{
        ".":{
        },
        "f:resources":{
          ".":{
          },
          "f:requests":{
            ".":{
            },
            "f:storage":{
            }
          }
        }
      }
    },
    "f:secretsName":{
    },
    "f:sslInternalSecretName":{
    },
  },

```

```

    "f:sslSecretName":{
      },
      "f:updateStrategy":{
        },
        "f:vaultSecretName":{
          }
        }
      },
      "manager":"kubect1",
      "operation":"Update",
      "time":"2020-06-01T16:52:30Z"
    },
    {
      "apiVersion":"pxc.percona.com/v1",
      "fieldsType":"FieldsV1",
      "fieldsV1":{
        "f:spec":{
          "f:pxc":{
            "f:image":{
              }
            }
          }
        }
      },
      "manager":"kubect1",
      "operation":"Update",
      "time":"2020-06-01T17:18:58Z"
    },
    {
      "apiVersion":"pxc.percona.com/v1",
      "fieldsType":"FieldsV1",
      "fieldsV1":{
        "f:spec":{
          "f:backup":{
            "f:storages":{
              "f:fs-pvc":{
                "f:podSecurityContext":{
                  ".":{
                    },
                    "f:fsGroup":{
                      },
                      "f:supplementalGroups":{
                        }
                      },
                      "f:s3":{
                        ".":{
                          },
                          "f:bucket":{
                            },
                            "f:credentialsSecret":{
                              }
                            }
                          },
                          "f:s3-us-west":{
                            "f:podSecurityContext":{
                              ".":{
                                },
                                "f:fsGroup":{
                                  },
                                  "f:supplementalGroups":{
                                    }
                                }
                              }
                            }
                          }
                        }
                      },
                      "f:pmm":{
                        "f:resources":{
                          }
                        }
                      },
                      "f:proxysql":{
                        "f:podSecurityContext":{
                          ".":{
                            },

```



```

    "f:fsGroup":{
      },
      "f:supplementalGroups":{
        }
      },
      "f:sslInternalSecretName":{
        },
        "f:sslSecretName":{
          },
          "f:volumeSpec":{
            "f:persistentVolumeClaim":{
              "f:accessModes":{
                }
              }
            }
          },
          "f:pxc":{
            "f:podSecurityContext":{
              ".":{
                },
                "f:fsGroup":{
                  },
                  "f:supplementalGroups":{
                    }
                  },
                  "f:sslInternalSecretName":{
                    },
                    "f:sslSecretName":{
                      },
                      "f:vaultSecretName":{
                        },
                        "f:volumeSpec":{
                          "f:persistentVolumeClaim":{
                            "f:accessModes":{
                              }
                            }
                          }
                        }
                      }
                    }
                  },
                  "f:status":{
                    ".":{
                      },
                      "f:conditions":{
                        },
                        "f:host":{
                          },
                          "f:message":{
                            },
                            "f:observedGeneration":{
                              },
                              "f:proxysql":{
                                ".":{
                                  },
                                  "f:ready":{
                                    },
                                    "f:size":{
                                      },
                                      "f:status":{
                                        }
                                      }
                                    },
                                    "f:pxc":{
                                      ".":{
                                        },
                                        "f:message":{

```



```

    },
    "resources":{
      "requests":null
    },
    "size":3,
    "volumeSpec":{
      "persistentVolumeClaim":{
        "resources":{
          "requests":{
            "storage":"2Gi"
          }
        }
      }
    }
  },
  "pxc":{
    "affinity":{
      "antiAffinityTopologyKey":"none"
    },
    "gracePeriod":600,
    "image":"percona/percona-xtradb-cluster:5.7.30-31.43",
    "podDisruptionBudget":{
      "maxUnavailable":1
    },
    "resources":{
      "requests":null
    },
    "size":3,
    "volumeSpec":{
      "persistentVolumeClaim":{
        "resources":{
          "requests":{
            "storage":"6Gi"
          }
        }
      }
    }
  },
  "secretsName":"my-cluster-secrets",
  "sslInternalSecretName":"my-cluster-ssl-internal",
  "sslSecretName":"my-cluster-ssl",
  "updateStrategy":"RollingUpdate",
  "vaultSecretName":"keyring-secret-vault"
},
"status":{
  "conditions":[
    {
      "lastTransitionTime":"2020-06-01T16:50:37Z",
      "message":"create newStatefulSetNode: StatefulSet.apps \"cluster1-pxc\" is invalid: spec.updateStrategy: Invalid value: apps.StatefulSetUpdateStrategy{Type:\\\"SmartUpdate\\\", RollingUpdate:(*apps.RollingUpdateStatefulSetStrategy)(nil)}: must be 'RollingUpdate' or 'OnDelete'",
      "reason":"ErrorReconcile",
      "status":"True",
      "type":"Error"
    },
    {
      "lastTransitionTime":"2020-06-01T16:52:31Z",
      "status":"True",
      "type":"Initializing"
    },
    {
      "lastTransitionTime":"2020-06-01T16:55:59Z",
      "status":"True",
      "type":"Ready"
    },
    {
      "lastTransitionTime":"2020-06-01T17:19:15Z",
      "status":"True",
      "type":"Initializing"
    }
  ],
  "host":"cluster1-proxysql.default",
  "message":[
    "PXC: pxc: back-off 40s restarting failed container=pxc pod=cluster1-pxc-2_default(87cdf1a8-0fb3-4bc0-b50d-f66a0a73c087); "
  ],
  "observedGeneration":3,
  "proxysql":{
    "ready":3,
    "size":3,
    "status":"ready"
  },
  "pxc":{
    "message":"pxc: back-off 40s restarting failed container=pxc pod=cluster1-pxc-2_default(87cdf1a8-0fb3-4bc0-b50d-f66a0a73c087); ",
    "ready":2,
    "size":3,
    "status":"initializing"
  }
},

```

```
    "state":"initializing"
  }
}
```

## Pass custom my.cnf during the creation of Percona XtraDB Cluster

### Description:

Create a custom config map containing the contents of the file my.cnf to be passed on to the Percona XtraDB Cluster containers when they are created

### Kubectl Command:

```
$ kubectl create configmap cluster1-pxc3 --from-file=my.cnf
```

### my.cnf (Contains mysql configuration):

```
[mysqld]
max_connections=250
```

### URL:

```
https://$API_SERVER/api/v1/namespaces/default/configmaps
```

### Authentication:

```
Authorization: Bearer $KUBE_TOKEN
```

### cURL Request:

```
$ curl -k -v -XPOST "https://$API_SERVER/api/v1/namespaces/default/configmaps" \
-H "Accept: application/json" \
-H "Authorization: Bearer $KUBE_TOKEN" \
-d '{"apiVersion":"v1","data":{"my.cnf":"[mysqld]\nmax_connections=250\n"},"kind":"ConfigMap","metadata":{"creationTimestamp":null,"name":"cluster1-pxc3"}}' \
-H "Content-Type: application/json"
```

### Request Body:

#### Example

```
{
  "apiVersion":"v1",
  "data":{"
    "my.cnf":"[mysqld]\nmax_connections=250\n"
  },
  "kind":"ConfigMap",
  "metadata":{"
    "creationTimestamp":null,
    "name":"cluster1-pxc3"
  }
}
```

### Input:

1. data (Object {filename : contents(String, min-length:0)}): contains filenames to create in config map and its contents
2. metadata: name(String, min-length: 1): contains name of the configmap
3. kind (String): type of object to create

### Response:

## Example

```
{
  "kind": "ConfigMap",
  "apiVersion": "v1",
  "metadata": {
    "name": "cluster1-pxc3",
    "namespace": "default",
    "selfLink": "/api/v1/namespaces/default/configmaps/cluster1-pxc3",
    "uid": "d92c7196-f399-4e20-abc7-b5de62c0691b",
    "resourceVersion": "85258",
    "creationTimestamp": "2020-05-28T14:19:41Z",
    "managedFields": [
      {
        "manager": "kubectl",
        "operation": "Update",
        "apiVersion": "v1",
        "time": "2020-05-28T14:19:41Z",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:data": {
            ".": {
              },
              "f:my.cnf": {
                }
              }
            }
          }
        ]
      },
      {
        "data": {
          "my.cnf": ""
        }
      }
    ]
  }
}
```

## Backup Percona XtraDB Cluster

### Description:

Takes a backup of the Percona XtraDB Cluster containers data to be able to recover from disasters or make a roll-back later

### Kubectl Command:

```
$ kubectl apply -f percona-xtradb-cluster-operator/deploy/backup/backup.yaml
```

### URL:

```
https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterbackups
```

### Authentication:

```
Authorization: Bearer $KUBE_TOKEN
```

### cURL Request:

```
$ curl -k -v -XPOST "https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterbackups" \
-H "Accept: application/json" \
-H "Content-Type: application/json" \
-d "@backup.json" -H "Authorization: Bearer $KUBE_TOKEN"
```

### Request Body (backup.json):

### Example

```
{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBClusterBackup",
  "metadata": {
    "name": "backup1"
  },
  "spec": {
    "pxcCluster": "cluster1",
    "storageName": "fs-pvc"
  }
}
```

#### Input:

##### 1. metadata:

name(String, min-length:1): name of backup to create

##### 1. spec:

1. pxcCluster(String, min-length:1) : `name of Percona XtraDB Cluster`
2. storageName(String, min-length:1) : `name of storage claim to use`

#### Response:

### Example

```
{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBClusterBackup",
  "metadata": {
    "creationTimestamp": "2020-05-27T23:56:33Z",
    "generation": 1,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:spec": {
            ".": {
              },
              "f:pxcCluster": {
                },
              "f:storageName": {
                }
            }
          }
        },
        "manager": "kubect1",
        "operation": "Update",
        "time": "2020-05-27T23:56:33Z"
      }
    ],
    "name": "backup1",
    "namespace": "default",
    "resourceVersion": "26024",
    "selfLink": "/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterbackups/backup1",
    "uid": "95a354b1-e25b-40c3-8be4-388acca055fe"
  },
  "spec": {
    "pxcCluster": "cluster1",
    "storageName": "fs-pvc"
  }
}
```

## Restore Percona XtraDB Cluster

#### Description:

Restores Percona XtraDB Cluster data to an earlier version to recover from a problem or to make a roll-back

**Kubectl Command:**

```
$ kubectl apply -f percona-xtradb-cluster-operator/deploy/backup/restore.yaml
```

**URL:**

```
https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterrestores
```

**Authentication:**

```
Authorization: Bearer $KUBE_TOKEN
```

**cURL Request:**

```
$ curl -k -v -XPOST "https://$API_SERVER/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterrestores" \
-H "Accept: application/json" \
-H "Content-Type: application/json" \
-d "@restore.json" \
-H "Authorization: Bearer $KUBE_TOKEN"
```

**Request Body (restore.json):**

```
Example
{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBClusterRestore",
  "metadata": {
    "name": "restore1"
  },
  "spec": {
    "pxcCluster": "cluster1",
    "backupName": "backup1"
  }
}
```

**Input:**

1. **metadata:**

name(String, min-length:1): name of restore to create

1. **spec:**

- 1. pxcCluster(String, min-length:1) : `name of Percona XtraDB Cluster`
- 2. backupName(String, min-length:1) : `name of backup to restore from`

**Response:**

Example

```
{
  "apiVersion": "pxc.percona.com/v1",
  "kind": "PerconaXtraDBClusterRestore",
  "metadata": {
    "creationTimestamp": "2020-05-27T23:59:41Z",
    "generation": 1,
    "managedFields": [
      {
        "apiVersion": "pxc.percona.com/v1",
        "fieldsType": "FieldsV1",
        "fieldsV1": {
          "f:spec": {
            ".": {
              },
              "f:backupName": {
                },
              "f:pxcCluster": {
                }
            }
          },
          "manager": "kubect1",
          "operation": "Update",
          "time": "2020-05-27T23:59:41Z"
        }
      ],
      "name": "restore1",
      "namespace": "default",
      "resourceVersion": "26682",
      "selfLink": "/apis/pxc.percona.com/v1/namespaces/default/perconaxtradbclusterrestores/restore1",
      "uid": "770c3471-be17-46fb-b0a6-e706685ab2fc"
    },
    "spec": {
      "backupName": "backup1",
      "pxcCluster": "cluster1"
    }
  }
}
```



# Frequently Asked Questions

## Why do we need to follow “the Kubernetes way” when Kubernetes was never intended to run databases?

As it is well known, the Kubernetes approach is targeted at stateless applications but provides ways to store state (in Persistent Volumes, etc.) if the application needs it. Generally, a stateless mode of operation is supposed to provide better safety, sustainability, and scalability, it makes the already-deployed components interchangeable. You can find more about substantial benefits brought by Kubernetes to databases in [this blog post](#).

The architecture of state-centric applications (like databases) should be composed in a right way to avoid crashes, data loss, or data inconsistencies during hardware failure. Percona Operator for MySQL provides out-of-the-box functionality to automate provisioning and management of highly available MySQL database clusters on Kubernetes.

## How can I contact the developers?

The best place to discuss Percona Operator for MySQL based on Percona XtraDB Cluster with developers and other community members is the [community forum](#).

If you would like to report a bug, use the [Percona Operator for MySQL project in JIRA](#).

## What is the difference between the Operator quickstart and advanced installation ways?

As you have noticed, the installation section of docs contains both quickstart and advanced installation guides.

The quickstart guide is simpler. It has fewer installation steps in favor of predefined default choices. Particularly, in advanced installation guides, you separately apply the Custom Resource Definition and Role-based Access Control configuration files with possible edits in them. At the same time, quickstart guides rely on the all-inclusive bundle configuration.

At another point, quickstart guides are related to specific platforms you are going to use (Minikube, Google Kubernetes Engine, etc.) and therefore include some additional steps needed for these platforms.

Generally, rely on the quickstart guide if you are a beginner user of the specific platform and/or you are new to the Percona Distribution for MySQL Operator as a whole.

## Which versions of MySQL does the Percona Operator for MySQL support?

Percona Operator for MySQL based on Percona XtraDB Cluster provides a ready-to-use installation of the MySQL-based Percona XtraDB Cluster inside your Kubernetes installation. It works with both MySQL 8.0 and 5.7 branches, and the exact version is determined by the Docker image in use.

Percona-certified Docker images used by the Operator are listed [here](#). As you can see, both Percona XtraDB Cluster 8.0 and 5.7 are supported with the following recommended versions: 8.0.41-32.1 and 5.7.44-31.65. Three major numbers in the XtraDB Cluster version refer to the version of Percona Server in use. More details on the exact Percona Server version can be found in the release notes ([8.0](#), [5.7](#)).

## How is HAProxy better than ProxySQL?

Percona Operator for MySQL based on Percona XtraDB Cluster supports both HAProxy and ProxySQL as a load balancer. HAProxy is turned on by default, but both solutions are similar in terms of their configuration and operation under the control of the Operator.

Still, they have technical differences. HAProxy is a general and widely used high availability, load balancing, and proxying solution for TCP and HTTP-based applications. ProxySQL provides similar functionality but is specific to MySQL clusters. As an SQL-aware solution, it is able to provide more tight internal integration with MySQL instances.

Both projects do a really good job with the Operator. The proxy choice should depend mostly on application-specific workload (including object-relational mapping), performance requirements, advanced routing and caching needs with one or another project, components already in use in the current infrastructure, and any other specific needs of the application.

## How can I create a directory on the node to use it as a local storage

You can [configure hostPath volume](#) to mount some existing file or directory from the node's filesystem into the Pod and use it as a local storage. The directory used for local storage should already exist in the node's filesystem. You can create it through the shell access to the node, with `mkdir` command, as all other directories. Alternatively you can create a Pod which will do this job. Let's suppose you are going to use `/var/run/data-dir` directory as your local storage, describing it in the `deploy/cr.yaml` configuration file as follows:

```
...
pxc:
  ...
  volumeSpec:
    hostPath:
      path: /var/run/data-dir
      type: Directory
  containerSecurityContext:
    privileged: false
  podSecurityContext:
    runAsUser: 1001
    runAsGroup: 1001
    supplementalGroups: [1001]
  nodeSelector:
    kubernetes.io/hostname: a.b.c
```

Create the yaml file (e.g. `mypod.yaml`), with the following contents:

```
apiVersion: v1
kind: Pod
metadata:
  name: hostpath-helper
spec:
  containers:
  - name: init
    image: busybox
    command: ["install", "-o", "1001", "-g", "1001", "-m", "755", "-d", "/mnt/data-dir"]
    volumeMounts:
    - name: root
      mountPath: /mnt
      securityContext:
        runAsUser: 0
  volumes:
  - name: root
    hostPath:
      path: /var/run
  restartPolicy: Never
  nodeSelector:
    kubernetes.io/hostname: a.b.c
```

Don't forget to apply it as usual:

```
$ kubectl apply -f mypod.yaml
```

## How can I add custom sidecar containers to my cluster?

The Operator allows you to deploy additional (so-called *sidecar*) containers to the Pod. You can use this feature to run debugging tools, some specific monitoring solutions, etc. Add such sidecar container to the `deploy/cr.yaml` configuration file, specifying its name and image, and possibly a command to run:

```
spec:
  pxc:
    ....
    sidecars:
    - image: busybox
      command: ["/bin/sh"]
      args: ["-c", "while true; do echo echo $(date -u) 'test' >> /dev/null; sleep 5; done"]
      name: my-sidecar-1
    ....
```

You can add `sidecars` subsection to `pxc`, `haproxy`, and `proxysql` sections.

**Note**

Custom sidecar containers [can easily access other components of your cluster](#). Therefore they should be used carefully and by experienced users only.

Find more information on sidecar containers in the appropriate [documentation page](#).

## How to get core dumps in case of the Percona XtraDB Cluster crash

In the Percona XtraDB Cluster crash case, gathering all possible information for enhanced diagnostics to be shared with Percona Support helps to solve an issue faster. One of such helpful artifacts is [core dump](#).

Percona XtraDB Cluster can create core dumps on crush [using libcoredumper](#). The Operator has this feature turned on by default. Core dumps are saved to DATADIR (`var/lib/mysql/`). You can find appropriate core files in the following way (substitute `some-name-pxc-1` with the name of your Pod):

```
$ kubectl exec some-name-pxc-1 -c pxc -it -- sh -c 'ls -alh /var/lib/mysql/ | grep core'
-rw----- 1 mysql mysql 1.3G Jan 15 09:30 core.20210015093005
```

When identified, the appropriate core dump can be downloaded as follows:

```
$ kubectl cp some-name-pxc-1:/var/lib/mysql/core.20210015093005 /tmp/core.20210015093005
```

**Note**

It is useful to provide Build ID and Server Version in addition to core dump when Creating a support ticket. Both can be found from logs:

```
$ kubectl logs some-name-pxc-1 -c logs

[1] init-deploy-949.some-name-pxc-1.mysqlld-error.log: [1610702394.259356066, {"log"=>"09:19:54 UTC - mysqlld got signal 11 ;"}]
[2] init-deploy-949.some-name-pxc-1.mysqlld-error.log: [1610702394.259356829, {"log"=>"Most likely, you have hit a bug, but this error can also be caused by malfunctioning hardware."}]
[3] init-deploy-949.some-name-pxc-1.mysqlld-error.log: [1610702394.259457282, {"log"=>"Build ID: 5a2199b1784b967a713a3bde8d996dc517c41adb"}]
[4] init-deploy-949.some-name-pxc-1.mysqlld-error.log: [1610702394.259465692, {"log"=>"Server Version: 8.0.21-12.1 Percona XtraDB Cluster (GPL), Release rel12, Revision 4d973e2, WSREP version 26.4.3, wsrep_26.4.3"}]
.....
```

## How to choose between HAProxy and ProxySQL when configuring the cluster?

You can configure the Operator to use one of two different proxies, HAProxy (the default choice) and ProxySQL. Both solutions are fully supported by the Operator, but they have some differences in the architecture, which can make one of them more suitable than the other one in some use cases.

The main difference is that HAProxy operates in TCP mode as an [OSI level 4 proxy](#), while ProxySQL implements OSI level 7 proxy, and thus can provide some additional functionality like read/write split, firewalling and caching.

From the other side, utilizing HAProxy for the service is the easier way to go, and getting use of the ProxySQL level 7 specifics requires good understanding of Kubernetes and ProxySQL.

You can enable ProxySQL only at cluster creation time. Otherwise you will be able to use HAProxy only. The switch from HAProxy to ProxySQL is not possible, because ProxySQL does not yet support [caching\\_sha2\\_password](#) MySQL authentication plugin used by the Operator by default instead of the older [mysql\\_native\\_password](#) one.

See more detailed functionality and performance comparison of using the Operator with both solutions in [this blog post](#).

## Which additional access permissions are used by the Custom Resource validation webhook?

The `spec.enableCRValidationWebhook` key in the [deploy/cr.yaml](#) file enables or disables schema validation done by the Operator before applying `cr.yaml` file. This feature works only in [cluster-wide mode](#) due to access restrictions. It uses the following additional [RBAC permissions](#):

```
- apiGroups:
  - admissionregistration.k8s.io
  resources:
  - validatingwebhookconfigurations
  verbs:
  - get
  - list
  - watch
  - create
  - update
  - patch
  - delete
```

# Development documentation

## How we use artificial intelligence

The technical writer oversees the integration of AI-driven tools and platforms into the documentation workflow, ensuring that AI-generated text meets the standards for clarity, coherence, and accuracy. While AI assists in tasks such as content generation, language enhancement, and formatting optimization, the technical writer is responsible for validating and refining the output to ensure its suitability for the intended audience.

Throughout the documentation process, the technical writer reviews the quality and relevance of AI-generated content in detail and with critical judgment. By leveraging their expertise in language, communication, and subject matter knowledge, the technical writer collaborates with AI systems to refine and tailor the documentation to meet the specific needs and preferences of the audience.

While AI accelerates the documentation process and enhances productivity, the technical writer verifies the information's accuracy and maintains consistency in terminology, style, and tone. The technical writer ensures that the final document reflects the company's commitment to excellence.

# Copyright and licensing information

## Documentation licensing

Percona Operator for MySQL based on Percona XtraDB Cluster documentation is (C)2009-2023 Percona LLC and/or its affiliates and is distributed under the [Creative Commons Attribution 4.0 International License](#).

# Trademark policy

This [Trademark Policy](#) is to ensure that users of Percona-branded products or services know that what they receive has really been developed, approved, tested and maintained by Percona. Trademarks help to prevent confusion in the marketplace, by distinguishing one company's or person's products and services from another's.

Percona owns a number of marks, including but not limited to Percona, XtraDB, Percona XtraDB, XtraBackup, Percona XtraBackup, Percona Server, and Percona Live, plus the distinctive visual icons and logos associated with these marks. Both the unregistered and registered marks of Percona are protected.

Use of any Percona trademark in the name, URL, or other identifying characteristic of any product, service, website, or other use is not permitted without Percona's written permission with the following three limited exceptions.

*First*, you may use the appropriate Percona mark when making a nominative fair use reference to a bona fide Percona product.

*Second*, when Percona has released a product under a version of the GNU General Public License ("GPL"), you may use the appropriate Percona mark when distributing a verbatim copy of that product in accordance with the terms and conditions of the GPL.

*Third*, you may use the appropriate Percona mark to refer to a distribution of GPL-released Percona software that has been modified with minor changes for the sole purpose of allowing the software to operate on an operating system or hardware platform for which Percona has not yet released the software, provided that those third party changes do not affect the behavior, functionality, features, design or performance of the software. Users who acquire this Percona-branded software receive substantially exact implementations of the Percona software.

Percona reserves the right to revoke this authorization at any time in its sole discretion. For example, if Percona believes that your modification is beyond the scope of the limited license granted in this Policy or that your use of the Percona mark is detrimental to Percona, Percona will revoke this authorization. Upon revocation, you must immediately cease using the applicable Percona mark. If you do not immediately cease using the Percona mark upon revocation, Percona may take action to protect its rights and interests in the Percona mark. Percona does not grant any license to use any Percona mark for any other modified versions of Percona software; such use will require our prior written permission.

Neither trademark law nor any of the exceptions set forth in this Trademark Policy permit you to truncate, modify or otherwise use any Percona mark as part of your own brand. For example, if XYZ creates a modified version of the Percona Server, XYZ may not brand that modification as "XYZ Percona Server" or "Percona XYZ Server", even if that modification otherwise complies with the third exception noted above.

In all cases, you must comply with applicable law, the underlying license, and this Trademark Policy, as amended from time to time. For instance, any mention of Percona trademarks should include the full trademarked name, with proper spelling and capitalization, along with attribution of ownership to Percona Inc. For example, the full proper name for XtraBackup is Percona XtraBackup. However, it is acceptable to omit the word "Percona" for brevity on the second and subsequent uses, where such omission does not cause confusion.

In the event of doubt as to any of the conditions or exceptions outlined in this Trademark Policy, please contact [trademarks@percona.com](mailto:trademarks@percona.com) for assistance and we will do our very best to be helpful.



# Release Notes

# Percona Operator for MySQL based on Percona XtraDB Cluster Release Notes

- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.17.0 \(2025-04-14\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.1 \(2024-12-26\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.0 \(2024-12-19\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.1 \(2024-10-16\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.1 \(2024-10-16\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.0 \(2024-08-20\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.0 \(2024-03-04\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.13.0 \(2023-07-11\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.12.0 \(2022-12-07\)](#)
- [Percona Operator for MySQL based on Percona XtraDB Cluster 1.11.0 \(2022-06-03\)](#)
- [Percona Distribution for MySQL Operator 1.10.0 \(2021-11-24\)](#)
- [Percona Distribution for MySQL Operator 1.9.0 \(2021-08-09\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.8.0 \(2021-05-26\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.7.0 \(2021-02-02\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.6.0 \(2020-09-09\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.5.0 \(2020-07-21\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.4.0 \(2020-04-29\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.3.0 \(2020-01-06\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.2.0 \(2019-09-20\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.1.0 \(2019-07-15\)](#)
- [Percona Kubernetes Operator for Percona XtraDB Cluster 1.0.0 \(2019-05-29\)](#)

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.17.0 (2025-04-14)

## Installation

## Release Highlights

This release of Percona Operator for MySQL based on Percona XtraDB Cluster includes the following new features and improvements:

### Improved observability for HAProxy and ProxySQL

Get insights into the HAProxy and ProxySQL performance by connecting to their statistics pages. Use the `cluster-name-haproxy:8084` and `cluster-name-proxysql:6070` endpoints to do so. Learn about other available ports in the [documentation](#).

### Improved cluster load management during backups

If parallel backups overload your cluster, you can turn off parallel execution to prevent this. Previously, this meant that you could only run one backup at a time - no new backups could start until the current one was finished. Now, the Operator queues backups and runs them one after another automatically. You can fine-tune the backup sequence by setting the start time for all backups or for a specific on-demand one using the `spec.backup.startingDeadlineSeconds` Custom Resource option. This provides greater control over backup operations.

Another improvement is for the case when your database cluster becomes unhealthy, for example, when a Pod crashes or restarts. The Operator suspends running backups to reduce the cluster's load. Once the cluster recovers and reports a Ready status, the Operator resumes the suspended backup. To further offload the cluster during an unhealthy state, you can configure how long a backup remains suspended by using the `spec.backup.suspendedDeadlineSeconds` Custom Resource option. If this time expires before the cluster recovers, the backup is marked as "failed."

### Monitor PMM Client health and status

Percona Monitoring and Management (PMM) is a great tool to [monitor the health of your database cluster](#). Now you can also learn if PMM itself is healthy using probes - a Kubernetes diagnostics mechanism to check the health and status of containers. Use the `spec.pmm.readinessProbes.*` and `spec.pmm.livenessProbes.*` Custom Resource options to fine-tune Readiness and Liveness probes for PMM Client.

### Improved observability of binary log backups

Get insights into the success and failure rates of binlog operations, timeliness of processing and uploads and potential gaps or inconsistencies in binlog data with the Prometheus metrics added for the Operator. Gather this data by connecting to the `<pitr-pod-service>:8080/metrics` endpoint. Learn more about the available metrics in the [documentation](#).

## Deprecation, Rename and Removal

The `spec.haproxy.exposePrimary.enabled` field is deprecated. If enabled via the `spec.haproxy.enabled`, the HAProxy primary service is already exposed.

## New Features

- [K8SPXC-747](#), [K8SPXC-1473](#) - Add the ability to access the statistics pages for HAProxy and ProxySQL
- [K8SPXC-1366](#) - Add the ability to queue backups and run them sequentially, and to optimize the cluster load with the ability to suspend backups for an unhealthy cluster. A user can assign the start time and suspension time to backups to manage them better.
- [K8SPXC-1432](#) - Enable users to configure cluster-wide Operator deployments in OpenShift certified catalog using OLM.

## Improvements

- [K8SPXC-1367](#) - Now a user can configure Readiness and Liveness probes for PMM Client container to check its health and status

- [K8SPXC-1461](#) - Improve logging for resizing PVC with the information about successful and failed PVC resize. Log errors on resize attempts if the Storage Class doesn't support resizing.
- [K8SPXC-1466](#) - Mark the containers that provide the service as default ones with the annotation. This enables a user to connect to a Pod without explicitly specifying a container.
- [K8SPXC-1473](#) - Add the ability to connect to the built-in statistics pages for HAProxy and ProxySQL by exposing the ports for those pages
- [K8SPXC-1475](#) - Update the backup image to use AWS CLI instead of MinIO CLI due to the license change
- [K8SPXC-1510](#) - Add the ability to suppress messages about the use of deprecated features in MySQL Error Log by adding the `log_error_suppression_list` key from the `my.cnf` configuration file and defining the message number in the `spec.pxc.configuration` subsection of the Custom Resource manifest. See [how to change MySQL options](#) for steps. This improves readability for MySQL error log.
- [K8SPXC-1512](#) - For Percona XtraDB Cluster version 8.4 and above, binary log user defined functions for point-in-time recovery (`binlog_utils_udf`) are now installed as a component instead of a plugin. This improves their compatibility across platforms and provides automatic dependency handling.
- [K8SPXC-1542](#) - Improve binlog upload for large files to Azure blob storage with the ability to define the block size and the number of concurrent writers for the upload (Thanks to user dcaputo-harmoni for contribution)
- [K8SPXC-1543](#) - Set PITR controller reference for binlog-collector deployment the same way as it's set for PXC and proxy StatefulSets. This creates a connection between PITR deployment and cluster resource (Thank you Vlad Gusev for the contribution)
- [K8SPXC-1544](#) - Improve observability of binlog collector by adding the support of basic Prometheus metrics (Thank you Vlad Gusev for the contribution)
- [K8SPXC-1567](#) - Normalize duplicate slashes if the bucket path for binlog collector ends with a slash (`/`) (Thank you Vlad Gusev for the contribution)
- [K8SPXC-1596](#) - Assign a correct status to a backup if data upload fails due to incomplete backup
- [K8SPXC-1620](#) - Fixed the issue with a failing backup by adding a retry logic to the cloud storage cleanup task to check for uploaded files and clean them up before uploading new files

## Bugs Fixed

- [K8SPXC-1152](#) Fixed the issue with the restore process being stuck when the Operator is restarted by setting annotations on the `perconaxtradbclusterrestores` object
- [K8SPXC-1482](#) Fixed the issue with the excessive connection resets on every pod recreation because the cluster's peer-list is not aware of Time To Live (TTL) defined for Kubernetes DNS records. Now there's a 30 second waiting period after a peer update (Thank you Vlad Gusev for reporting this issue and contributing to it)
- [K8SPXC-1483](#) - Fixed the bug where the point-in-time recovery collector process hangs if `mysqlbinlog` cannot connect to the database and start. Now the named pipeline is created with the `O_RDONLY` (Open for Read Only) and `O_NONBLOCK` (Non-Blocking Mode) to unlock the point-in-time recovery collector process. (Thank you Vlad Gusev for reporting this issue and contributing to it)
- [K8SPXC-1509](#) - Fixed the bug where the cluster enters the error state temporarily if point-in-time is enabled for it.
- [K8SPXC-1534](#) - Fixed the issue with the inconsistent secret reconciliation by improving the controller's behavior to timely sync the secret cache and create an internal Secret immediately after its reconciliation.
- [K8SPXC-1538](#) - Fixed the issue with the Operator failing when it tries to reconcile the Custom Resource for the `haproxy-replica` service if the `haproxy-primary` service has the type `LoadBalancer` and the `LoadBalancerSourceRanges` value defined. Now the `haproxy-replica` service inherits this configuration.
- [K8SPXC-1546](#), [K8SPXC-1549](#) - Fixed the issue with the PITR pod crashing on attempt to assign a GTID set to each binlog if the database cluster has a large number of binlogs by caching the `binlog->gtid` set pairs
- [K8SPXC-1547](#) - Removed the outdated example from the `backup.yaml` manifest and update the documentation how to track backup progress
- [K8SPXC-1616](#) - Fixed a bug where the ProxySQL fails to be configured if the password for a `proxysqladmin` user starts with a star (`*`) character by reporting an error and making the Operator regenerate a new password that doesn't start with a star (Thank you Chris Fidao for reporting this issue and contribution)

## Supported Software

The Operator was developed and tested with the following software:

- Percona XtraDB Cluster versions 8.4.3-3.1 (Tech preview), 8.0.41-32.1, and 5.7.44-31.65
- Percona XtraBackup versions 8.4.0-1, 8.0.35-32, and 2.4.29

- HAProxy 2.8.14
- ProxySQL 2.7.1-1
- LogCollector based on fluent-bit 4.0.0
- PMM Client 2.44.0

Other options may also work but have not been tested.

## Supported Platforms

Percona Operators are designed for compatibility with all [CNCF-certified](#) Kubernetes distributions. Our release process includes targeted testing and validation on major cloud provider platforms and OpenShift, as detailed below for Operator version 1.16.0:

- [Google Kubernetes Engine \(GKE\)](#) 1.29 - 1.32
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#) 1.30 - 1.32
- [Azure Kubernetes Service \(AKS\)](#) 1.30 - 1.32
- [OpenShift](#) 4.14 - 4.18
- [Minikube](#) 1.35.0 based on Kubernetes 1.32.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

## Percona certified images

Find Percona's certified Docker images that you can use with the Percona Operator for MySQL based on Percona XtraDB Cluster in the following table.

### Images released with the Operator version 1.17.0:

| Image  | Digest   |
|--|--|
| percona/percona-xtradb-cluster-operator:1.17.0 (x86_64)                    | da9aa5c7cb546c60624b927bdd273fc3646bc5a027bcc6f138291bad4da9b7b8 |
| percona/percona-xtradb-cluster-operator:1.17.0 (ARM64)                     | 2b61ed62848521071bea18988461e99123ea5d5a92465ab046d0f179b5c0b8ac |
| percona/haproxy:2.8.14   | 6de8c402d83b88dae7403c05183fd75100774defa887c05a57ec04bc25be2305 |
| percona/proxysql:2.7.1   | 975d5c8cc7b5714a0df4dfd2111391a7a79cfa3a217f1dd6de77a83550812fc4 |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc8.4-backup-pxb8.4.0      | 3a7a8a47ad12ce783feb089e7035d50f6d5b803cec97a16067f476a426f6da8  |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc8.0-backup-pxb8.0.35     | 2f28c09027a249426b2f4393aa8b76971583d80e0c56be37f77dad49cb5cd5c4 |
| percona/percona-xtradb-cluster-operator:1.17.0-pxc5.7-backup-pxb2.4.29     | bf494243d9784a016bb4c98bd2690b0fc5fba1aa7d45d98502dff353fb68bee  |
| percona/percona-xtradb-cluster-operator:1.17.0-logcollector-fluentbit4.0.0 | 9fc0b4097c93f6dba8441d9bcb2803dc62dd8328b84288294444fbadb347f6d7 |
| percona/pmm-client:2.44.0  | 19a07dfa8c12a0554308cd11d7d38494ea02a14cfac6c051ce8ff254b7d0a4a7 |
| percona/percona-xtradb-cluster:8.4.3-3.1                                   | b7b198133e70cb1bd9d5cd1730373a62e976fd2b9bb9ca5a696fd970c1ac09bf |
| percona/percona-xtradb-cluster:8.0.41-32.1                                 | 8a6799cbded5524c6979442f8d7097831c8c6481f5106a856b44b2791ccaf0fb |
| percona/percona-xtradb-cluster:8.0.39-30.1                                 | 6a53a6ad4e7d2c2fb404d274d993414a22cb67beecf7228df9d5d994e7a09966 |
| percona/percona-xtradb-cluster:8.0.36-28.1                                 | b5cc4034ccfb0186d6a734cb749ae17f013b027e9e64746b2c876e8beef379b3 |
| percona/percona-xtradb-cluster:8.0.35-27.1                                 | 1ef24953591ef1c1ce39576843d5615d4060fd09458c7a39ebc3e2eda7ef486b |
| percona/percona-xtradb-cluster:8.0.32-24.2                                 | 1f978ab8912e1b5fc66570529cb7e7a4ec6a38adbfce1ece78159b0fca7d47a  |

| Image                                       | Digest   |
|---|--|
| percona/percona-xtradb-cluster:5.7.44-31.65 | 36fafdef46485839d4ff7c6dc73b4542b07031644c0152e911acb9734ff2be85 |
| percona/percona-xtradb-cluster:5.7.42-31.65 | 9dab86780f86ec9caf8e1032a563c131904b75a37edeaec159a93f7d0c16c603 |
| percona/percona-xtradb-cluster:5.7.39-31.61 | 9013170a71559bbac92ba9c2e986db9bda3a8a9e39ee1ee350e0ee94488bb6d7 |
| percona/percona-xtradb-cluster:5.7.36-31.55 | c7bad990fc7ca0fde89240e921052f49da08b67c7c6dc54239593d61710be504 |
| percona/percona-xtradb-cluster:5.7.34-31.51 | f8d51d7932b9bb1a5a896c7ae440256230eb69b55798ff37397aabfd58b80ccb |

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.1

- **Date**

December 26, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)


## Bugs Fixed


- [K8SPXC-1536](#): Fix a bug where scheduled backups were not working due to a bug in the Operator that was creating Kubernetes resources with the names exceeding the allowed length (Thanks to Vlad Gusev for contribution)

## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.4.2-2.1 (Tech preview), 8.0.39-30.1, and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 8.4.0-1, 8.0.35-30.1 and 2.4.29
- HAProxy 2.8.11
- ProxySQL 2.7.1
- LogCollector based on fluent-bit 3.2.2
- PMM Client 2.44.0

Percona Operators are designed for compatibility with all [CNCF-certified](#)  Kubernetes distributions. Our release process includes targeted testing and validation on major cloud provider platforms and OpenShift, as detailed below for Operator version 1.16.1:

- [Google Kubernetes Engine \(GKE\)](#)  1.28 - 1.30
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.28 - 1.31
- [Azure Kubernetes Service \(AKS\)](#)  1.28 - 1.31
- [OpenShift](#)  4.14.42 - 4.17.8
- [Minikube](#)  1.34.0 based on Kubernetes 1.31.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.16.0

- **Date**

December 19, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

### Declarative user management (technical preview)

Before the Operator version 1.16.0 custom MySQL users had to be created manually. Now the declarative creation of custom MySQL users [is supported](#) via the `users` subsection in the Custom Resource. You can specify a new user in `deploy/cr.yaml` manifest, setting the user's login name and hosts this user is allowed to connect from, `PasswordSecretRef` (a reference to a key in a Secret resource containing user's password) and as well as databases the user is going to have access to and the appropriate permissions:

```
...
users:
- name: my-user
  dbs:
  - db1
  - db2
  hosts:
  - localhost
  grants:
  - SELECT
  - DELETE
  - INSERT
  withGrantOption: true
  passwordSecretRef:
    name: my-user-pwd
    key: my-user-pwd-key
...
```

See [documentation](#) to find more details about this feature with additional explanations and the list of current limitations.

### Percona XtraDB Cluster 8.4 support (technical preview)

Percona XtraDB Cluster based on Percona Server for MySQL 8.4 versions is now supported by the Operator in addition to 8.0 and 5.7 versions. The appropriate images for Percona XtraDB Cluster and Percona XtraBackup are included into the [list of Percona-certified images](#). Being a technical preview, Percona XtraDB Cluster 8.4 is not yet recommended for production environments.

## New Features

- [K8SPXC-377](#): It is now possible to create and manage users via the Custom Resource
- [K8SPXC-1456](#): Now the user can run Percona XtraDB Cluster Pods initContainers [with a security context different](#) from the Pods security context, useful to customize deployment on tuned Kubernetes environments (Thanks to Vlad Gusev for contribution)

## Improvements

- [K8SPXC-1230](#) and [K8SPXC-1378](#): Now the Operator assigns labels to all Kubernetes objects it creates (backups/restores, Secrets, Volumes, etc.) to make them clearly distinguishable
- [K8SPXC-1411](#): Enabling/disabling TLS on a running cluster [is now possible](#) simply by toggling the appropriate Custom Resource option
- [K8SPXC-1451](#): The [automated storage scaling](#) is now disabled by default and needs to be explicitly enabled with the `enableVolumeExpansion` Custom Resource option
- [K8SPXC-1462](#): A restart of Percona XtraDB Cluster Pods is now triggered by the monitor user's password change if the user secret is used within a sidecar container, which can be useful for custom monitoring solutions (Thanks to Vlad Gusev for contribution)




- [K8SPXC-1503](#): Improved logic saves logs from the appearance of a number of temporary non-critical errors related to ProxySQL user sync and non-presence of point-in-time recovery files (Thanks to dcaputo-harmoni for contribution)
- [K8SPXC-1500](#): A new `backup.activeDeadlineSeconds` Custom Resource option was added to fail the backup job automatically after the specified timeout (Thanks to Vlad Gusev for contribution)
- [K8SPXC-1532](#): The peer-list tool used by the Operator was removed from standard HAProxy, ProxySQL and PXC Docker images because recent Operator versions are adding it with the `initContainer` approach

## Bugs Fixed

- [K8SPXC-1222](#): Fix a bug where upgrading a cluster with hundreds of thousands of tables would fail due to a timeout
- [K8SPXC-1398](#): Fix a bug which sporadically prevented the scheduled backup job Pod from successfully completing the process
- [K8SPXC-1413](#) and [K8SPXC-1458](#): Fix the Operator Pod segfault which was occurring when restoring a backup without `backupSource` Custom Resource subsection or without storage specified in the `backupSource`
- [K8SPXC-1416](#): Fix a bug where disabling parallel backups in Custom Resource caused all backups to get stuck in presence of any failed backup
- [K8SPXC-1420](#): Fix a bug where HAProxy exposed at the time of point-in-time restore could make conflicting transactions, causing the PITR Pod stuck on the duplicate key error
- [K8SPXC-1422](#): Fix the cluster endpoint change from the external IP to the service name when upgrading the Operator
- [K8SPXC-1444](#): Fix a bug where Percona XtraDB Cluster initial creation state was changing to “error” if the backup restore was taking too long
- [K8SPXC-1454](#): Fix a bug where the Operator erroneously generated SSL secrets when upgrading from 1.14.0 to 1.15.0 with `allowUnsafeConfigurations: true` Custom Resource option

## Deprecation, Rename and Removal

Operator versions older than 1.14.1 become incompatible with new HAProxy, ProxySQL and PXC Docker images due to the absence of the peer-list tool in them. If you are still using the older Operator version, make sure to update the Operator before switching to the latest database and proxy images. You can see the [list of Percona certified images](#) for the current release, and check image versions certified for previous releases in the [documentation archive](#) .

## Known limitations


Being a technical preview, Percona XtraDB Cluster 8.4 doesn't support the full set of features available within 8.0. Percona XtraDB Cluster 8.4 support has following limitations in this Operator release:


- [K8SPXC-1529](#): Cross-site replication is not yet supported,
- [K8SPXC-1512](#): Point-in-time recovery doesn't work yet,
- [K8SPXC-1511](#): Encryption is not yet supported,
- [K8SPXC-1513](#): Version service does not support XtraDB Cluster 8.4 yet as well.




## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.4.2-2.1 (Tech preview), 8.0.39-30.1, and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 8.4.0-1, 8.0.35-30.1 and 2.4.29
- HAProxy 2.8.11
- ProxySQL 2.7.1
- LogCollector based on fluent-bit 3.2.2
- PMM Client 2.44.0

Percona Operators are designed for compatibility with all [CNCF-certified](#)  Kubernetes distributions. Our release process includes targeted testing and validation on major cloud provider platforms and OpenShift, as detailed below for Operator version 1.16.0:

- [Google Kubernetes Engine \(GKE\)](#)  1.28 - 1.30
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.28 - 1.31

- [Azure Kubernetes Service \(AKS\)](#)  1.28 - 1.31
- [OpenShift](#)  4.14.42 - 4.17.8
- [Minikube](#)  1.34.0 based on Kubernetes 1.31.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.1

- **Date**

October 16, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Bugs Fixed

- [K8SPXC-1476](#): Fix a bug where upgrade could put the cluster into a non-operational state if using Storage Classes without the Volume expansion capabilities, by introducing a new `enableVolumeExpansion` Custom Resource option toggling this functionality

## Deprecation, Change, Rename and Removal

- The new `enableVolumeExpansion` Custom Resource option allows to disable the [automated storage scaling with Volume Expansion capability](#). The default value of this option is `false`, which means that the automated scaling is turned off by default.

## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.0.36-28.1 and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 8.0.35-30.1 and 2.4.29-1
- HAProxy 2.8.5
- ProxySQL 2.5.5
- LogCollector based on fluent-bit 3.1.4
- PMM Client 2.42.0

The following platforms were tested and are officially supported by the Operator 1.15.1:

- [Google Kubernetes Engine \(GKE\)](#)  1.27 - 1.30
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.28 - 1.30
- [Azure Kubernetes Service \(AKS\)](#)  1.28 - 1.30
- [OpenShift](#)  4.13.46 - 4.16.7
- [Minikube](#)  1.33.1 based on Kubernetes 1.30.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.1

- **Date**

October 16, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Bugs Fixed

- [K8SPXC-1476](#): Fix a bug where upgrade could put the cluster into a non-operational state if using Storage Classes without the Volume expansion capabilities, by introducing a new `enableVolumeExpansion` Custom Resource option toggling this functionality

## Deprecation, Change, Rename and Removal






- The new `enableVolumeExpansion` Custom Resource option allows to disable the [automated storage scaling with Volume Expansion capability](#). The default value of this option is `false`, which means that the automated scaling is turned off by default.

## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.0.35-27.1 and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 2.4.29-1 and 8.0.35-30.1
- HAProxy 2.8.5-1
- ProxySQL 2.5.5-1.1
- LogCollector based on fluent-bit 2.1.10-1
- PMM Client 2.41.1

The following platforms were tested and are officially supported by the Operator 1.14.1:

- [Google Kubernetes Engine \(GKE\)](#)  1.25 - 1.29
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.24 - 1.29
- [Azure Kubernetes Service \(AKS\)](#)  1.26 - 1.28
- [OpenShift](#)  4.12.50 - 4.14.13
- [Minikube](#)  1.32.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.15.0

- **Date**

August 20, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

### General availability of the automated volume resizing

The possibility to resize Persistent Volumes [by just changing the value](#) of the `resources.requests.storage` option in the `PerconaXtraDBCluster` custom resource, introduced in the previous release as a technical preview, graduates to general availability.

### Allowing `haproxy-replica` Service to cycle through the reader instances only

By default [haproxy-replica Service](#) directs connections to all Pods of the database cluster in a round-robin manner. The new `haproxy.exposeReplicas.onlyReaders` Custom Resource option allows to modify this behavior: setting it to `true` excludes current MySQL primary instance (writer) from the list, leaving only the reader instances. By default the option is set to `false`, which means that `haproxy-replicas` sends traffic to all Pods, including the active writer. The feature can be useful to simplify the application logic by splitting read and write MySQL traffic on the Kubernetes level.

Also, it should be noted that changing `haproxy.exposeReplicas.onlyReaders` value will cause HAProxy Pods to restart.

### Fixing the overloaded `allowUnsafeConfigurations` flag

In the previous Operator versions `allowUnsafeConfigurations` Custom Resource option was used to allow configuring a cluster with unsafe parameters, such as starting it with less than 3 Percona XtraDB Cluster instances. In fact, setting this option to `true` resulted in a wide range of reduced safety features without the user's explicit intent: disabling TLS, allowing backups in unhealthy clusters, etc.

With this release, a separate `unsafeFlags` Custom Resource section is introduced for the fine-grained control of the safety loosening features:

```
unsafeFlags:
  tls: false
  pxcSize: false
  proxySize: false
  backupIfUnhealthy: false
```

If the appropriate option is set to `false` and the Operator detects unsafe parameters, it sets cluster status to `error`, and prints an error message in the log.

Also, TLS configuration is now [enabled or disabled](#) by setting `unsafeFlags.tls` and `tls.enabled` Custom Resource options to `true` or `false`.

## New Features

- [K8SPXC-1330](#): A new `haproxy.exposeReplicas.onlyReaders` Custom Resource option makes `haproxy-replicas` Service to [forward requests](#) to reader instances of the MySQL cluster, avoiding the primary (writer) instance.
- [K8SPXC-1355](#): Finalizers were renamed to contain fully qualified domain names (FQDNs), avoiding potential conflicts with other finalizer names in the same Kubernetes environment

## Improvements

- [K8SPXC-1357](#): HAProxy Pod no longer restarts when the `operator` user's password changes, which is useful for the applications with persistent connection to MySQL
- [K8SPXC-1358](#): Removing `allowUnsafeConfigurations` Custom Resource option in favor of fine-grained safety control in the `unsafeFlags` subsection
- [K8SPXC-1368](#): [Kubernetes PVC DataSources](#) for Percona XtraDB Cluster Volumes are now officially supported via the [pxc.volumeSpec.persistentVolumeClaim.dataSource](#) subsection in the Custom Resource

- [K8SPXC-1385](#): Dynamic Volume resize now checks resource quotas and the PVC storage limits
- [K8SPXC-1423](#): The `percona.com/delete-pxc-pvc` finalizer is now able to delete also temporary secrets created by the Operator

## Bugs Fixed

- [K8SPXC-1067](#): Fix a bug where changing `gracePeriod`, `nodeSelector`, `priorityClassName`, `runtimeClassName`, and `schedulerName` fields in the `haproxy` Custom Resource subsection didn't propagate changes to the `haproxy` StatefulSet
- [K8SPXC-1338](#): Fix a bug where binary log collector Pod had unnecessary restart during the Percona XtraDB Cluster rolling restart
- [K8SPXC-1364](#): Fix a bug where log rotation functionality didn't work when the `proxy_protocol_networks` option was enabled in the [Percona XtraDB Cluster custom configuration](#)
- [K8SPXC-1365](#): Fix `pxc-operator` Helm chart bug where it wasn't able to create namespaces if multiple namespaces were specified in the `watchNamespace` option
- [K8SPXC-1371](#): Fix a bug in `pxc-db` Helm chart which had wrong Percona XtraDB Cluster version for the 1.14.0 release and tried to downgrade the database in case of the helm chart upgrade
- [K8SPXC-1380](#): Fix a bug due to which values in the resources requests for the restore job Pod were overwritten by the resources limits ones
- [K8SPXC-1381](#): Fix a bug where HAProxy check script was not correctly identifying all the possible "offline" state of a PXC instance, causing applications connects to an instance NOT able to serve the query
- [K8SPXC-1382](#): Fix a bug where creating a backup on S3 storage failed automatically if `s3.credentialsSecret` Custom Resource option was not present
- [K8SPXC-1396](#): The `xtrabackup` user didn't have rights to grant privileges available in its own privilege level to other users, which caused the point-in-time recovery fail due to access denied
- [K8SPXC-1408](#): Fix a bug where the Operator blocked all restores (including ones without PiTR) in case of a binlog gap detected, instead of only blocking PiTR restores
- [K8SPXC-1418](#): Fix a bug where CA Certificate generated by cert-manager had expiration period of 1 year instead of the 3 years period used by the Operator for other generated certificates, including ones used for internal and external communications

## Deprecation, Rename and Removal





- Starting from now, `allowUnsafeConfigurations` Custom Resource option is deprecated in favor of a number of options under the `unsafeFlags` subsection. Also, starting from now the Operator will not set safe defaults automatically. Upgrading existing clusters with `allowUnsafeConfiguration=false` and a configuration considered unsafe (i.e. `pxc.size<3` or `tls.enabled=false`) will print errors in the log and the cluster will have `error` status until the values are fixed.
- Finalizers were renamed to contain fully qualified domain names:
  - `delete-pxc-pods-in-order` renamed to `percona.com/delete-pxc-pods-in-order`
  - `delete-ssl` renamed to `percona.com/delete-ssl`
  - `delete-proxysql-pvc` renamed to `percona.com/delete-proxysql-pvc`
  - `delete-pxc-pvc` renamed to `percona.com/delete-pxc-pvc`
- The `pxc-operator` Helm chart now has `createNamespace` option now is set to `false` by default, resulting in not creating any namespaces unless explicitly allowed to do so by the user

## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.0.36-28.1 and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 8.0.35-30.1 and 2.4.29-1
- HAProxy 2.8.5
- ProxySQL 2.5.5
- LogCollector based on fluent-bit 3.1.4
- PMM Client 2.42.0

The following platforms were tested and are officially supported by the Operator 1.15.0:

- [Google Kubernetes Engine \(GKE\)](#)  1.27 - 1.30
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.28 - 1.30
- [Azure Kubernetes Service \(AKS\)](#)  1.28 - 1.30
- [OpenShift](#)  4.13.46 - 4.16.7
- [Minikube](#)  1.33.1 based on Kubernetes 1.30.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.14.0

- **Date**

March 4, 2024

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

### Quickstart guide

Within this release, a [Quickstart guide](#) was added to the Operator docs, that'll set you up and running in no time! Taking a look at this guide you'll be guided step by step through quick installing (multiple options), connecting to the database, inserting data, making a backup, and even integrating with Percona Monitoring and Management (PMM) to monitor your cluster.

### Automated volume resizing

Kubernetes supports the Persistent Volume expansion as a stable feature since v1.24. Using it with the Operator previously involved manual operations. Now this is automated, and users can resize their PVCs [by just changing the value](#) of the `resources.requests.storage` option in the `PerconaXtraDBCluster` custom resource. This feature is in a technical preview stage and is not recommended for production environments.

## New Features

- [K8SPXC-1298](#): Custom `prefix` for Percona Monitoring and Management (PMM) allows using one PMM Server to monitor multiple databases even if they have identical cluster names
- [K8SPXC-1334](#): The new `lifecycle.postStart` and `lifecycle.preStop` Custom Resource options allow configuring [postStart and preStop hooks](#) for ProxySQL and HAProxy Pods
- [K8SPXC-1341](#): It is now possible to resize Persistent Volume Claims by patching the `PerconaXtraDBCluster` custom resource. Change `persistentVolumeClaim.resources.requests.storage` and let the Operator do the scaling


## Improvements

- [K8SPXC-1313](#): The `kubectl get pxc-backup` command now shows Latest restorable time to make it easier to pick a point-in-time recovery target
- [K8SPXC-1237](#): The Operator now checks if the needed Secrets exist and connects to the storage to check the existence of a backup before starting the restore process
- [K8SPXC-1079](#): Standardize cluster and components service `exposure` to have unification of the expose configuration across all Percona Operators
- [K8SPXC-1147](#): Improve log messages by printing the `Last_IO_Error` for a replication channel if it's not empty
- [K8SPXC-1151](#): The `kubectl get pxc-restore` command now shows the "Starting cluster" status to indicate that the point-in-time recovery process is finished
- [K8SPXC-1230](#): Add Labels for all Kubernetes objects created by Operator (backups/restores, Secrets, Volumes, etc.) to make them clearly distinguishable
- [K8SPXC-1271](#): Use timeout to avoid backup stalls in case of the S3 upload network issues
- [K8SPXC-1293](#) and [K8SPXC-1294](#): The new `backup.pitr.timeoutSeconds` Custom Resource option allows setting a timeout for the point-in-time recovery process
- [K8SPXC-1301](#): The Operator can now be [run locally](#) against a remote Kubernetes cluster, which simplifies the development process, substantially shortening the way to make and try minor code improvements
- [K8SPXC-200](#) and [K8SPXC-1128](#): The new `containerOptions` subsections were added to `pxc-backup`, `pxc-restore`, and `pxc` Custom Resources to allow setting custom options for xtrabackup, xstream, and xcloud tools used by the Operator
- [K8SPXC-345](#): The new `topologySpreadConstraints` Custom Resource option allows to use [Pod Topology Spread Constraints](#) to achieve even distribution of Pods across the Kubernetes cluster
- [K8SPXC-927](#): The new `serviceLabel` and `serviceAnnotation` Custom Resource options allow setting Service Labels and Annotations for XtraDB Cluster Pods



- [K8SPXC-1340](#): The new Custom Resource option allows setting custom containerSecurityContext for PMM containers (thanks Marko Weiß for report)
- [K8SPXC-1254](#): Upgrade instructions for Percona XtraDB Cluster in multi-namespace (cluster-wide) mode [were added to documentation](#)
- [K8SPXC-1276](#) and [K8SPXC-1277](#): HAProxy log format was changed to JSON with additional information such as timestamps to simplify troubleshooting

## Bugs Fixed

- [K8SPXC-1264](#): Liveness probe didn't work if `sql_mode ANSL_QUOTES` enabled
- [K8SPXC-1067](#): Fix a bug that caused the Operator not tracking changes in a number of Custom Resource options in the `haproxy` subsection
- [K8SPXC-1105](#): Fix a bug that didn't allow point-in-time recovery backups on S3-compatible storage with using self-signed certificates
- [K8SPXC-1106](#): Fix a bug which caused point-in-time recovery silently not uploading files if a corrupted binlog file existed in `/var/lib/mysql`
- [K8SPXC-1159](#): Cluster status was repeatedly switching between "ready" and "error" if the password change did not satisfy the complexity and was rejected by MySQL
- [K8SPXC-1256](#): Fix a bug where the Operator was unable to perform a cleanup by deleting a replication channel if the replication was already stopped
- [K8SPXC-1263](#): Fix a bug where point-in-time recovery was failing if the xtrabackup user password was changed in the binary log files
- [K8SPXC-1269](#): Fix a bug due to which switching from HAProxy to ProxySQL was broken for Percona XtraDB Cluster 5.7
- [K8SPXC-1274](#): PXC init container used by XtraDB Cluster and HAProxy instances inherited XtraDB Cluster resource requirements which was too much for HAProxy (Thanks Tristan for reporting)
- [K8SPXC-1275](#): Fix a bug which caused replication error after switching system accounts to `cached_sha2_password` authentication plugin which became available in the previous release
- [K8SPXC-1288](#): The Operator didn't treat the name for scheduled backup as a mandatory field
- [K8SPXC-1302](#): Fix a bug where the Operator was continuously trying to delete a backup from an S3 bucket that has a retention policy configured and `delete-s3-backup` finalizer present, which could cause out-of-memory issue in case of tight Pod's memory limits
- [K8SPXC-1333](#): Scheduled backup was failing if Percona XtraDB Cluster name was not unique across namespaces
- [K8SPXC-1335](#): Fix a bug where HAProxy was not stopping existing connections to primary in case of Percona XtraDB Cluster instance failover but only routed new ones to another instance
- [K8SPXC-1339](#): Fix a bug where HAProxy was not aware of the IP address change in case of the restarted Percona XtraDB Cluster Pod and couldn't reach it until the DNS cache update
- [K8SPXC-1345](#): Fix a regression where the Operator was unable to customize readinessProbe of the pxc container
- [K8SPXC-1350](#): Fix a bug due to which log rotate could cause locking TOI ([Total Order Isolation](#) ) DDL operation on the cluster with flush error logs, resulting in unnecessary synchronization on the whole cluster and possible warnings in logs

## Deprecation, Rename and Removal

- [K8SPXC-1079](#): Custom Resource options for service exposure of Percona XtraDB Cluster HAProxy Primary, HAProxy Replicas, and ProxySQL were moved to dedicated `pxc.expose`, `haproxy.exposePrimary`, `haproxy.exposeReplicas`, and `proxysql.expose` subsections. This brings more structure to the Custom Resource and implements the same approach across all Percona Operators. Old variants of service exposure options **are now deprecated** and will be removed in next releases
- [K8SPXC-1274](#): The `initImage` Custom Resource option which allows providing an alternative image with various options for the initial Operator installation, was moved to a dedicated subsection and is now available as `initContainer.image`
- [K8SPXC-878](#): The `clustercheck` system user deprecated in v1.12.0 was completely removed in this release






## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.0.35-27.1 and 5.7.44-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 2.4.29-1 and 8.0.35-30.1
- HAProxy 2.8.5-1
- ProxySQL 2.5.5-1.1
- LogCollector based on fluent-bit 2.1.10-1

- PMM Client 2.41.1

The following platforms were tested and are officially supported by the Operator 1.14.0:

- [Google Kubernetes Engine \(GKE\)](#)  1.25 - 1.29
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.24 - 1.29
- [Azure Kubernetes Service \(AKS\)](#)  1.26 - 1.28
- [OpenShift](#)  4.12.50 - 4.14.13
- [Minikube](#)  1.32.0

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.13.0

- **Date**

July 11, 2023

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

- It is now [possible to control](#) whether backup jobs are executed in parallel or sequentially, which can be useful to avoid the cluster overload; also, CPU and memory resource limits can now be configured for the backup restore job
- A substantial improvement of the [backup documentation](#) was done in this release, making it much easier to read, and the [backup restore options](#) have been added to the Custom Resource reference
- We are deeply committed to delivering software that truly sets the bar for quality and stability. With our latest release, we put an all-hands-on-deck approach towards fine-tuning the Operator with minor improvements, along with addressing key bugs reported by our vibrant community. We are extremely grateful to each and every person who submitted feedback and collaborated to help us get to the bottom of these pesky issues.

## New Features and improvements

- [K8SPXC-1088](#): It is now possible to configure CPU and memory resources for the backup restore job in the PerconaXtraDBClusterRestore Custom Resource options
- [K8SPXC-1166](#): Starting from now, Docker image tags for Percona XtraBackup include full XtraBackup version instead of the major number used before
- [K8SPXC-1189](#): Improve security and meet compliance requirements by building the Operator based on Red Hat Universal Base Image (UBI) 9 instead of UBI 8
- [K8SPXC-1192](#): Backup and restore documentation was substantially improved to make it easier to work with, and [backup restore options](#) have been added to the Custom Resource reference
- [K8SPXC-1210](#): A [headless service](#) [↗](#) can now be configured for [ProxySQL](#) and [HAProxy](#) to make them usable on a tenant network (thanks to Vishal Anarase for contribution)
- [K8SPXC-1225](#): The Operator (system) users are now created with the `PASSWORD EXPIRE NEVER` policy to avoid breaking the cluster due to the password expiration set by the `default_password_lifetime` system variable
- [K8SPXC-362](#): Code clean-up and refactoring for checking if ProxySQL and HAProxy enabled in the Custom Resource (thanks to Vladislav Safronov for contributing)
- [K8SPXC-1224](#): New `backup.allowParallel` Custom Resource option allows to disable running backup jobs in parallel, which can be useful to avoid connection issues caused by the cluster overload
- [K8SPXC-1183](#): The Operator now uses the [caching\\_sha2\\_password](#) [↗](#) authentication plugin for MySQL 8.0 instead of the older [mysql\\_native\\_password](#) [↗](#) one

## Bugs Fixed

- [K8SPXC-1179](#) and [K8SPXC-1183](#): Fix a bug due to which the Operator didn't use TLS encryption for system users
- [K8SPXC-1188](#): The database Helm chart has improved defaults, including the use of random passwords generated by the Operator, and disabling `delete-pvc` and `delete-proxysql-pvc` finalizers to avoid possible data loss during migration
- [K8SPXC-1220](#): Fix a bug due to which DNS resolution problem could force HAProxy to remove all Percona XtraDB Cluster instances, including healthy ones
- [K8SPXC-1164](#): Fix a bug which caused the Operator to recreate Secrets in case of the ProxySQL to HAProxy switch with active `delete-proxysql-pvc` finalizer
- [K8SPXC-1255](#): The log rotation was broken for the audit log, causing it to be written to the old file after the rotation
- [K8SPXC-687](#): Fix a bug which caused the backup restoration not starting in the environment which previously had a cluster with a failed restore
- [K8SPXC-835](#) and [K8SPXC-1029](#): Fix a bug which prevented using ProxySQL on the replica cluster in cross-site replication

- [K8SPXC-989](#): Fix a bug which caused on-demand (manual) backup to fail in IPv6-enabled (dual-stack) environments because of the backup script unable to figure out the proper Pod IPv4 address (thanks to Song Yang for contribution)
- [K8SPXC-1106](#): Fix a bug which caused point-in-time recovery failure in case of a corrupted binlog file in `/var/lib/mysql`
- [K8SPXC-1122](#): Fix a bug which made disabling verification of the storage server TLS certificate with `verifyTLS` PerconaXtraDBClusterRestore Custom Resource option not working
- [K8SPXC-1135](#): Fix a bug where a cluster could incorrectly get a READY status while it had a service with an external IP still in pending state
- [K8SPXC-1149](#): Fix `delete-pxc-pvc` finalizer unable to delete TLS Secret used for external communications in case if this Secret had non-customized default name
- [K8SPXC-1161](#): Fix a bug due to which PMM couldn't continue monitoring HAProxy Pods after the [PMM Server API key change](#)
- [K8SPXC-1163](#): Fix a bug that made it impossible to delete the cluster in init state in case of enabled finalizers
- [K8SPXC-1199](#): Fix a bug due to which the Operator couldn't restore backups from Azure blob storage if `spec.backupSource.azure.container` was not specified
- [K8SPXC-1205](#): Fix a bug which made the Operator to ignore the `verifyTLS` option for backups deletion caused by the `delete-s3-backup` finalizer (thanks to Christ-Jan Prinse for reporting)
- [K8SPXC-1229](#) and [K8SPXC-1197](#): Fix a bug due to which the Operator was unable to delete backups from Azure blob storage
- [K8SPXC-1236](#): Fix the pxc container entrypoint script printing passwords into the standard output
- [K8SPXC-1242](#): Fix a bug due to which the unquoted password value was passed to the pmm-admin commands, making PMM Client unable to add MySQL service
- [K8SPXC-1243](#): Fix a bug which prevented deleting PMM agent from the PMM Server inventory on Pod termination
- [K8SPXC-1126](#): Fix a bug that `pxc-db` Helm chart had PVC-based backup storage enabled by default, which could be inconvenient for the users storing backups in cloud
- [K8SPXC-1265](#): Fix a bug due to which `get pxc-backup` command could show backup as failed after the first unsuccessful attempt while backup job was continuing attempts

## Known issues and limitations

- [K8SPXC-1183](#): Switching between HAProxy and ProxySQL load balancer can't be done on existing clusters because ProxySQL does not yet support [caching\\_sha2\\_password](#) authentication plugin; this makes it necessary to choose load balancer at the cluster creation time

## Supported Platforms

The Operator was developed and tested with Percona XtraDB Cluster versions 8.0.32-24.2 and 5.7.42-31.65. Other options may also work but have not been tested. Other software components include:

- Percona XtraBackup versions 2.4.28 and 8.0.32-26
- HAProxy 2.6.12
- ProxySQL 2.5.1-1.1
- LogCollector based on fluent-bit 2.1.5
- PMM Client 2.38

The following platforms were tested and are officially supported by the Operator 1.13.0:

- [Google Kubernetes Engine \(GKE\)](#) 1.24 - 1.27
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#) 1.23 - 1.27
- [Azure Kubernetes Service \(AKS\)](#) 1.24 - 1.26
- [OpenShift](#) 4.10 - 4.13
- [Minikube](#) 1.30 (based on Kubernetes 1.27)

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.12.0

- **Date**

December 7, 2022

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

- [Azure Kubernetes Service \(AKS\)](#) is now officially supported platform, so developers and vendors of the solutions based on the Azure platform can take advantage of the official support from Percona or just use officially certified Percona Operator for MySQL images; also, [Azure Blob Storage can now be used for backups](#)
- This release also includes fixes to the following CVEs (Common Vulnerabilities and Exposures): [CVE-2021-20329](#) (potential injections in MongoDB Go Driver used HAProxy, which had no effect on Percona Operator for MySQL), and [CVE-2022-42898](#) (images used by the Operator suffering from the unauthenticated denial of service vulnerability). Users of previous Operator versions are advised to [upgrade](#) to version 1.12.0 which resolves this issue

## New Features

- [K8SPXC-1043](#) and [K8SPXC-1005](#): Add support for the [Azure Kubernetes Service \(AKS\)](#) platform and allow [using Azure Blob Storage](#) for backups
- [K8SPXC-1010](#): Allow [using templates](#) to define `innodb_buffer_pool_size` auto-tuning based on container memory limits
- [K8SPXC-1082](#): New `ignoreAnnotations` and `ignoreLabels` Custom Resource options allow to list [specific annotations and labels](#) for Kubernetes Service objects, which the Operator should ignore (useful with various Kubernetes flavors which add annotations to the objects managed by the Operator)
- [K8SPXC-1120](#): Add [headless service](#) support for the restore Pod to [make it possible](#) restoring backups from a Persistent Volume on a tenant network (thanks to Zulh for contribution)
- [K8SPXC-1140](#): The Operator now [allows using SSL channel](#) for cross-site replication (thanks to Alvaro Aguilar-Tablada Espinosa for contribution)

## Improvements

- [K8SPXC-1104](#): Starting from now, the Operator changed its API version to v1 instead of having a separate API version for each release. Three last API version are supported in addition to `v1`, which substantially reduces the size of Custom Resource Definition to prevent reaching the etcd limit
- [K8SPXC-955](#): Add Custom Resource options to set static IP-address for the [HAProxy](#) and [ProxySQL](#) LoadBalancers
- [K8SPXC-1032](#): Disable [automated upgrade](#) by default to prevent an unplanned downtime for user applications and to provide defaults more focused on strict user's control over the cluster
- [K8SPXC-1095](#): Process the SIGTERM signal to avoid unneeded lags in case of Percona XtraDB Cluster recovery or using the debug image to start up
- [K8SPXC-1113](#): Utilize dual password feature of MySQL 8 to avoid cluster restart when changing password of the `monitor` user
- [K8SPXC-1125](#): The Operator now does not attempt to start Percona Monitoring and Management (PMM) client sidecar if the corresponding secret does not contain the `pmmserver` or `pmmserverkey` key
- [K8SPXC-1153](#): Configuring the log structuring and leveling is now supported using the `LOG_STRUCTURED` and `LOG_LEVEL` environment variables. This reduces the information overload in logs, still leaving the possibility of getting more details when needed, for example, for debugging
- [K8SPXC-1123](#): Starting from now, installing the Operator for cluster-wide (multi-namespace) doesn't require to add Operator's own namespace to the list of watched namespaces (thanks to Bart Vercoulen for reporting this issue)
- [K8SPXC-1030](#): The new [delete-ssl](#) finalizer can now be used to automatically delete objects created for SSL (Secret, certificate, and issuer) in case of cluster deletion






## Bugs Fixed

- [K8SPXC-1158](#): Fix [CVE-2022-42898](#) vulnerability found in MIT krb5, which made images used by the Operator vulnerable to DoS attacks
- [K8SPXC-1028](#): Fix a bug that prevented the Operator to automatically tune `innodb_buffer_pool_size` and `innodb_buffer_pool_chunk_size` variables

- [K8SPXC-1036](#): Fix the bug that caused Liveness Probe failure when XtraBackup was running and the `wsrep_sync_wait` option was set, making the instance to be rejected from the cluster
- [K8SPXC-1065](#): Fix a bug due to which, in a pair of scheduled backups close in time, the next backup could overwrite the previous one: bucket destination was made more unique by including seconds
- [K8SPXC-1059](#): Fix a bug due to which `pxc-monit` and `proxysql-monit` containers were printing passwords in their logs (thanks to zlcnu for contribution)
- [K8SPXC-1099](#): Fix CrashLoopBackOff error caused by incorrect (non-atomic) multi-user password change
- [K8SPXC-1100](#): Fix a bug that made it impossible to use slash characters in the monitor user's password
- [K8SPXC-1118](#): Fix a bug due to which the point-in-time recovery collector only reported warnings in logs when the gaps in binlogs were found. Starting from now, such backups are marked as not suitable for consistent PITR, and [restoring them with point-in-time recovery fails](#) without manual user's intervention
- [K8SPXC-1137](#): Fix a bug that prevented adding, deleting or updating ProxySQL Service labels/annotations except at the Service creation time
- [K8SPXC-1138](#): Fix a bug due to which not enough responsive scripts for readiness and liveness Probes could be the reason of killing the overloaded database Pods

## Supported Platforms

The following platforms were tested and are officially supported by the Operator 1.12.0:

- [Google Kubernetes Engine \(GKE\)](#)  1.21 - 1.24
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.21 - 1.24
- [Azure Kubernetes Service \(AKS\)](#)  1.22 - 1.24
- [OpenShift](#)  4.10 - 4.11
- [Minikube](#)  1.28

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Operator for MySQL based on Percona XtraDB Cluster 1.11.0

- **Date**

June 3, 2022

- **Installation**

[Installing Percona Operator for MySQL based on Percona XtraDB Cluster](#)

## Release Highlights

- With this release, the Operator turns to a simplified naming convention and changes its official name to **Percona Operator for MySQL based on Percona XtraDB Cluster**
- The new [backup.backoffLimit](#) Custom Resource option allows customizing the number of attempts the Operator should make for backup
- The OpenAPI schema is now generated for the Operator, which allows Kubernetes to validate Custom Resource and protects users from occasionally applying `deploy/cr.yaml` with syntax errors

## New Features

- [K8SPXC-936](#): Allow modifying the init script via Custom Resource, which is useful for troubleshooting the Operator's issues
- [K8SPXC-758](#): Allow to [skip TLS verification for backup storage](#), useful for self-hosted S3-compatible storage with a self-signed certificate

## Improvements

- [K8SPXC-947](#): Parametrize the number of attempt the Operator should make for backup backup through a [Custom Resource option](#)
- [K8SPXC-738](#): Allow to set service labels [for HAProxy](#) and [ProxySQL](#) in Custom Resource to enable various integrations with cloud providers or service meshes
- [K8SPXC-848](#): PMM container does not cause the crash of the whole database Pod if pmm-agent is not working properly
- [K8SPXC-625](#): Print the total number of binlogs and the number of remaining binlogs in the restore log while point-in-time recovery in progress
- [K8SPXC-920](#): Using the new [Percona XtraBackup Exponential Backoff feature](#) [↗](#) decreases the number of occasional unsuccessful backups due to more effective retries timing (Thanks to Dustin Falgout for reporting this issue)
- [K8SPXC-823](#): Make it possible [to use API Key](#) to authorize within Percona Monitoring and Management Server

## Bugs Fixed

- [K8SPXC-985](#): Fix a bug that caused point-in-time recovery to fail due to incorrect binlog filtering logic
- [K8SPXC-899](#): Fix a bug due to which issued certificates didn't cover all hostnames, making `VERIFY_IDENTITY` client mode not working with HAProxy
- [K8SPXC-750](#): Fix a bug that prevented ProxySQL from connecting to Percona XtraDB Cluster after turning TLS off
- [K8SPXC-896](#): Fix a bug due to which the Operator was unable to create `ssl-internal` Secret if crash happened in the middle of a reconcile and restart (Thanks to srteam2020 for contribution)
- [K8SPXC-725](#) and [K8SPXC-763](#): Fix a bug due to which ProxySQL StatefulSet, and Services were mistakenly deleted by the Operator when reading stale ProxySQL or HAProxy information (Thanks to srteam2020 for contribution)
- [K8SPXC-957](#): Fix a bug due to which `pxc-db` Helm chart didn't support setting the `replicasServiceType` Custom Resource option (Thanks to Carlos Martell for reporting this issue)
- [K8SPXC-534](#): Fix a bug that caused some SQL queries to fail during the pxc StatefulSet update (Thanks to Sergiy Prykhodko for reporting this issue)
- [K8SPXC-1016](#): Fix a bug due to which an empty SSL secret name in Custom Resource caused the Operator to throw a misleading error message in the log
- [K8SPXC-994](#): Don't use root user in MySQL Pods to perform checks during cluster restoration, which may be helpful when restoring from non-Kubernetes environments





- [K8SPXC-961](#): Fix a bug due to which a user-defined sidecar container image in the Operator Pod could be treated as the initImage (Thanks to Carlos Martell for reporting this issue)
- [K8SPXC-934](#): Fix a bug due to which the the cluster was not starting as Operator didn't create the users Secret if the `secretsName` option was absent in `cr.yaml`
- [K8SPXC-926](#): Fix a bug due to which failed Smart Update for one cluster in cluster-wide made the Operator unusable for other clusters
- [K8SPXC-900](#): Fix a bug where ProxySQL could not apply new configuration settings
- [K8SPXC-862](#): Fix a bug due to which changing resources as integer values without quotes in Custom Resource could lead to cluster getting stuck
- [K8SPXC-858](#): Fix a bug which could cause a single-node cluster to jump temporarily into the Error status during the upgrade
- [K8SPXC-814](#): Fix a bug when Custom Resource status was missing due to invalid variable setting in the manifest

## Deprecation, Rename and Removal

- [K8SPXC-823](#): Password-based authorization to Percona Monitoring and Management Server is now deprecated and will be removed in future releases in favor of a token-based one. Password-based authorization was used by the Operator before this release to provide MySQL monitoring, but now using the API Key [is the recommended authorization method](#)

## Supported Platforms

The following platforms were tested and are officially supported by the Operator 1.11.0:

- [OpenShift](#)  4.7 - 4.10
- [Google Kubernetes Engine \(GKE\)](#)  1.20 - 1.23
- [Amazon Elastic Container Service for Kubernetes \(EKS\)](#)  1.20 - 1.22
- [Minikube](#)  1.23

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.



# Percona Distribution for MySQL Operator 1.10.0

- **Date**

November 24, 2021

- **Installation**

For installation please refer to [the documentation page](#)

## Release Highlights

- [Custom sidecar containers](#) allow users to customize Percona XtraDB Cluster and other Operator components without changing the container images. In this release, we enable even more customization, by allowing users to mount volumes into the sidecar containers.
- In this release, we put a lot of effort into fixing bugs that were reported by the community. We appreciate everyone who helped us with discovering these issues and contributed to the fixes.

## New Features

- [K8SPXC-856](#): Mount volumes into sidecar containers to enable customization (Thanks to Sridhar L for contributing)

## Improvements

- [K8SPXC-771](#): `spec.Backup.serviceAccount` and `spec.automountServiceAccountToken` Custom Resource options can now be used in the Helm chart (Thanks to Gerwin van de Steeg for reporting this issue)
- [K8SPXC-794](#): The `logrotate` command now doesn't use verbose mode to avoid flooding the log with rotate information
- [K8SPXC-793](#): Logs are now strictly following JSON specification to simplify parsing
- [K8SPXC-789](#): New `source_retry_count` and `source_connect_retry` options were added to tune source retries for replication between two clusters
- [K8SPXC-588](#): New `replicasServiceEnabled` option was added to allow disabling the Kubernetes Service for `haproxy-replicas`, which may be useful to avoid the unwanted forwarding of the application write requests to all Percona XtraDB Cluster instances
- [K8SPXC-822](#): Logrotate now doesn't rotate GRA logs (binlog events in ROW format representing the failed transaction) as ordinary log files, storing them for 7 days instead which gives additional time to debug the problem

## Bugs Fixed

- [K8SPXC-761](#): Fixed a bug where HAProxy container was not setting explicit USER id, being incompatible with the `runAsNonRoot` security policy (Thanks to Henno Schooljan for reporting this issue)
- [K8SPXC-894](#): Fixed a bug where trailing white spaces in the `pmm-admin add` command caused reconcile loop on OpenShift
- [K8SPXC-831](#): Fixed a bug that made it possible to have a split-brain situation, when two nodes were starting their own cluster in case of a DNS failure
- [K8SPXC-796](#): Fixed a bug due to which S3 backup deletion didn't delete Pods attached to the backup job if the S3 finalizer was set (Thanks to Ben Langfeld for reporting this issue)
- [K8SPXC-876](#): Stopped using the `service.alpha.kubernetes.io/tolerate-unready-endpoints` deprecated Kubernetes option in the `$(clustername)-pxc-unready` service annotation (Thanks to Antoine Habran for reporting this issue)
- [K8SPXC-842](#): Fixed a bug where backup finalizer didn't delete data from S3 if the backup path contained a folder inside of the S3 bucket (Thanks to for reporting this issue)
- [K8SPXC-812](#): Fix a bug due to which the Operator didn't support cert-manager versions since v0.14.0 (Thanks to Ben Langfeld for reporting this issue)
- [K8SPXC-762](#): Fix a bug due to which the validating webhook was not accepting scale operation in the Operator cluster-wide mode (Thanks to Henno Schooljan for reporting this issue)
- [K8SPXC-893](#): Fix a bug where HAProxy service failed during the config validation check if there was a resolution fail with one of the PXC addresses
- [K8SPXC-871](#): Fix a bug that prevented removing a Percona XtraDB Cluster manual backup for PVC storage
- [K8SPXC-851](#): Fixed a bug where changing replication user password didn't work

- [K8SPXC-850](#): Fixed a bug where the default weight value wasn't set for a host in a replication channel
- [K8SPXC-845](#): Fixed a bug where using malformed cr.yaml caused stuck cases in cluster deletion
- [K8SPXC-838](#): Fixed a bug due to which the Log Collector and PMM containers with unspecified memory and CPU requests were inheriting them from the PXC container
- [K8SPXC-824](#): Cluster may get into an unrecoverable state with incomplete full crash
- [K8SPXC-818](#): Fixed a bug which made Pods with a custom config inside a Secret or a ConfigMap not restarting at config update
- [K8SPXC-783](#): Fixed a bug where the root user was able to modify the monitor and clustercheck system users, making the possibility of cluster failure or misbehavior

## Supported Platforms

The following platforms were tested and are officially supported by the Operator 1.10.0:

- OpenShift 4.7 - 4.9
- Google Kubernetes Engine (GKE) 1.19 - 1.22
- Amazon Elastic Kubernetes Service (EKS) 1.17 - 1.21
- Minikube 1.22

This list only includes the platforms that the Percona Operators are specifically tested on as part of the release process. Other Kubernetes flavors and versions depend on the backward compatibility offered by Kubernetes itself.

# Percona Distribution for MySQL Operator 1.9.0

- **Date**

August 9, 2021

- **Installation**

For installation please refer to [the documentation page](#)

## Release Highlights

- Starting from this release, the Operator changes its official name to **Percona Distribution for MySQL Operator**. This new name emphasizes gradual changes which incorporated a collection of Percona's solutions to run and operate Percona Server for MySQL and Percona XtraDB Cluster, available separately as [Percona Distribution for MySQL](#).
- Now you can [see HAProxy metrics](#) in your favorite Percona Monitoring and Management (PMM) dashboards automatically.
- The [cross-site replication](#) feature allows an asynchronous replication between two Percona XtraDB Clusters, including scenarios when one of the clusters is outside of the Kubernetes environment. The feature is intended for the following use cases:
  - provide migrations of your Percona XtraDB Cluster to Kubernetes or vice versa,
  - migrate regular MySQL database to Percona XtraDB Cluster under the Operator control, or carry on backward migration,
  - enable disaster recovery capability for your cluster deployment.

## New Features

- [K8SPXC-657](#): Use Secrets to store custom configuration with sensitive data for [Percona XtraDB Cluster](#), [HAProxy](#), and [ProxySQL](#) Pods
- [K8SPXC-308](#): Implement Percona XtraDB Cluster [asynchronous replication](#) within the Operator
- [K8SPXC-688](#): Define [environment variables](#) in the Custom Resource to provide containers with additional customizations

## Improvements

- [K8SPXC-673](#): HAProxy Pods now come with Percona Monitoring and Management integration and support
- [K8SPXC-791](#): Allow [stopping the restart-on-fail loop](#) for Percona XtraDB Cluster and Log Collector Pods without special debug images
- [K8SPXC-764](#): Unblock backups even if just a single instance is available by setting the `allowUnsafeConfigurations` flag to true
- [K8SPXC-765](#): Automatically delete custom configuration ConfigMaps if the variable in Custom Resource was unset (Thanks to Oleksandr Levchenkov for contributing)
- [K8SPXC-734](#): Simplify manual recovery by automatically getting Percona XtraDB Cluster namespace in the pxc container entrypoint script (Thanks to Michael Lin for contributing)
- [K8SPXC-656](#): `imagePullPolicy` is now set for init container as well to avoid pulling and simplifying deployments in air-gapped environments (Thanks to Herberto Graça for contributing)
- [K8SPXC-511](#): Secret object containing system users passwords is now deleted along with the Cluster if `delete-pxc-pvc` finalizer is enabled (Thanks to Matthias Baur for contributing)
- [K8SPXC-772](#): All Service objects now have Percona XtraDB Cluster labels attached to them to enable label selector usage
- [K8SPXC-731](#): It is now possible to see the overall progress of the provisioning of Percona XtraDB Cluster resources and dependent components in Custom Resource status
- [K8SPXC-730](#): Percona XtraDB Cluster resource statuses in Custom Resource output (e.g. returned by `kubectl get pxc` command) have been improved and now provide more precise reporting
- [K8SPXC-697](#): Add namespace support in the `copy-backup` script
- [K8SPXC-321](#), [K8SPXC-556](#), [K8SPXC-568](#): Restrict the minimal number of ProxySQL and HAProxy Pods and the maximal number of Percona XtraDB Cluster Pods if the unsafe flag is not set
- [K8SPXC-554](#): Reduced the number of various etcd and k8s object updates from the Operator to minimize the pressure on the Kubernetes cluster

- [K8SPXC-421](#): It is now possible to [use X Plugin](#) with Percona XtraDB Cluster Pods

## Known Issues and Limitations

- [K8SPXC-835](#): ProxySQL will fail to start on a Replica Percona XtraDB Cluster for cross-site replication in this release

## Bugs Fixed

- [K8SPXC-757](#): Fixed a bug where manual crash recovery interfered with auto recovery functionality even with the `auto_recovery` flag set to false
- [K8SPXC-706](#): TLS certificates [renewal by a cert-manager was failing](#) (Thanks to Jeff Andrews for reporting this issue)
- [K8SPXC-785](#): Fixed a bug where backup to S3 was producing false-positive error messages even if backup was successful
- [K8SPXC-642](#): Fixed a bug where PodDisruptionBudget was blocking the upgrade of HAProxy (Thanks to Davi S Evangelista for reporting this issue)
- [K8SPXC-585](#): Fixed a bug where the Operator got stuck if the wrong user credentials were set in the Secret object (Thanks to Sergiy Prykhodko for reporting this issue)
- [K8SPXC-756](#): Fixed a bug where the Operator was scheduling backups even when the cluster was paused (Thanks to Dmytro for reporting this issue)
- [K8SPXC-813](#): Fixed a bug where backup restore didn't return error on incorrect AWS credentials
- [K8SPXC-805](#): Fixed a bug that made pxc-backups object deletion hang if the Operator couldn't list objects from the S3 bucket (e.g. due to wrong S3 credentials)
- [K8SPXC-787](#): Fixed the "initializing" status of ready clusters caused by the xtrabackup user password change
- [K8SPXC-775](#): Fixed a bug where errors in custom mysqld config settings were not detected by the Operator if the config was modified after the initial cluster was created
- [K8SPXC-767](#): Fixed a bug where on-demand backup hung up if created while the cluster was in the "initializing" state
- [K8SPXC-726](#): Fixed a bug where the `delete-s3-backup` finalizer prevented deleting a backup stored on Persistent Volume
- [K8SPXC-682](#): Fixed auto-tuning feature setting wrong `innodb_buffer_pool_size` value in some cases

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.8.0

- **Date**

April 26, 2021

- **Installation**

[Installing Percona Kubernetes Operator for Percona XtraDB Cluster](#)

## Release Highlights

- It is now [possible](#) to use `kubectl scale` command to scale Percona XtraDB Cluster horizontally (add or remove Replica Set instances). You can also use [Horizontal Pod Autoscaler](#) [↗](#) which will scale your database cluster based on various metrics, such as CPU utilization.
- Support for [custom sidecar containers](#). The Operator makes it possible now to deploy additional (sidecar) containers to the Pod. This feature can be useful to run debugging tools or some specific monitoring solutions, etc. Sidecar containers can be added to [pxc](#), [haproxy](#), and [proxysql](#) sections of the `deploy/cr.yaml` configuration file.

## New Features

- [K8SPXC-528](#): Support for [custom sidecar containers](#) to extend the Operator capabilities
- [K8SPXC-647](#): Allow the cluster [scale in and scale out](#) with the `kubectl scale` command or Horizontal Pod Autoscaler
- [K8SPXC-643](#): Operator can now automatically recover Percona XtraDB Cluster after the [network partitioning](#) [↗](#)

## Improvements

- [K8SPXC-442](#): The Operator can now automatically remove old backups from S3 storage if the retention period is set (thanks to Davi S Evangelista for reporting this issue)
- [K8SPXC-697](#): Add namespace support in the [script used to copy backups](#) from remote storage to a local machine
- [K8SPXC-627](#): Point-in-time recovery uploader now chooses the Pod with the oldest binary log in the cluster to ensure log consistency
- [K8SPXC-618](#): Add debug symbols from the [percona-xtradb-cluster-server-debuginfo](#) [↗](#) package to the Percona XtraDB Cluster debug docker image to simplify troubleshooting
- [K8SPXC-599](#): It is now possible to [recover](#) databases up to a specific transaction with the Point-in-time Recovery feature. Previously the user could only recover to specific date and time
- [K8SPXC-598](#): Point-in-time recovery feature now works with compressed backups
- [K8SPXC-536](#): It is now possible to explicitly set the version of Percona XtraDB Cluster for newly provisioned clusters. Before that, all new clusters were started with the latest PXC version if Version Service was enabled
- [K8SPXC-522](#): Add support for the `runtimeClassName` Kubernetes feature for selecting the container runtime
- [K8SPXC-519](#), [K8SPXC-558](#), and [K8SPXC-637](#): Various improvements of Operator log messages

## Known Issues and Limitations

- [K8SPXC-701](#): Scheduled backups are not compatible with Kubernetes 1.20 in cluster-wide mode.

## Bugs Fixed

- [K8SPXC-654](#): Use MySQL administrative port for Kubernetes liveness/readiness probes to avoid false positive failures
- [K8SPXC-614](#), [K8SPXC-619](#), [K8SPXC-545](#), [K8SPXC-641](#), [K8SPXC-576](#): Fix multiple bugs due to which changes of various objects in `deploy/cr.yaml` were not applied to the running cluster (thanks to Sergiy Prykhodko for reporting some of these issues)
- [K8SPXC-596](#): Fix a bug due to which liveness probe for `pxc` container could cause zombie processes

- [K8SPXC-632](#): Fix a bug preventing point-in-time recovery when multiple clusters were uploading binary logs to a single S3 bucket
- [K8SPXC-573](#): Fix a bug that prevented using special characters in XtraBackup password (thanks to Gertjan Bijl for reporting this issue)
- [K8SPXC-571](#): Fix a bug where Percona XtraDB Cluster went into a desynced state at backup job crash (Thanks to Dimitrij Hilt for reporting this issue)
- [K8SPXC-430](#): Galera Arbitrator used for backups does not break the cluster anymore in various cases
- [K8SPXC-684](#): Fix a bug due to which point-in-time recovery backup didn't allow specifying the `endpointUrl` for Amazon S3 storage
- [K8SPXC-681](#): Fix operator crash which occurred when non-existing storage name was specified for point-in-time recovery
- [K8SPXC-638](#): Fix unneeded delay in showing logs with the `kubect1 logs` command for the logs container
- [K8SPXC-609](#): Fix frequent HAProxy service NodePort updates which were causing issues with load balancers
- [K8SPXC-542](#): Fix a bug due to which backups were taken only for one cluster out of many controlled by one Operator
- [CLOUD-611](#): Stop using the already deprecated runtime/scheme package (Thanks to Jerome Küttner for reporting this issue)

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.7.0

- **Date**

February 2, 2021

- **Installation**

[Installing Percona Kubernetes Operator for Percona XtraDB Cluster](#)

## New Features

- [K8SPXC-530](#): Add support for [point-in-time recovery](#)
- [K8SPXC-564](#): PXC cluster will now recover automatically from a full crash when Pods are stuck in CrashLoopBackOff status
- [K8SPXC-497](#): Official support for [Percona Monitoring and Management \(PMM\) v.2](#)

**NOTE:** Monitoring with PMM v.1 configured according to the [unofficial instruction](#) [↗](#) will not work after the upgrade. Please switch to PMM v.2.

## Improvements

- [K8SPXC-485](#): [Percona XtraDB Cluster Pod logs are now stored on Persistent Volumes](#). Users can debug the issues even after the Pod restart
- [K8SPXC-389](#): User can now change ServiceType for HAProxy replicas Kubernetes service
- [K8SPXC-546](#): Reduce the number of ConfigMap object updates from the Operator to improve performance of the Kubernetes cluster
- [K8SPXC-553](#): Change default configuration of ProxySQL to WRITERS\_ARE\_READERS=yes so Percona XtraDB Cluster continues operating with a single node left
- [K8SPXC-512](#): User can now limit cluster-wide Operator access to specific namespaces (Thanks to user mgar for contribution)
- [K8SPXC-490](#): Improve error message when not enough memory is set for auto-tuning
- [K8SPXC-312](#): Add schema validation for Custom Resource. Now `cr.yaml` is validated by a WebHook for syntax typos before being applied. It works only in cluster-wide mode due to access restrictions
- [K8SPXC-510](#): Percona XtraDB Cluster operator can now be [deployed through RedHat Marketplace](#) [↗](#)
- [K8SPXC-543](#): Check HAProxy custom configuration for syntax errors before applying it to avoid Pod getting stuck in CrashLoopBackOff status (Thanks to user pservit for reporting this issue)

## Bugs Fixed

- [K8SPXC-544](#): Add a liveness probe for HAProxy so it is not stuck and automatically restarted when crashed (Thanks to user pservit for reporting this issue)
- [K8SPXC-500](#): Fix a bug that prevented creating a backup in cluster-wide mode if default cr.yaml is used (Thanks to user michael.lin1 for reporting this issue)
- [K8SPXC-491](#): Fix a bug due to which compressed backups didn't work with the Operator (Thanks to user dejw for reporting this issue)
- [K8SPXC-570](#): Fix a bug causing backups to fail with some S3-compatible storages (Thanks to user dimitrij for reporting this issue)
- [K8SPXC-517](#): Fix a bug causing Operator crash if Custom Resource backup section is missing (Thanks to user deamonmv for reporting this issue)
- [K8SPXC-253](#): Fix a bug preventing rolling out Custom Resource changes (Thanks to user bitsbeats for reporting this issue)
- [K8SPXC-552](#): Fix a bug when HAProxy secrets cannot be updated by the user
- [K8SPXC-551](#): Fix a bug due to which cluster was not initialized when the password had an end of line symbol in `secret.yaml`
- [K8SPXC-526](#): Fix a bug due to which not all clusters managed by the Operator were upgraded by the automatic update
- [K8SPXC-523](#): Fix a bug putting cluster into unhealthy status after the clustercheck secret changed
- [K8SPXC-521](#): Fix automatic upgrade job repeatedly looking for an already removed cluster
- [K8SPXC-520](#): Fix Smart update in cluster-wide mode adding version service check job repeatedly instead of doing it only once
- [K8SPXC-463](#): Fix a bug due to which wsrep\_recovery log was unavailable after the Pod restart
- [K8SPXC-424](#): Fix a bug due to which HAProxy health-check spammed in logs, making them hardly unreadable

- [K8SPXC-379](#): Fix a bug due to which the Operator user credentials were not added into internal secrets when upgrading from 1.4.0 (Thanks to user pservit for reporting this issue)



# Percona Kubernetes Operator for Percona XtraDB Cluster 1.6.0

- **Date**

October 9, 2020

- **Installation**

[Installing Percona Kubernetes Operator for Percona XtraDB Cluster](#)

## New Features

- [K8SPXC-394](#): Support of “[cluster-wide](#)” [mode](#) for Percona XtraDB Cluster Operator
- [K8SPXC-416](#): [Support of the proxy-protocol](#) in HAProxy (to use this feature, you should have a Percona XtraDB Cluster image version `8.0.21` or newer)
- [K8SPXC-429](#): A possibility to [restore backups to a new Kubernetes-based environment](#) with no existing Percona XtraDB Cluster Custom Resource
- [K8SPXC-343](#): Helm chart [officially provided with the Operator](#)

## Improvements

- [K8SPXC-144](#): Allow [adding ProxySQL configuration options](#)
- [K8SPXC-398](#): New `crVersion` key in `deploy/cr.yaml` to indicate the API version that the Custom Resource corresponds to (thanks to user [mike.saah](#) for contribution)
- [K8SPXC-474](#): The init container now has the same resource requests as the main container of a correspondent Pod (thanks to user [yann.leenhardt](#) for contribution)
- [K8SPXC-372](#): Support new versions of cert-manager by the Operator (thanks to user [rf\\_enigm](#) for contribution)
- [K8SPXC-317](#): Possibility to configure the `imagePullPolicy` Operator option (thanks to user [imranrazakhan](#) for contribution)
- [K8SPXC-462](#): Add readiness probe for HAProxy
- [K8SPXC-411](#): Extend cert-manager configuration to add additional domains (multiple SAN) to a certificate
- [K8SPXC-375](#): Improve HAProxy behavior in case of switching writer node to a new one and back
- [K8SPXC-368](#): Autoupdate system users by changing the appropriate Secret name

## Known Issues and Limitations

- OpenShift 3.11 requires additional configuration for the correct HAProxy operation: the feature gate `PodShareProcessNamespace` should be set to `true`. If getting it enabled is not possible, we recommend using ProxySQL instead of HAProxy with OpenShift 3.11. Other OpenShift and Kubernetes versions are not affected.
- [K8SPXC-491](#): Compressed backups are not compatible with the Operator 1.6.0 (`percona/percona-xtradb-cluster-operator:1.5.0-pxc8.0-backup` or `percona/percona-xtradb-cluster-operator:1.5.0-pxc5.7-backup` image can be used as a workaround if needed).

## Bugs Fixed

- [K8SPXC-431](#): HAProxy unable to start on OpenShift with the default `cr.yaml` file
- [K8SPXC-408](#): Insufficient `MAX_USER_CONNECTIONS=10` for ProxySQL monitor user (increased to 100)
- [K8SPXC-391](#): HAProxy and PMM cannot be enabled at the same time (thanks to user [rf\\_enigm](#) for reporting this issue)
- [K8SPXC-406](#): Second node (XXX-pxc-1) always selected as a donor (thanks to user [pservit](#) for reporting this issue)
- [K8SPXC-390](#): Crash on missing HAProxy PodDisruptionBudget
- [K8SPXC-355](#): Counterintuitive YYYY-DD-MM dates in the S3 backup folder names (thanks to user [graham-web](#) for contribution)
- [K8SPXC-305](#): ProxySQL not working in case of passwords with a `%` symbol in the Secrets object (thanks to user [ben.wilson](#) for reporting this issue)

- [K8SPXC-278](#): ProxySQL never getting ready status in some environments after the cluster launch due to the `proxysql-monit` Pod crash (thanks to user lots0logs for contribution)
- [K8SPXC-274](#): The 1.2.0 -> 1.3.0 -> 1.4.0 upgrade path not working (thanks to user martin.atroo for reporting this issue)
- [K8SPXC-476](#): SmartUpdate failing to fetch version from Version Service in case of incorrectly formatted Percona XtraDB Cluster patch version higher than the last known one
- [K8SPXC-454](#): After the cluster creation, pxc-0 Pod restarting due to Operator not waiting for cert-manager to issue requested certificates (thanks to user mike.saah for reporting this issue)
- [K8SPXC-450](#): TLS annotations causing unnecessary HAProxy Pod restarts
- [K8SPXC-443](#) and [K8SPXC-456](#): The outdated version service endpoint URL (fix with preserving backward compatibility)
- [K8SPXC-435](#): MySQL root password visible through `kubectl logs`
- [K8SPXC-426](#): mysqld recovery logs not logged to file and not available through `kubectl logs`
- [K8SPXC-423](#): HAProxy not refreshing IP addresses even when the node gets a different address
- [K8SPXC-419](#): Percona XtraDB Cluster incremental state transfers not taken into account by readiness/liveness checks
- [K8SPXC-418](#): HAProxy not routing traffic for 1 donor, 2 joiners
- [K8SPXC-417](#): Cert-manager not compatible with Kubernetes versions below v1.15 due to unnecessarily high API version demand
- [K8SPXC-384](#): Debug images were not fully functional for the latest version of the Operator because of having no infinity loop
- [K8SPXC-383](#): DNS warnings in PXC Pods when using HAProxy
- [K8SPXC-364](#): Smart Updates showing empty "from" versions for non-PXC objects in logs
- [K8SPXC-379](#): The Operator user credentials not added into internal secrets when upgrading from 1.4.0 (thanks to user pservit for reporting this issue)

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.5.0

- **Date**

July 21, 2020

- **Installation**

[Installing Percona Kubernetes Operator for Percona XtraDB Cluster](#)

## New Features

- [K8SPXC-298](#): Automatic synchronization of MySQL users with ProxySQL
- [K8SPXC-294](#): HAProxy Support
- [K8SPXC-284](#): Fully automated minor version updates (Smart Update)
- [K8SPXC-257](#): Update Reader members before Writer member at cluster upgrades
- [K8SPXC-256](#): Support multiple PXC minor versions by the Operator

## Improvements

- [K8SPXC-290](#): Extend usable backup schedule syntax to include lists of values
- [K8SPXC-309](#): Quickstart Guide on Google Kubernetes Engine (GKE) - [link](#)
- [K8SPXC-288](#): Quickstart Guide on Amazon Elastic Kubernetes Service (EKS) - [link](#)
- [K8SPXC-280](#): Support XtraBackup compression
- [K8SPXC-279](#): Use SYSTEM\_USER privilege for system users on PXC 8.0
- [K8SPXC-277](#): Install GDB in PXC images
- [K8SPXC-276](#): Pod-0 should be selected as Writer if possible
- [K8SPXC-252](#): Automatically manage system users for MySQL and ProxySQL on password rotation via Secret
- [K8SPXC-242](#): Improve internal backup implementation for better stability with PXC 8.0
- [CLOUD-404](#): Support of loadBalancerSourceRanges for LoadBalancer Services
- [CLOUD-556](#): Kubernetes 1.17 added to the list of supported platforms

## Bugs Fixed

- [K8SPXC-327](#): CrashloopBackOff if PXC 8.0 Pod restarts in the middle of SST
- [K8SPXC-291](#): PXC Restore failure with “The node was low on resource: ephemeral-storage” error (Thanks to user rjeka for reporting this issue)
- [K8SPXC-270](#): Restore job wiping data from the original backup’s cluster when restoring to another cluster in the same namespace
- [K8SPXC-352](#): Backup cronjob not scheduled in some Kubernetes environments (Thanks to user msavchenko for reporting this issue)
- [K8SPXC-275](#): Outdated documentation on the Operator updates (Thanks to user martin.atroo for reporting this issue)
- [K8SPXC-347](#): XtraBackup failure after uploading a backup, causing the backup process restart in some cases (Thanks to user connde for reporting this issue)
- [K8SPXC-373](#): Pod not cleaning up the SST tmp dir on start
- [K8SPXC-326](#): Changes in TLS Secrets not triggering PXC restart if AllowUnsafeConfig enabled
- [K8SPXC-323](#): Missing `tar` utility in the PXC node docker image
- [CLOUD-531](#): Wrong usage of `strings.TrimLeft` when processing apiVersion
- [CLOUD-474](#): Cluster creation not failing if wrong resources are set

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.4.0

- **Date**

April 29, 2020

- **Installation**

[Installing Percona Kubernetes Operator for Percona XtraDB Cluster](#)

## New Features

- [K8SPXC-172](#): Full data-at-rest encryption available in PXC 8.0 is now supported by the Operator. This feature is implemented with the help of the `keyring_vault` plugin which ships with PXC 8.0. By utilizing [Vault](#) we enable our customers to follow best practices with encryption in their environment.
- [K8SPXC-125](#): Percona XtraDB Cluster 8.0 is now supported
- [K8SPXC-95](#): Amazon Elastic Container Service for Kubernetes (EKS) was added to the list of the officially supported platforms
- The OpenShift Container Platform 4.3 is now supported

## Improvements

- [K8SPXC-262](#): The Operator allows setting ephemeral-storage requests and limits on all Pods
- [K8SPXC-221](#): The Operator now updates observedGeneration status message to allow better monitoring of the cluster rollout or backup/restore process
- [K8SPXC-213](#): A special [PXC debug image](#) is now available. It avoids restarting on fail and contains additional tools useful for debugging
- [K8SPXC-100](#): The Operator now implements the crash tolerance on the one member crash. The implementation is based on starting Pods with `mysqld --wsrep_recover` command if there was no graceful shutdown

## Bugs Fixed

- [K8SPXC-153](#): S3 protocol credentials were not masked in logs during the PXC backup & restore process
- [K8SPXC-222](#): The Operator got caught in reconciliation error in case of the erroneous/absent API version in the `deploy/cr.yaml` file
- [K8SPXC-261](#): ProxySQL logs were showing the root password
- [K8SPXC-220](#): The inability to update or delete existing CRD was possible because of too large records in etcd, resulting in "request is too large" errors. Only 20 last status changes are now stored in etcd to avoid this problem.
- [K8SPXC-52](#): The Operator produced an unclear error message in case of fail caused by the absent or malformed pxc section in the `deploy/cr.yaml` file
- [K8SPXC-269](#): The `copy-backup.sh` script didn't work correctly in case of an existing secret with the `AWS_ACCESS_KEY_ID/AWS_SECRET_ACCESS_KEY` credentials and prevented users from copying backups (e.g. to a local machine)
- [K8SPXC-263](#): The `kubect1 get pxc` command was unable to show the correct ProxySQL external endpoint
- [K8SPXC-219](#): PXC Helm charts were incompatible with the version 3 of the Helm package manager
- [K8SPXC-40](#): The cluster was unable to reach "ready" status in case if `ProxySQL.Enabled` field was set to `false`
- [K8SPXC-34](#): Change of the `proxysql.servicetype` field was not detected by the Operator and thus had no effect

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.3.0

Percona announces the *Percona Kubernetes Operator for Percona XtraDB Cluster* 1.3.0 release on January 6, 2020. This release is now the current GA release in the 1.3 series. [Install the Kubernetes Operator for Percona XtraDB Cluster by following the instructions.](#)

The Percona Kubernetes Operator for Percona XtraDB Cluster automates the lifecycle and provides a consistent Percona XtraDB Cluster instance. The Operator can be used to create a Percona XtraDB Cluster, or scale an existing Cluster and contains the necessary Kubernetes settings.

The Operator simplifies the deployment and management of the [Percona XtraDB Cluster](#) in Kubernetes-based environments. It extends the Kubernetes API with a new custom resource for deploying, configuring and managing the application through the whole life cycle.

The Operator source code is available [in our Github repository](#). All of Percona's software is open-source and free.

## New features and improvements:

- [CLOUD-412](#): Auto-Tuning of the MySQL Parameters based on Pod memory resources was implemented in the case of Percona XtraDB Cluster Pod limits (or at least Pod requests) specified in the cr.yaml file.
- [CLOUD-411](#): Now the user can adjust securityContext, replacing the automatically generated securityContext with the customized one.
- [CLOUD-394](#): The Percona XtraDB Cluster, ProxySQL, and backup images size decrease by 40-60% was achieved by removing unnecessary dependencies and modules to reduce the cluster deployment time.
- [CLOUD-390](#): Helm chart for Percona Monitoring and Management (PMM) 2.0 has been provided.
- [CLOUD-383](#): Affinity constraints and tolerations were added to the backup Pod
- [CLOUD-430](#): Image URL in the CronJob Pod template is automatically updated when the Operator detects changed backup image URL

## Fixed bugs:

- [CLOUD-462](#): Resource requests/limits were set not for all containers in a ProxySQL Pod
- [CLOUD-437](#): Percona Monitoring and Management Client was taking resources definition from the Percona XtraDB Cluster despite having much lower need in resources, particularly lower memory footprint.
- [CLOUD-434](#): Restoring Percona XtraDB Cluster was failing on the OpenShift platform with customized security settings
- [CLOUD-399](#): The iptutils package was added to the backup docker image to provide backup jobs with the ping command for a better network connection handling
- [CLOUD-393](#): The Operator generated various StatefulSets in the first reconciliation cycle and in all subsequent reconciliation cycles, causing Kubernetes to trigger an unnecessary ProxySQL restart once during the cluster creation.
- [CLOUD-376](#): A long-running SST caused the liveness probe check to fail it's grace period timeout, resulting in an unrecoverable failure
- [CLOUD-243](#): Using MYSQL\_ROOT\_PASSWORD with special characters in a ProxySQL docker image was breaking the entrypoint initialization process

[Percona XtraDB Cluster](#) is an open source, cost-effective and robust clustering solution for businesses. It integrates Percona Server for MySQL with the Galera replication library to produce a highly-available and scalable MySQL® cluster complete with synchronous multi-primary replication, zero data loss and automatic node provisioning using Percona XtraBackup.

Help us improve our software quality by reporting any bugs you encounter using [our bug tracking system](#).

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.2.0

Percona announces the *Percona Kubernetes Operator for Percona XtraDB Cluster 1.2.0* release on September 20, 2019. This release is now the current GA release in the 1.2 series. [Install the Kubernetes Operator for Percona XtraDB Cluster by following the instructions.](#)

The Percona Kubernetes Operator for Percona XtraDB Cluster automates the lifecycle and provides a consistent Percona XtraDB Cluster instance. The Operator can be used to create a Percona XtraDB Cluster, or scale an existing Cluster and contains the necessary Kubernetes settings.

The Operator simplifies the deployment and management of the [Percona XtraDB Cluster](#) in Kubernetes-based environments. It extends the Kubernetes API with a new custom resource for deploying, configuring and managing the application through the whole life cycle.

The Operator source code is available [in our Github repository](#). All of Percona's software is open-source and free.

## New features and improvements:

- A Service Broker was implemented for the Operator, allowing a user to deploy Percona XtraDB Cluster on the OpenShift Platform, configuring it with a standard GUI, following the Open Service Broker API.
- Now the Operator supports [Percona Monitoring and Management 2](#), which means being able to detect and register to PMM Server of both 1.x and 2.0 versions.
- A `NodeSelector` constraint is now supported for the backups, which allows using backup storage accessible to a limited set of nodes only (contributed by [Chen Min](#)).
- The resource constraint values were refined for all containers to eliminate the possibility of an out of memory error.
- Now it is possible to set the `schedulerName` option in the operator parameters. This allows using storage which depends on a custom scheduler, or a cloud provider which optimizes scheduling to run workloads in a cost-effective way (contributed by [Smaine Kahlouch](#)).
- A bug was fixed, which made cluster status oscillate between "initializing" and "ready" after an update.
- A 90 second startup delay which took place on freshly deployed Percona XtraDB Cluster was eliminated.

[Percona XtraDB Cluster](#) is an open source, cost-effective and robust clustering solution for businesses. It integrates Percona Server for MySQL with the Galera replication library to produce a highly-available and scalable MySQL® cluster complete with synchronous multi-primary replication, zero data loss and automatic node provisioning using Percona XtraBackup.

Help us improve our software quality by reporting any bugs you encounter using [our bug tracking system](#).

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.1.0

Percona announces the general availability of *Percona Kubernetes Operator for Percona XtraDB Cluster 1.1.0* on July 15, 2019. This release is now the current GA release in the 1.1 series. [Install the Kubernetes Operator for Percona XtraDB Cluster by following the instructions.](#)

The Percona Kubernetes Operator for Percona XtraDB Cluster automates the lifecycle and provides a consistent Percona XtraDB Cluster instance. The Operator can be used to create a Percona XtraDB Cluster, or scale an existing Cluster and contains the necessary Kubernetes settings.

The Operator simplifies the deployment and management of the [Percona XtraDB Cluster](#) in Kubernetes-based environments. It extends the Kubernetes API with a new custom resource for deploying, configuring and managing the application through the whole life cycle.

The Operator source code is available [in our Github repository](#). All of Percona's software is open-source and free.


## New features and improvements:

- Now the Percona Kubernetes Operator [allows upgrading](#) Percona XtraDB Cluster to newer versions, either in semi-automatic or in manual mode.
- Also, two modes are implemented for updating the Percona XtraDB Cluster `my.cnf` configuration file: in *automatic configuration update* mode Percona XtraDB Cluster Pods are immediately re-created to populate changed options from the Operator YAML file, while in *manual mode* changes are held until Percona XtraDB Cluster Pods are re-created manually.
- A separate service account is now used by the Operator's containers which need special privileges, and all other Pods run on default service account with limited permissions.
- [User secrets](#) are now generated automatically if don't exist: this feature especially helps reduce work in repeated development environment testing and reduces the chance of accidentally pushing predefined development passwords to production environments.
- The Operator [is now able to generate TLS certificates itself](#) which removes the need in manual certificate generation.
- The list of officially supported platforms now includes [Minikube](#), which provides an easy way to test the Operator locally on your own machine before deploying it on a cloud.
- Also, Google Kubernetes Engine 1.14 and OpenShift Platform 4.1 are now supported.

[Percona XtraDB Cluster](#) is an open source, cost-effective and robust clustering solution for businesses. It integrates Percona Server for MySQL with the Galera replication library to produce a highly-available and scalable MySQL® cluster complete with synchronous multi-primary replication, zero data loss and automatic node provisioning using Percona XtraBackup.

Help us improve our software quality by reporting any bugs you encounter using [our bug tracking system](#).

# Percona Kubernetes Operator for Percona XtraDB Cluster 1.0.0

Percona announces the general availability of *Percona Kubernetes Operator for Percona XtraDB Cluster 1.0.0* on May 29, 2019. This release is now the current GA release in the 1.0 series. [Install the Kubernetes Operator for Percona XtraDB Cluster by following the instructions](#). Please see the [GA release announcement](#) . All of Percona's software is open-source and free.

The Percona Kubernetes Operator for Percona XtraDB Cluster automates the lifecycle and provides a consistent Percona XtraDB Cluster instance. The Operator can be used to create a Percona XtraDB Cluster, or scale an existing Cluster and contains the necessary Kubernetes settings.

The Percona Kubernetes Operators are based on best practices for configuration and setup of the Percona XtraDB Cluster. The Operator provides a consistent way to package, deploy, manage, and perform a backup and a restore for a Kubernetes application. Operators deliver automation advantages in cloud-native applications.

The advantages are the following:

- Deploy a Percona XtraDB Cluster environment with no single point of failure and environment can span multiple availability zones (AZs).
- Deployment takes about six minutes with the default configuration.
- Modify the Percona XtraDB Cluster size parameter to add or remove Percona XtraDB Cluster members
- Integrate with Percona Monitoring and Management (PMM) to seamlessly monitor your Percona XtraDB Cluster
- Automate backups or perform on-demand backups as needed with support for performing an automatic restore
- Supports using Cloud storage with S3-compatible APIs for backups
- Automate the recovery from failure of a single Percona XtraDB Cluster node
- TLS is enabled by default for replication and client traffic using Cert-Manager
- Access private registries to enhance security
- Supports advanced Kubernetes features such as pod disruption budgets, node selector, constraints, tolerations, priority classes, and affinity/anti-affinity
- You can use either PersistentVolumeClaims or local storage with hostPath to store your database
- Customize your MySQL configuration using ConfigMap.

## Installation

Installation is performed by following the documentation installation instructions for [Kubernetes](#) and [OpenShift](#).

---